



LEDko EXT T/D

Product code: T CRI 80 - F029E001A / T CRI 90 - F029C001A
D CRI 80 - F029F001A / D CRI 90 - F029D001A

KEY FEATURES

- Light source: modular Tungsten or Daylight COB LED
- Thick aluminum, long lasting light source in long lasting body
- No maintenance required
- Profile Zoom 14° - 35°



SPECIFICATIONS

- Fixed white color temperature at 3200 K or 5600 K
- Four blade framing system, each shutter blade is adjustable for radial position and angle
- Internal gobo holder
- Electronic 16 bit dimming with 3 selectable curves (exponential, logarithmic, linear)
- Synchronized, random or pulse electronic strobe
- Flicker-free operation with LEDs frequency controlled via DMX from 600 Hz to 19000 Hz
- Fan setting with 2 different options (auto, silent)
- Weatherproof rating IP65
- Profile zoom 14° - 35°

LIGHT SOURCE

- Modular COB LED
- LEDs life: 20.000 hours at 70% lumen intensity maintenance

PHYSICAL SIZE

- Length: 658 mm (25.9 in)
- Width: 252.6 mm (9.94 in)
- Height: 248 mm (7.0 in)
- Height with bracket: 405 mm (15.94 in)
- Weight: 14.0 Kg (30.8 lbs)


CONTROL PROTOCOL AND PROGRAMMING

- USITT DMX512A
- Setting, addressing, testing and measurements via LEDs display
- DMX channel: 5/1
- Remote Device Management (RDM)

ELECTRICAL SPECIFICATIONS AND CONNECTIONS

- AC power: 90-230V, auto sensing, 50/60 Hz
- Internal cable without power plug
- Max power consumption: 200 W
- Power consumption: 0.88 A at 230 V, 2.25 A at 90 V - $\cos\phi$ 0.95
- DMX data in/out: 5 pin locking XLR

DRAWING SIZE

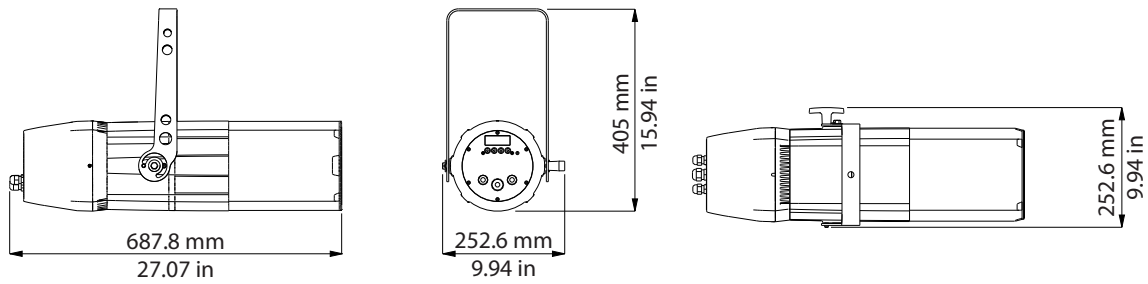

DMX CHARTS

8 channels	
1	master dimmer
2	spare channel
3	dimmer fine
4	strobe
5	special function

4 channels	
1	master dimmer

PHOTOMETRIC DATA

The LEDko EXT Photometric Data may be downloaded from www.coemar.com.