



# ParLite Led 3200 K

Product code: F007E000B

## KEY FEATURES

- 3200 K white light output at its best
- Ideal digital substitute of a traditional spot fresnel 650 W
- 75% to 82% energy saving compared to traditional technology at the same brightness
- Thick aluminium, long lasting light source in long lasting body
- Variable light projection angles via quick lens change (12°, 30°, 13°x 40°, 50°, 110°)
- Internal/External gel frame (standard size)
- Smart build "Quick Stand" tucked into yoke
- No fan, no maintenance, no noise



## SPECIFICATIONS

- LEDs White 3200 K
- Standard lens 12°
- Electronic dimmer (2 different curves selectable)
- Electronic strobe, synchronized, random, pulse effect
- Flicker free
- ETL approved
- Double yoke for easy ground standing or truss hanging
- Weatherproof rating IP 20 or IP 65

## LIGHT SOURCE

- 36 LEDs Cree (White 3200 K)
- LEDs life: 20.000 hours at 70% lumen intensity maintenance

## PHYSICAL SIZE

- Length: 211 mm (8.3 in)
- Width: 182 mm (7.1 in)
- Height: 267 mm (10.5 in)
- Weight: 3.5 kg (7.7 lbs)

## CONTROL PROTOCOL AND PROGRAMMING

- USITT DMX512
- DMX channels: 6
- Setting and addressing: binary dip switch or remotely
- Remote Device Management (RDM)


## ELECTRICAL SPECIFICATIONS AND CONNECTIONS

- AC power: 100-250 V, auto sensing, 50/60 Hz, 2 m (6.6 ft) integral cable without power plug
- Power consumption: 0.2 A at 230 V, 0.5 A at 115 V - cosφ 0.6
- DMX data in/out: 5 pin locking XLR

## ACCESSORIES

- 30° lens kit (# 9167)
- 50° lens kit (# 9167/3)
- 40°x 13° elliptical lens kit (# 9167/2)
- 110° flood reflector (# 9168)
- Support color frame holder  
(black: #10007A001, silver: # 10007A002)
- Frame for internal frost filter (# 9169)
- Frame for external frost filter (# 9169/1)
- 4 leaf barndoor (# 9164)
- IP65 rear panel (black: # 08E, silver: silver #08/1E)

## DRAWING SIZE

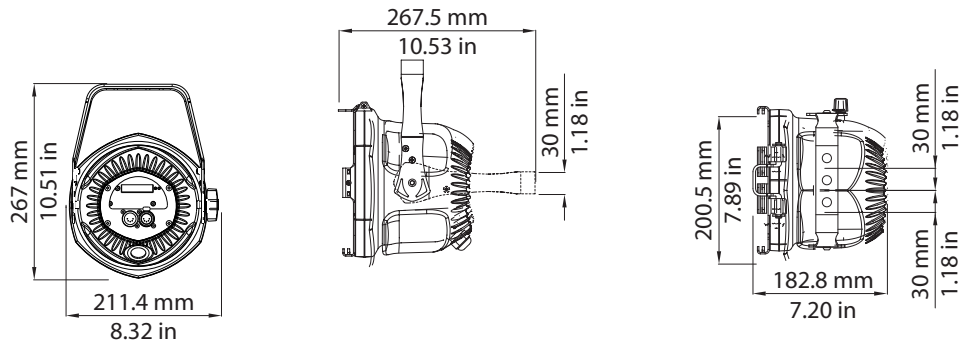

## DMX CHARTS

6 channels	
1	master dimmer
2	channel 1 / speed
3	channels 2 / speed
4	channel 3
5	strobe effect
6	automated functions

## PHOTOMETRIC DATA

The ParLite Led Photometric Data may be downloaded from [www.coemar.com](http://www.coemar.com).

## ACCESSORIES

Code	Description
BC10007A001	Support color frame holder black
BC10007A002	Support color frame holder silver
PC09164	4 leaf barndoor
PC09167/1	12° lens kit
PC09167	30° lens kit
PC09167/3	50° lens kit
PC09167/2	40° x 13° lens kit
PC09168	110° flood reflector
PC09169	Frame for internal frost filter
PC09169/1	Frame for external frost filter
G PAN22	Rear panel black
G PAN25	Rear panel silver
BC10007A007	Egg crate louvers