



ParLite Led VariWhite

Product code: F007G000B

KEY FEATURES

- Color temperature control, proportional from 2700 to 6500 K
- 75% to 82% energy saving compared to traditional technology at the same brightness
- Thick aluminium, long lasting light source in long lasting body
- Variable light project angles via quick lens change (12°, 30°, 13°x 40°, 50°, 110°)
- Internal/External gel frame (standard size)
- Smart build "Quick Stand" tucked into yoke
- No fan, no maintenance, no noise



SPECIFICATIONS

- Proportional control of white color temperature from 2700 K to 6500 K
- Standard lens 12°
- Electronic dimmer (2 different curves selectable)
- Electronic strobe, synchronized, random, pulse effect
- Flicker-free
- ETL approved
- Double yoke for easy ground standing or tuss hanging
- Weatherproof rating IP20 or IP65

LIGHT SOURCE

- 36 LEDs Cree
- LEDs life: 20.000 hours at 70% lumen intensity maintenance

PHYSICAL SIZE

- Length: 211 mm (8.3 in)
- Width: 182 mm (7.1 in)
- Height: 267 mm (10.5 in)
- Weight: 3.5 kg (7.7 lbs)

CONTROL PROTOCOL AND PROGRAMMING

- USITT DMX512
- DMX channels: 4
- Setting and addressing: binary dip switch or remotely
- Remote Device Management (RDM)


ELECTRICAL SPECIFICATIONS AND CONNECTIONS

- AC power: 100-250 V, auto sensing, 50/60 Hz, 2 m (6.6 ft) integral cable without power plug
- Power consumption: 0.2 A at 230 V, 0.5 A at 115 V - cosφ 0.6
- DMX data in/out: 5 pin locking XLR

ACCESSORIES

- 30° lens kit (# 9167)
- 50° lens kit (# 9167/3)
- 40°x 13° elliptical lens kit (# 9167/2)
- 110° flood reflector (# 9168)
- Support color frame holder
(black: #10007A001, silver: # 10007A002)
- Frame for internal frost filter (# 9169)
- Frame for external frost filter (# 9169/1)
- 4 leaf barndoor (# 9164)
- IP65 rear panel (black: # 08E, silver: silver #08/1E)

DRAWING SIZE

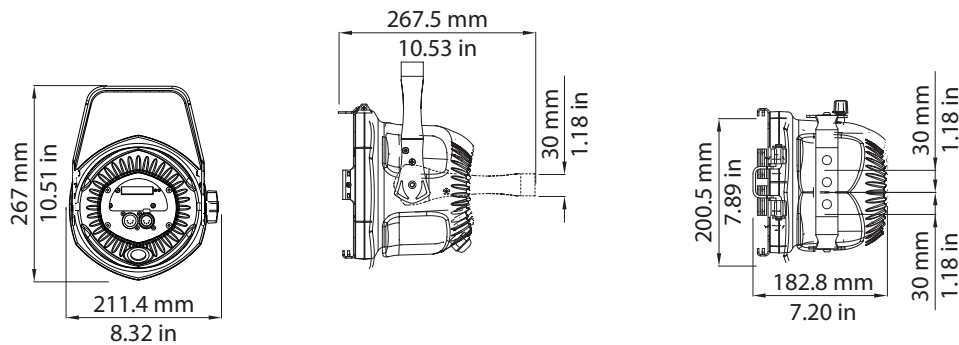

DMX CHARTS

4 channels	
1	master dimmer
2	fine white adjust +%
3	fine white adjust -%
Note 1: channel 2 and 3 have full effect when one of them have zero value. Note 2: measurements were performed with 12° optics	
4	strobe

PHOTOMETRIC DATA

The ParLite Led Photometric Data may be downloaded from www.coemar.com.

ACCESSORIES

Code	Description
BC10007A001	Support color frame holder black
BC10007A002	Support color frame holder silver
PC09164	4 leaf barndoor
PC09167/1	12° lens kit
PC09167	30° lens kit
PC09167/3	50° lens kit
PC09167/2	40° x 13° lens kit
PC09168	110° flood reflector
PC09169	Frame for internal frost filter
PC09169/1	Frame for external frost filter
GPAN22	Rear panel black
GPAN25	Rear panel silver
BC10007A007	Egg crate louvers