


## Narrow


Distance (m.)	2,5	5	7,5	10	12,5	15	17,5	20	22,5	25
Luminous emittance(Lux)	86240	21560	9582	5390	3450	2390	1760	1348	1065	862
Ø m.	0,39	0,79	1,18	1,57	1,97	2,36	2,75	3,15	3,54	3,94

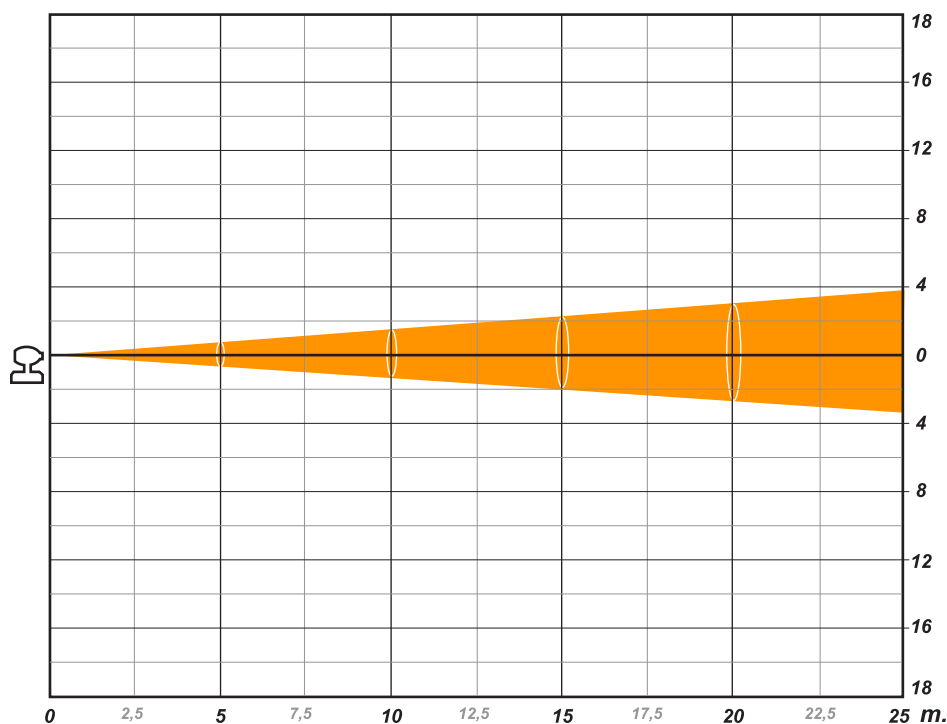

Angle: 9° \*

## Wide

Distance (m.)	2,5	5	7,5	10	12,5	15	17,5	20	22,5	25
Luminous emittance(Lux)	5270	1318	586	329	211	146	108	82	65	53
Ø m.	1,34	2,68	4,02	5,36	6,70	8,04	9,38	10,72	12,06	13,40

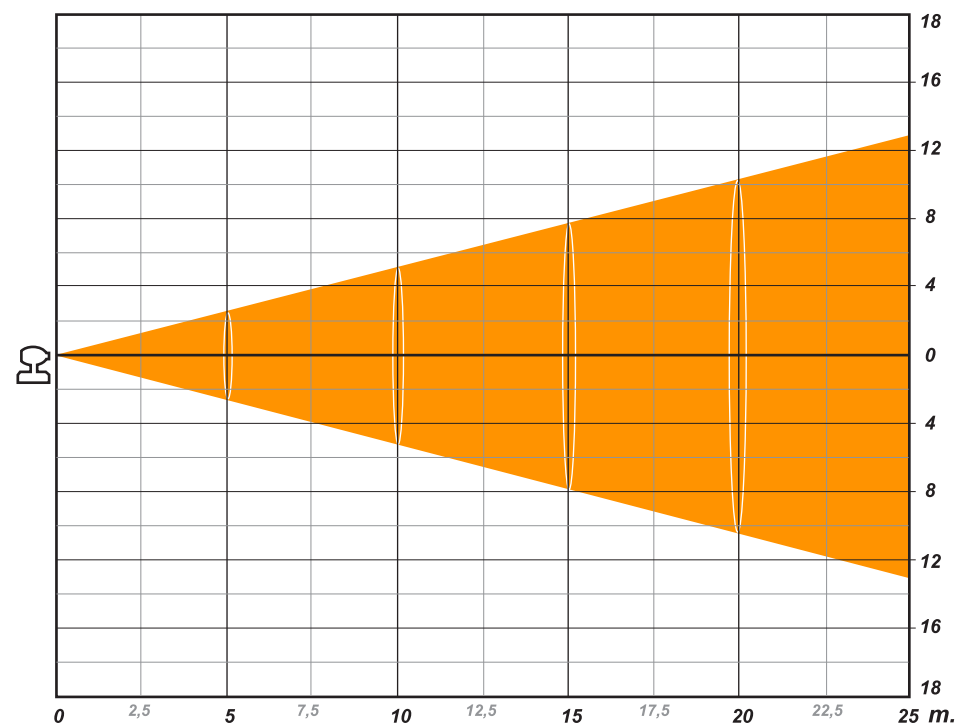

Angle: 30° \*

\* Measured at open beam.  
Different beam angles  
will be measured with gobos,  
iris and defocused beam.



via Inghilterra 2/A - 46042 Castel Goffredo (Mantova) Italy  
ph. +39 0376 77521 - fax +39 0376 780657  
info@coemar.com

Duplication of this drawing, either full or in part, is strictly  
prohibited without prior written authorization from coemar.  
Questo disegno non può essere copiato, riprodotto,  
mostrato a terzi senza nostra autorizzazione

Prodotto/Product:  
**Infinity Spot S**

Lampada/Lamp: Philips MSR GOLD 300 fast fit

Date : 26/11/08

Ver. N° 1.0