


How to mount a ReLite Led Kit on a Robert Juliat luminaire


Model tested: S 613/614 | Lamp: 1000W

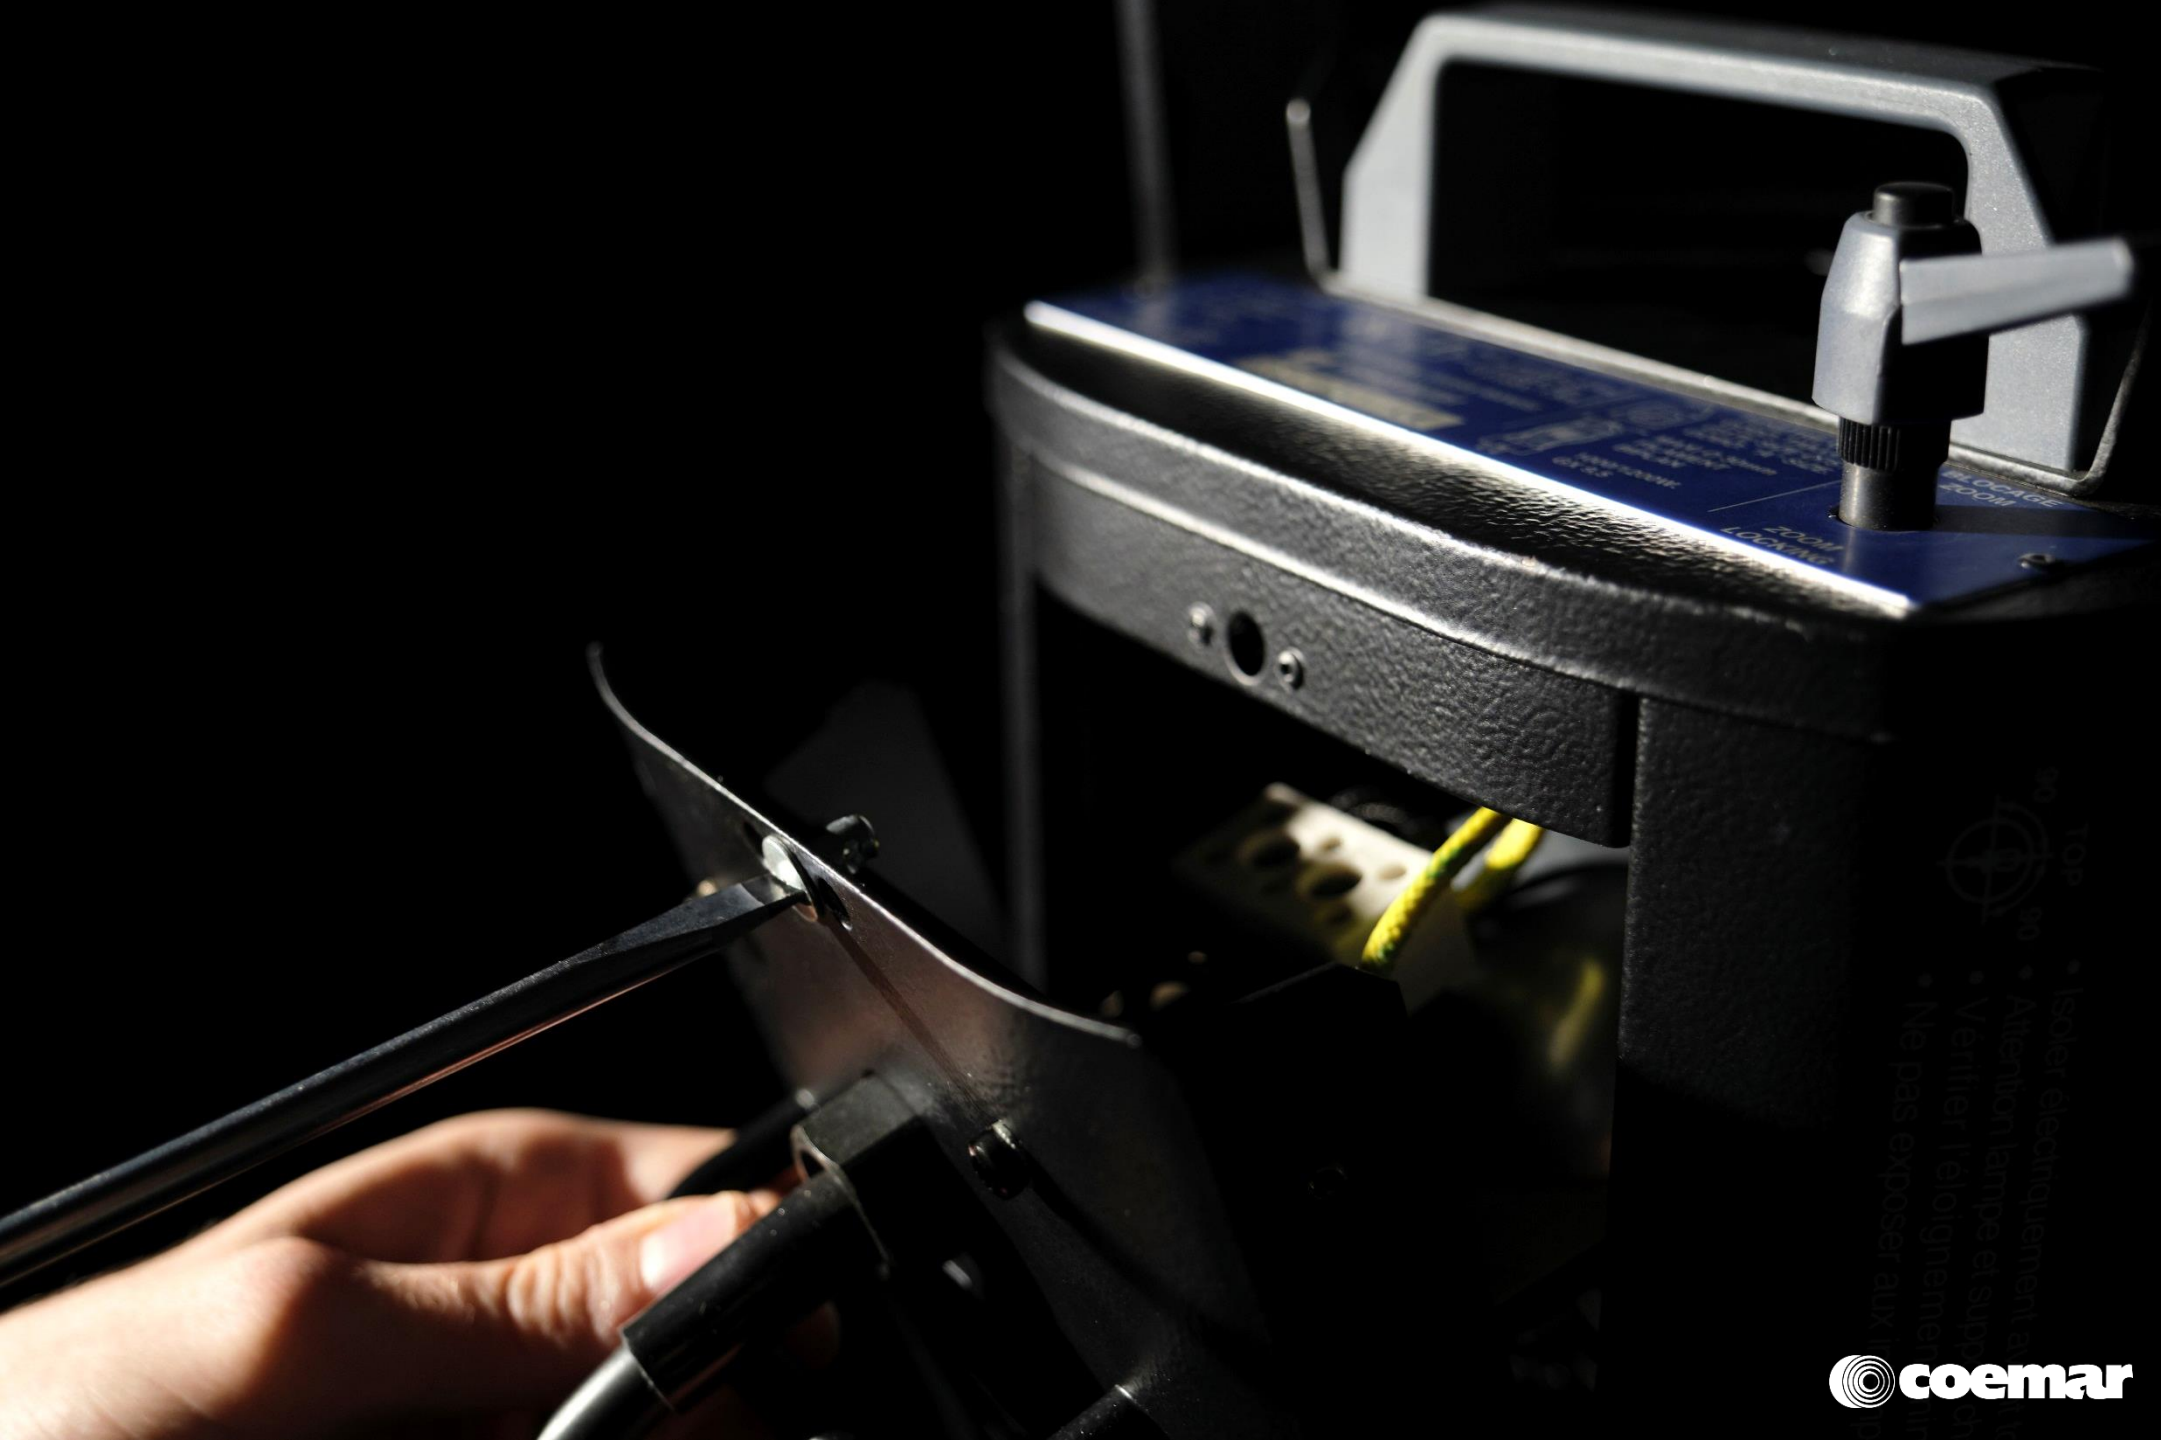


 **robert juliat**

- TOP
90°
- Disconnect from the mains before any servicing.
 - Lamp and lampholder hot ; wait until the unit is cold, before servicing.
 - Check the distance from any flammable material.
 - Do not expose to bad weather. Do not cover. Service only by qualified technician.


Remove the
light bulb.

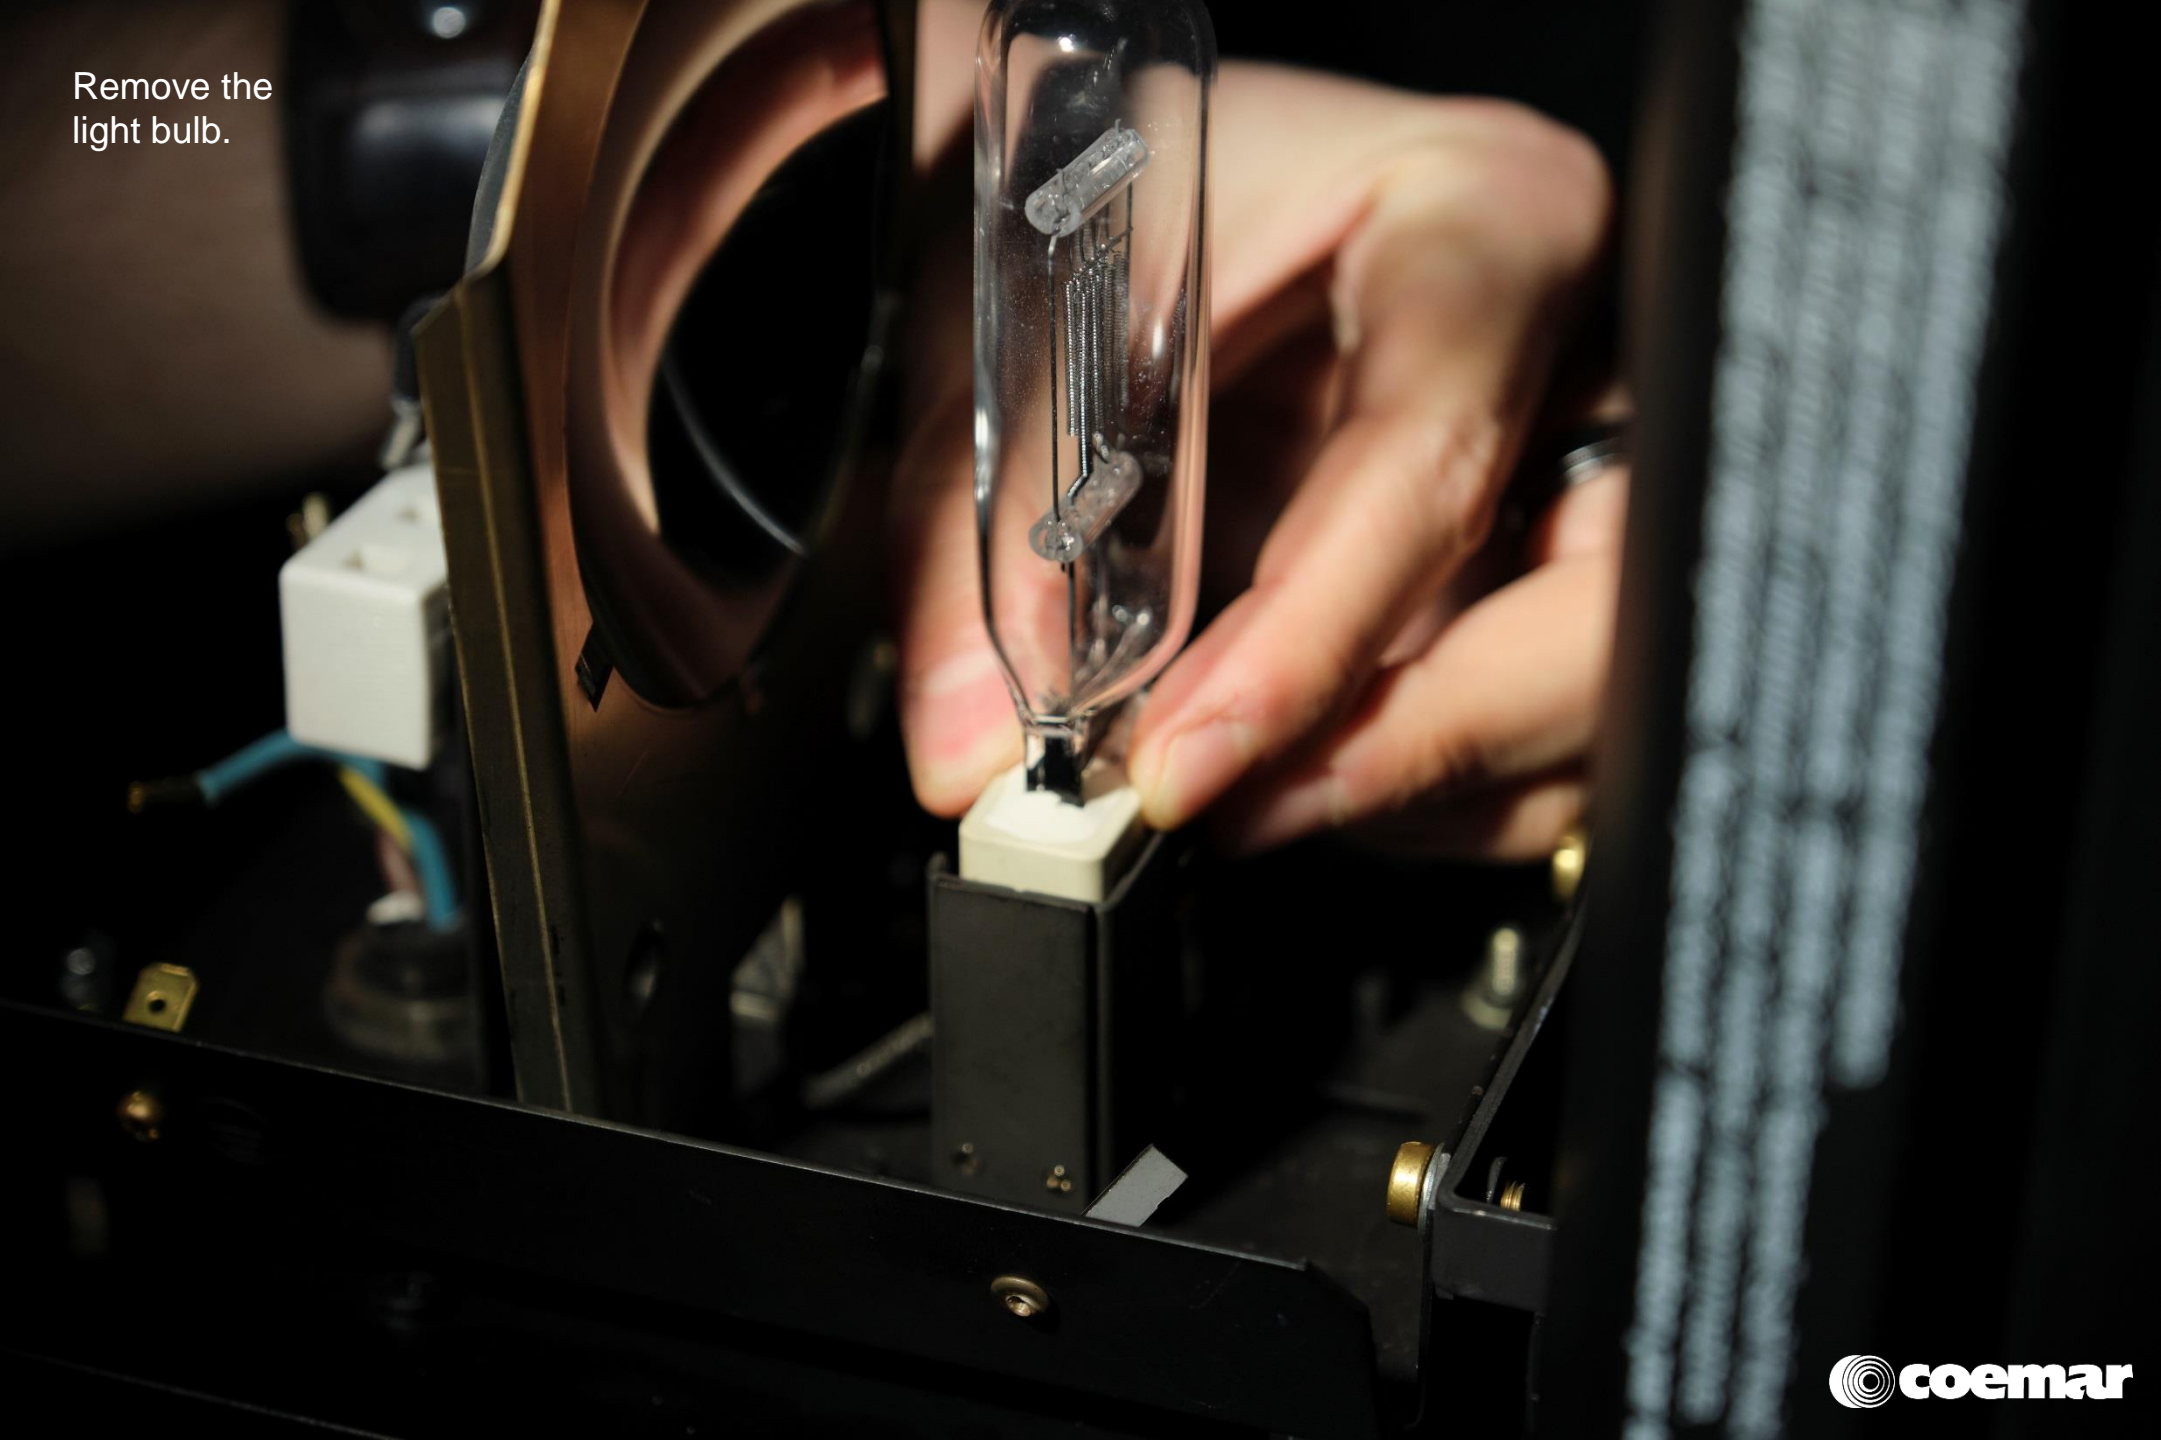


Loosen the screws
to remove the cables
from the clip.

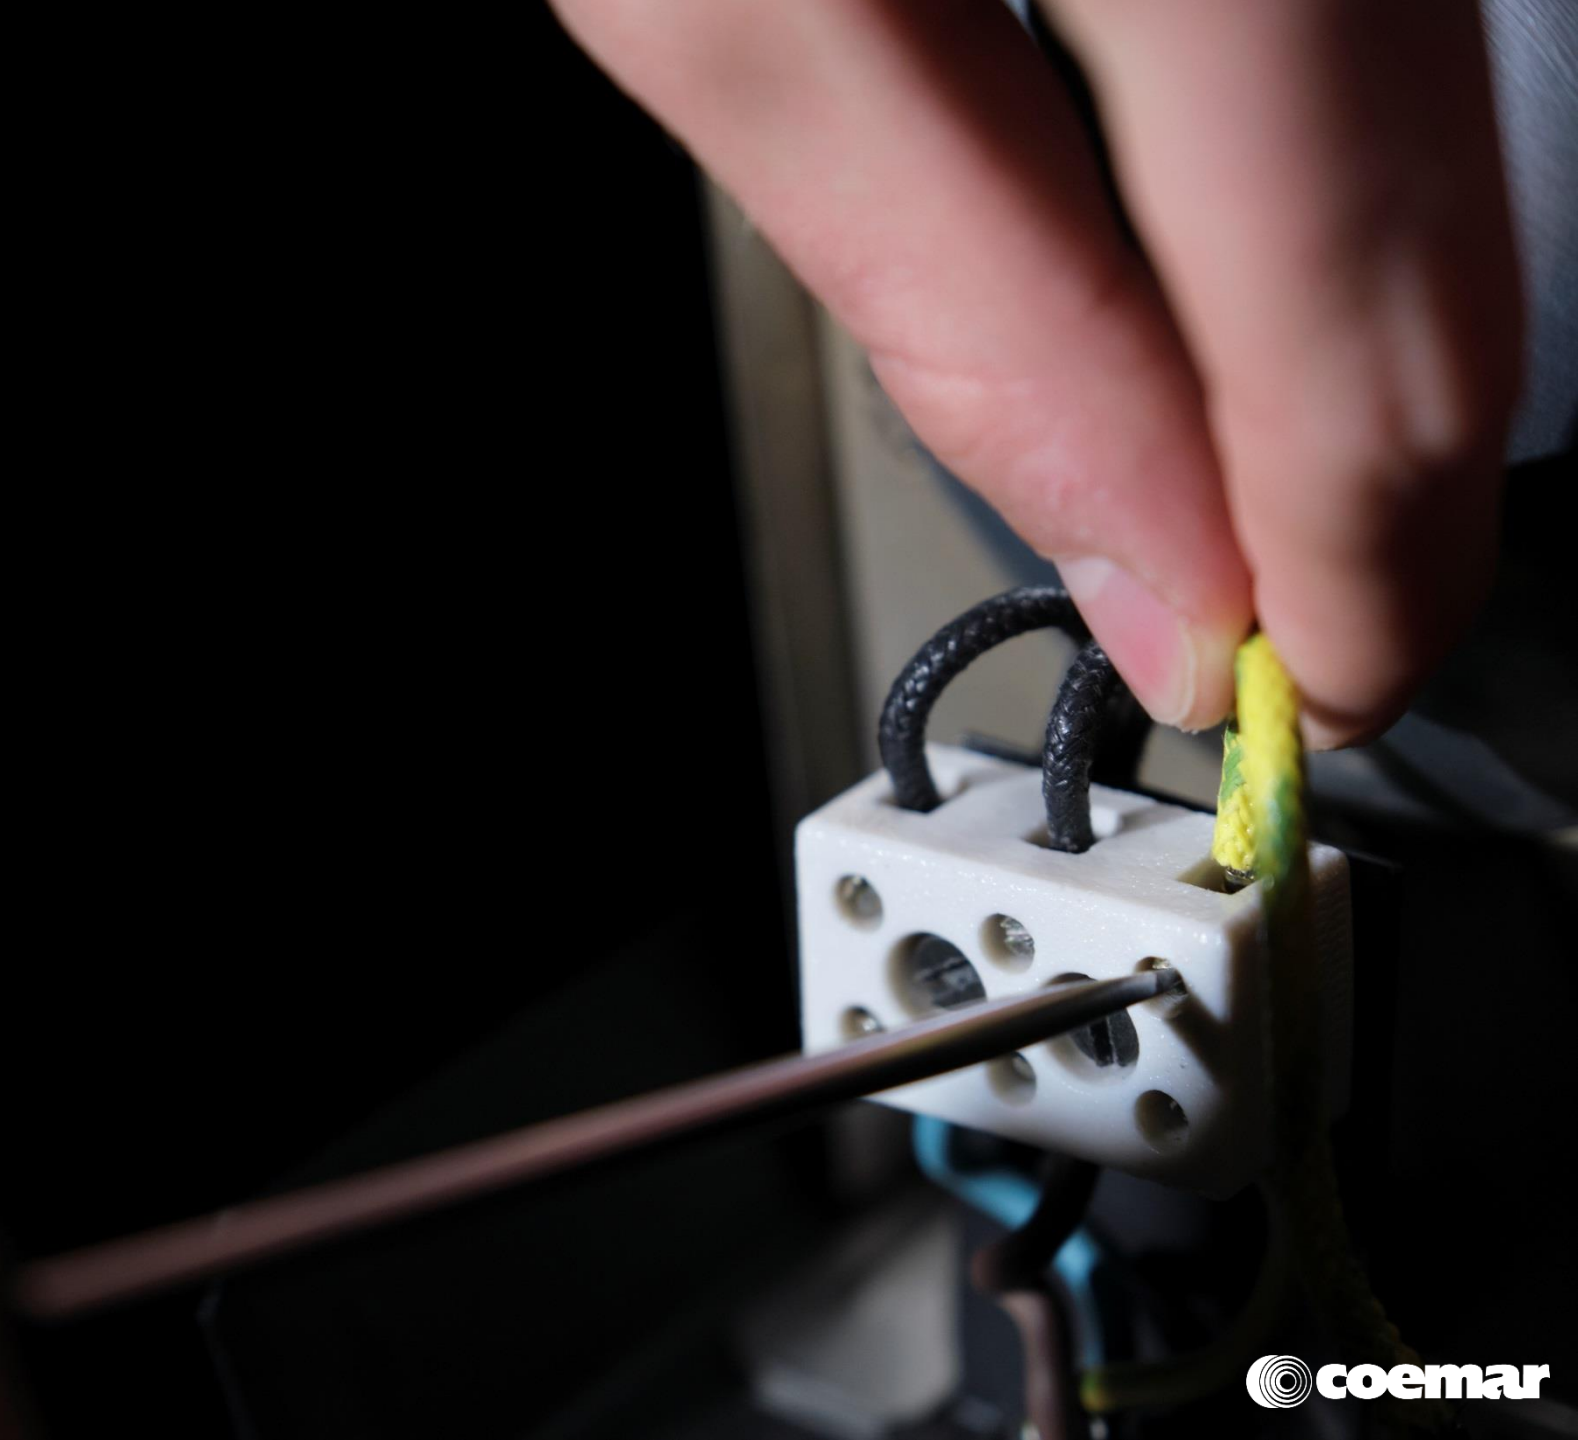


Disconnect the
ground wire.

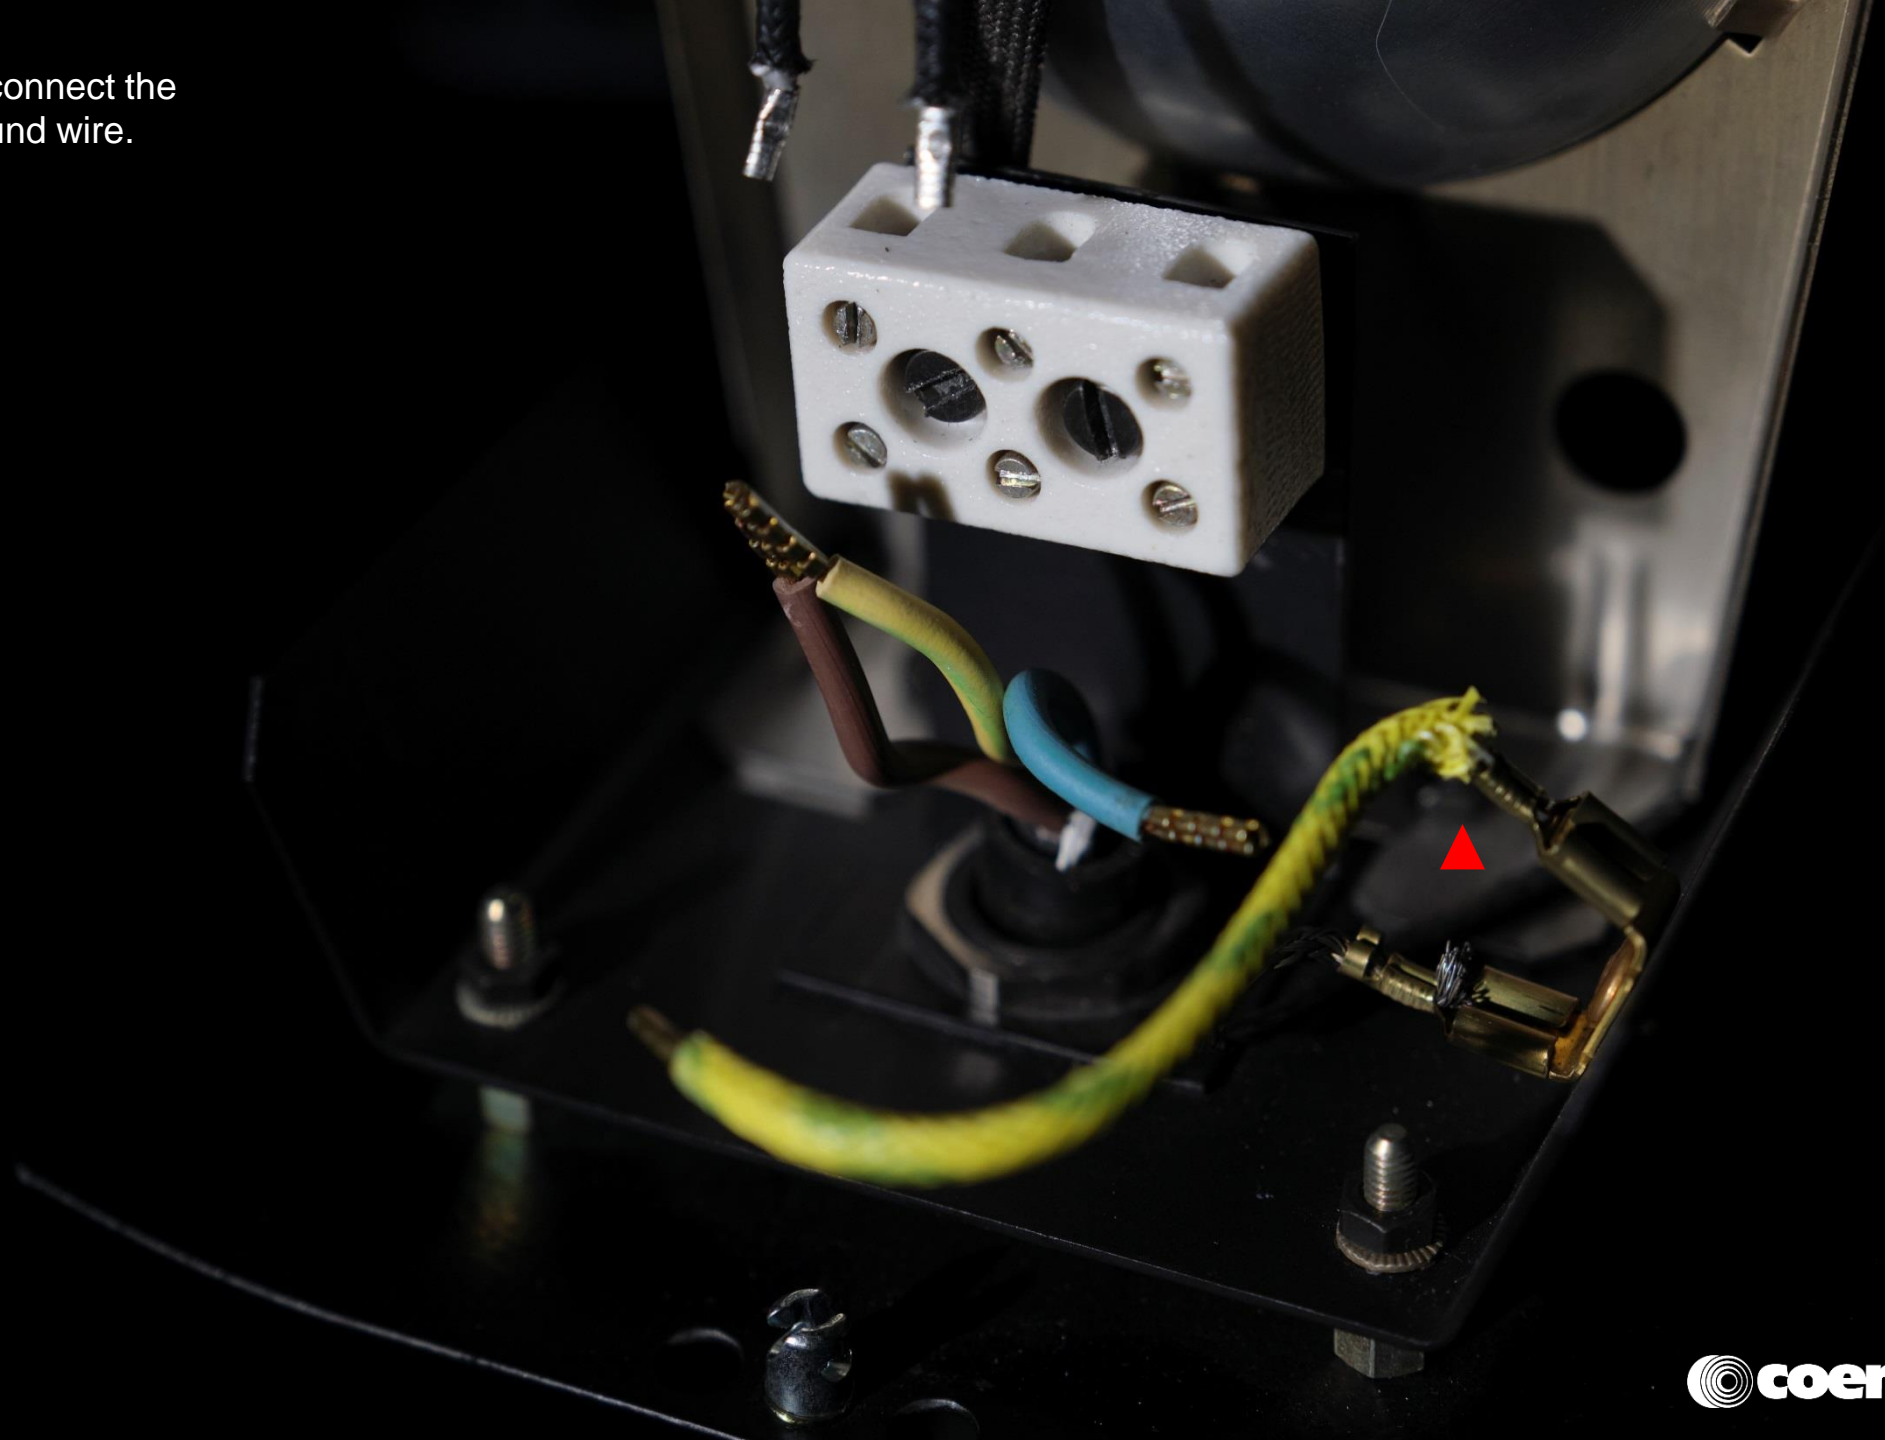

The reflector needs
to be removed too.
Loosen the nuts
before doing it.

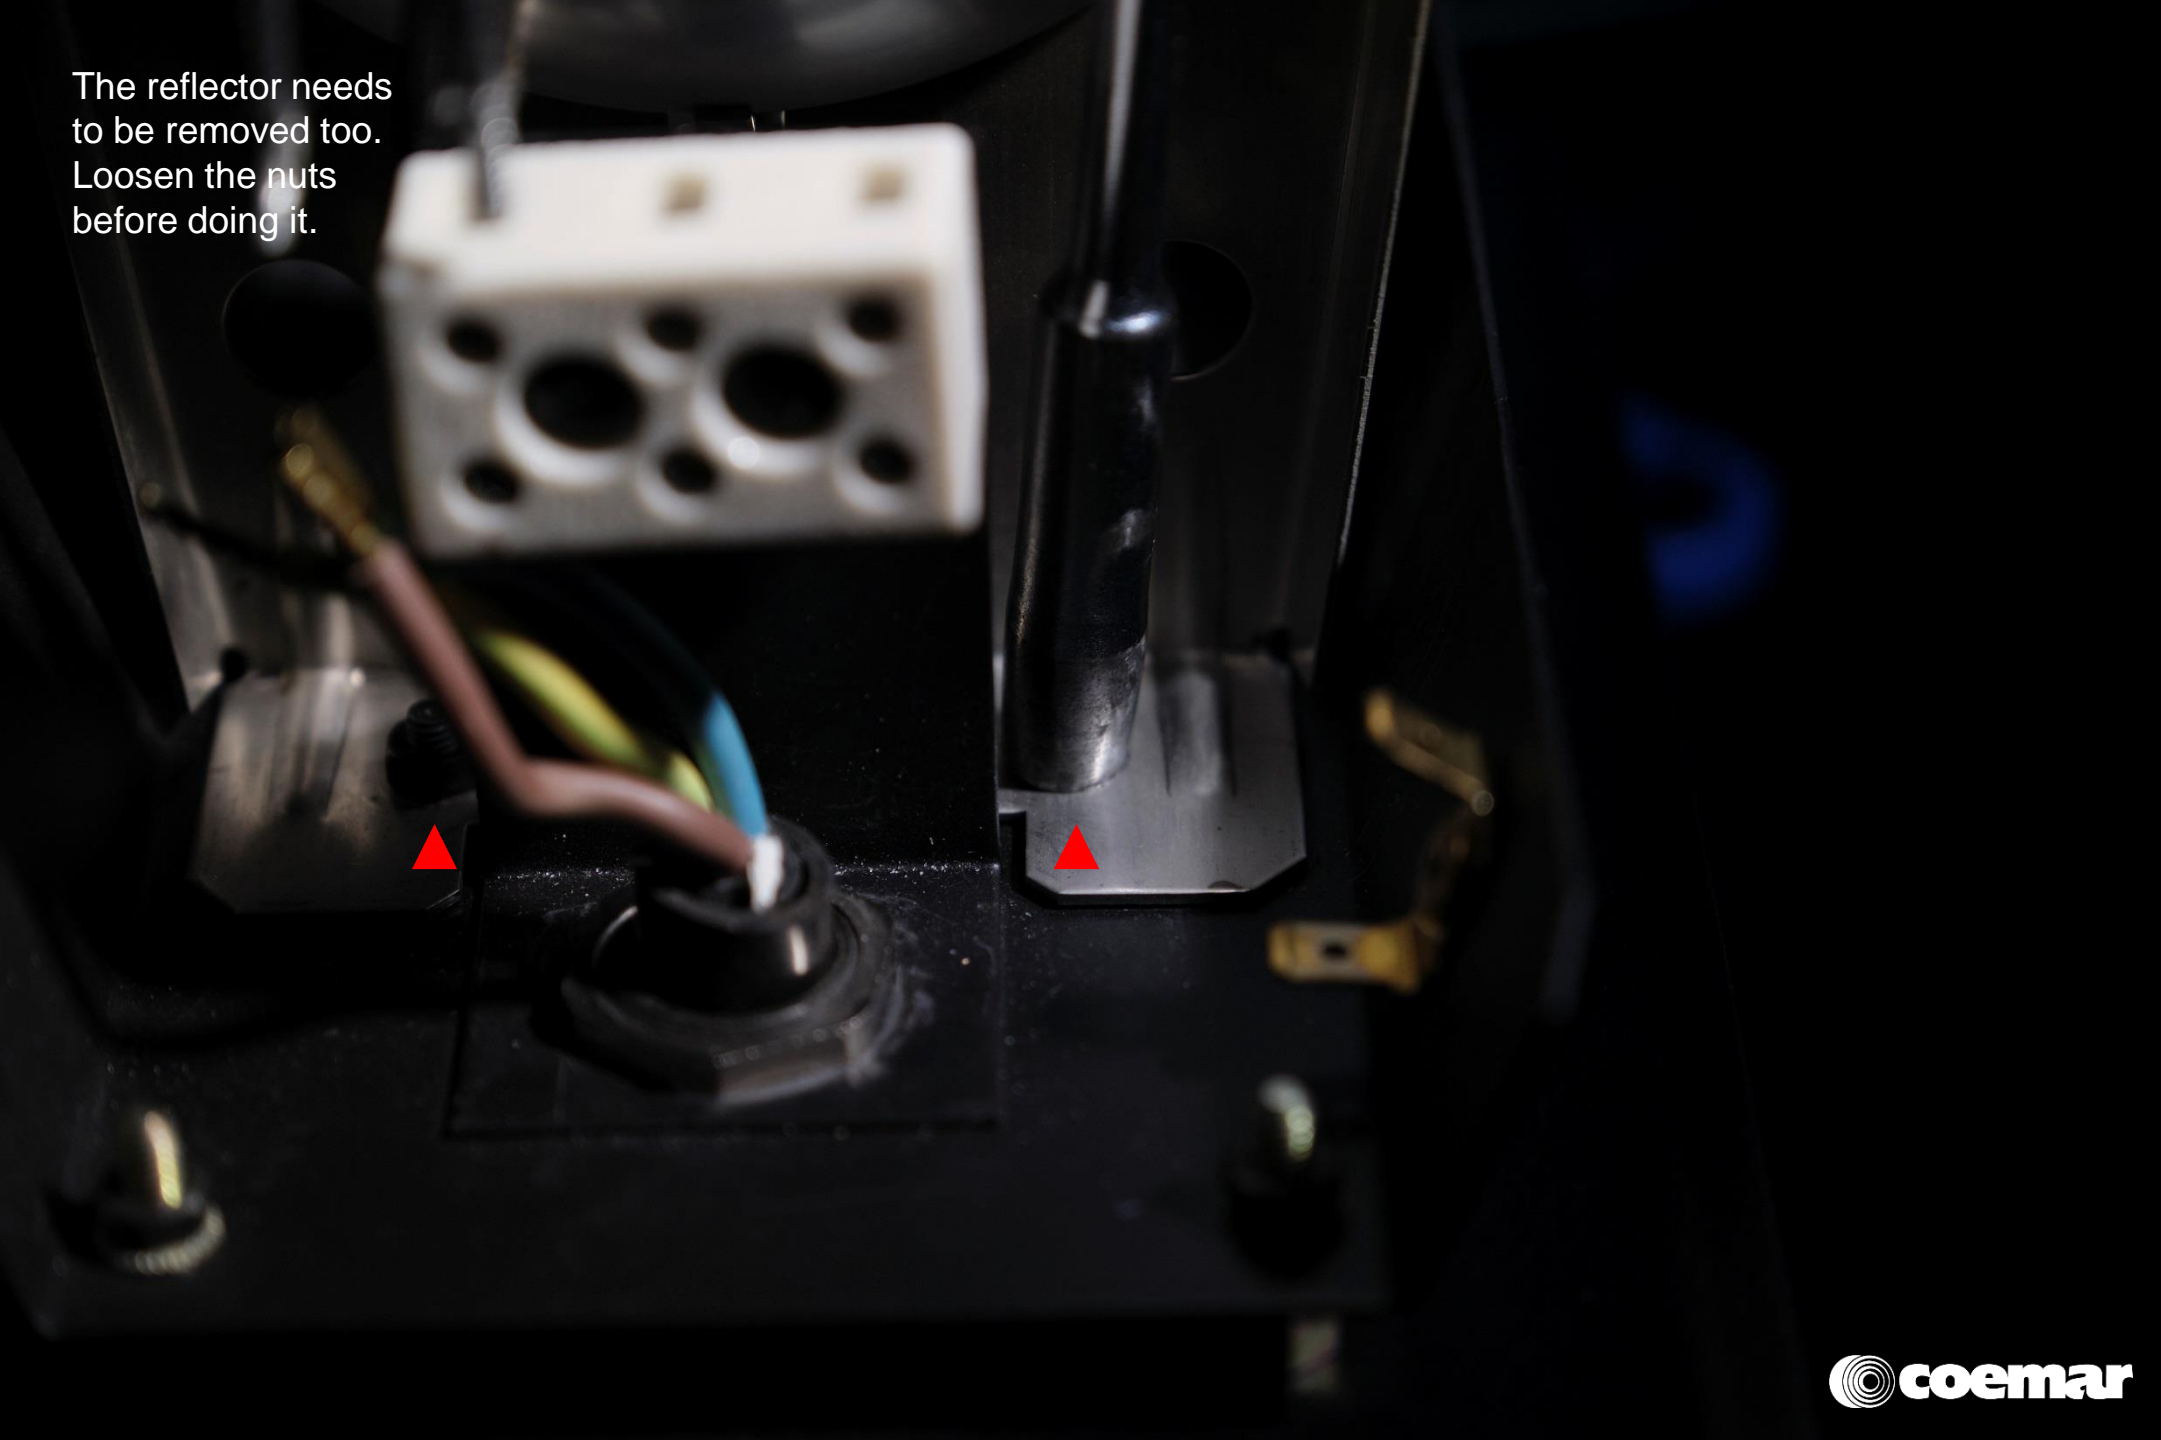

Remove the
reflector.

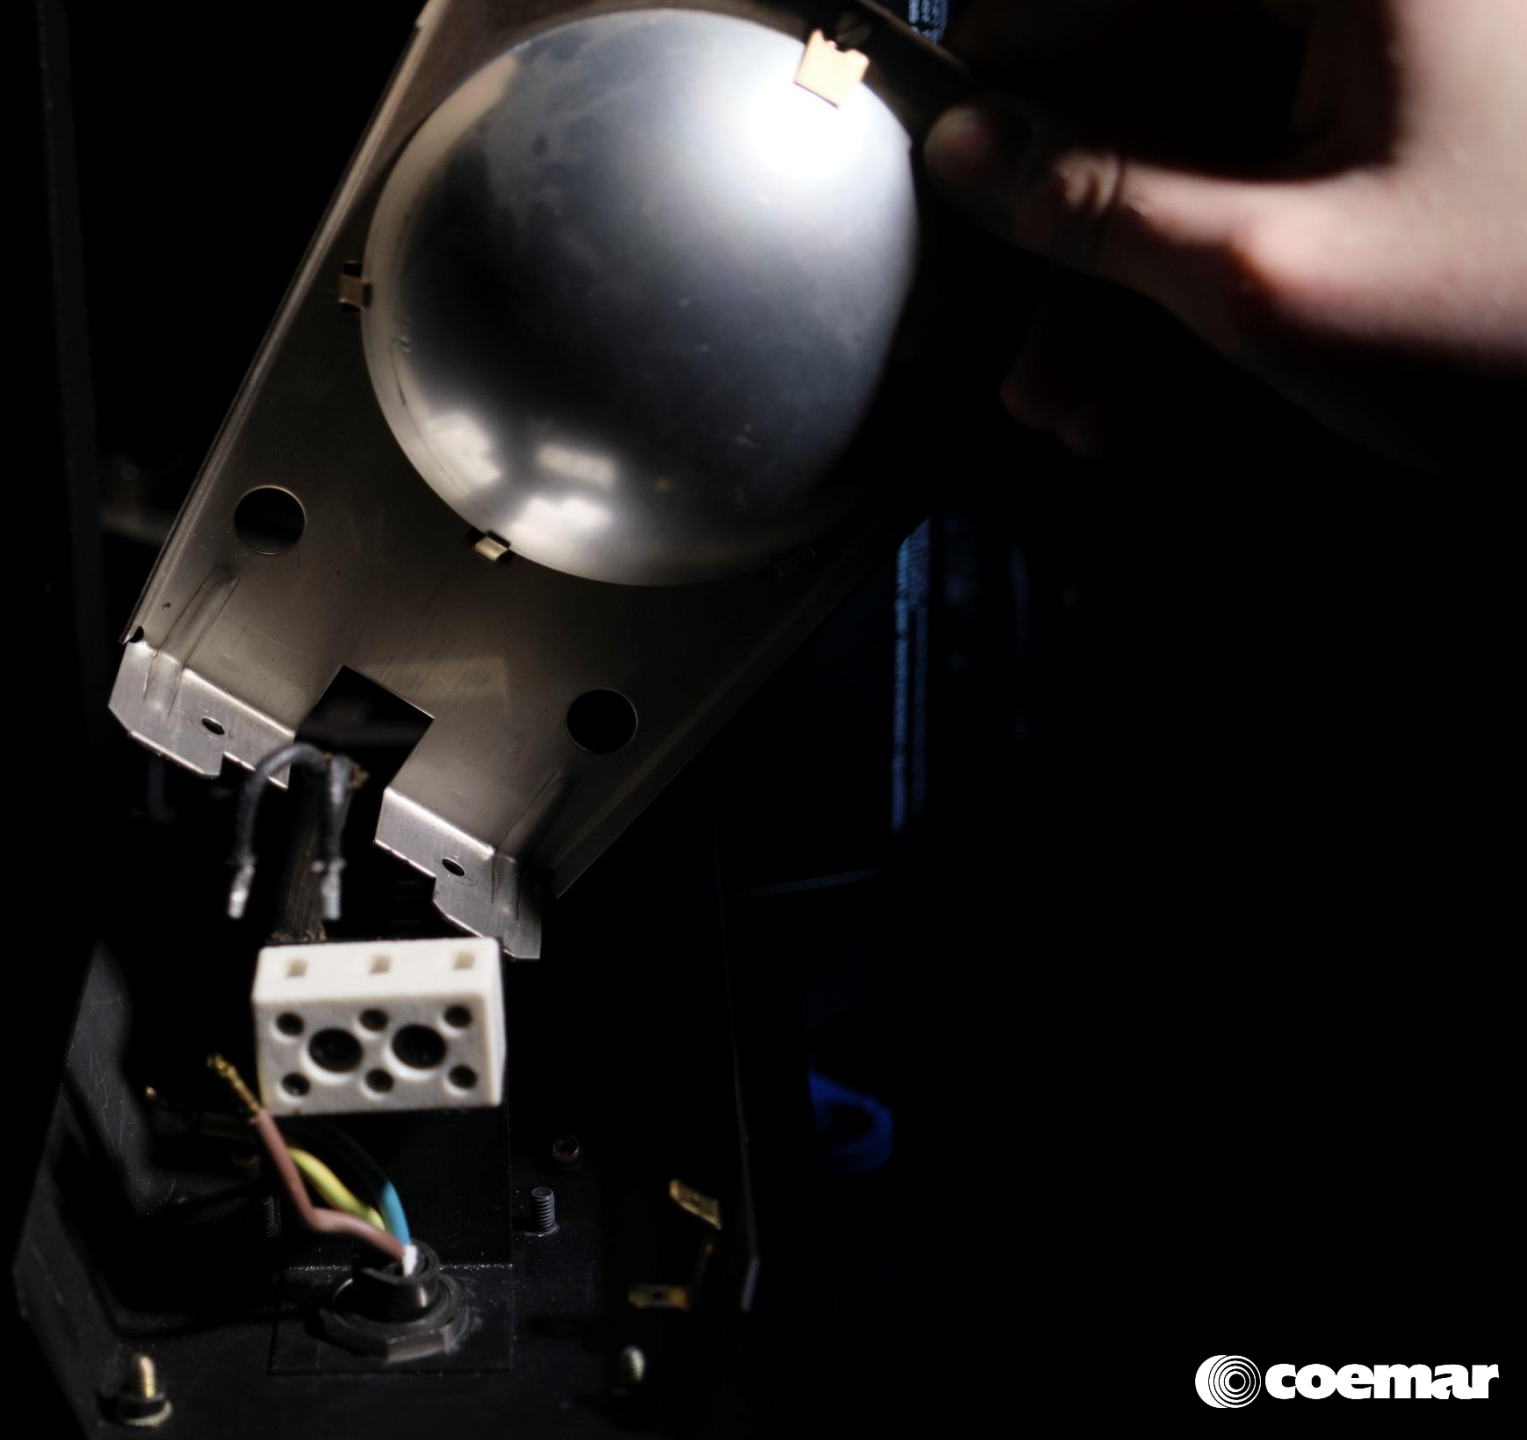

Loosen the nuts
and take out
the bulb holder.




Loosen the screws
to remove the clip.




Remove the
cable gland.



The luminaire is now
ready to be refitted
with LED.

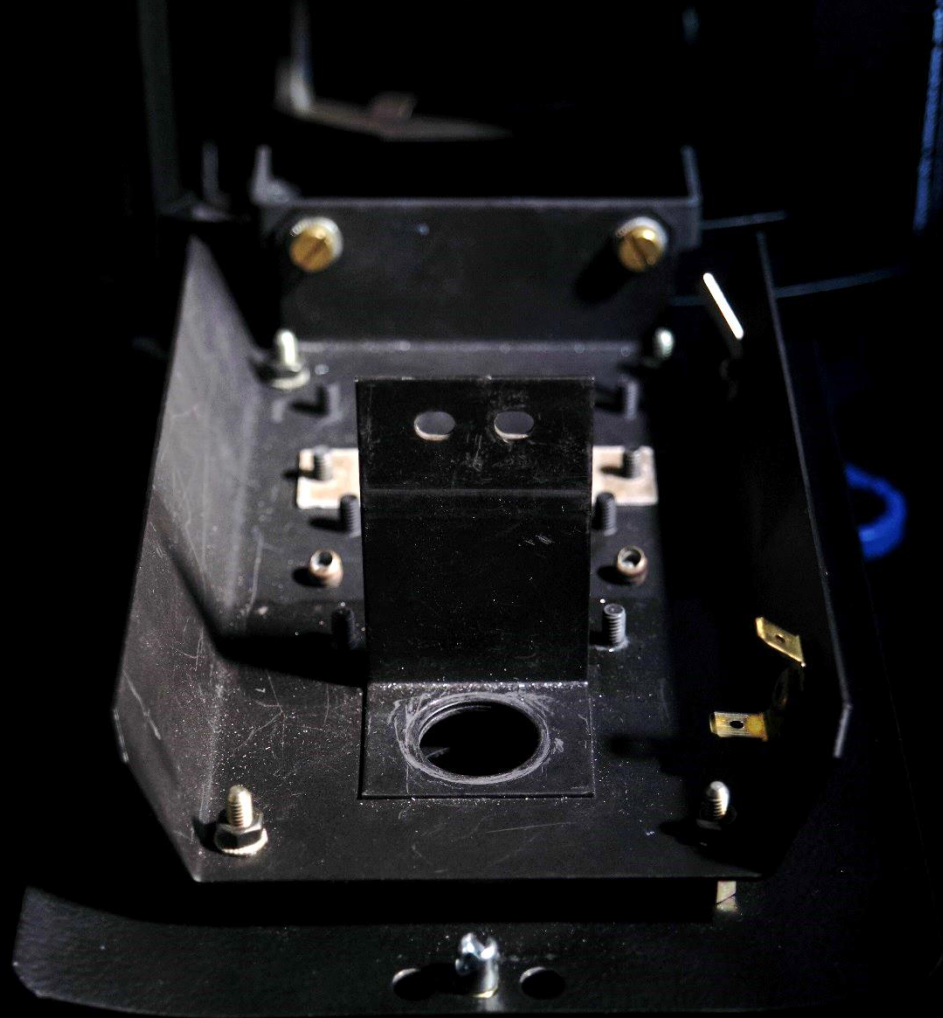

Fix the new LED
group to the lighting
fixture.

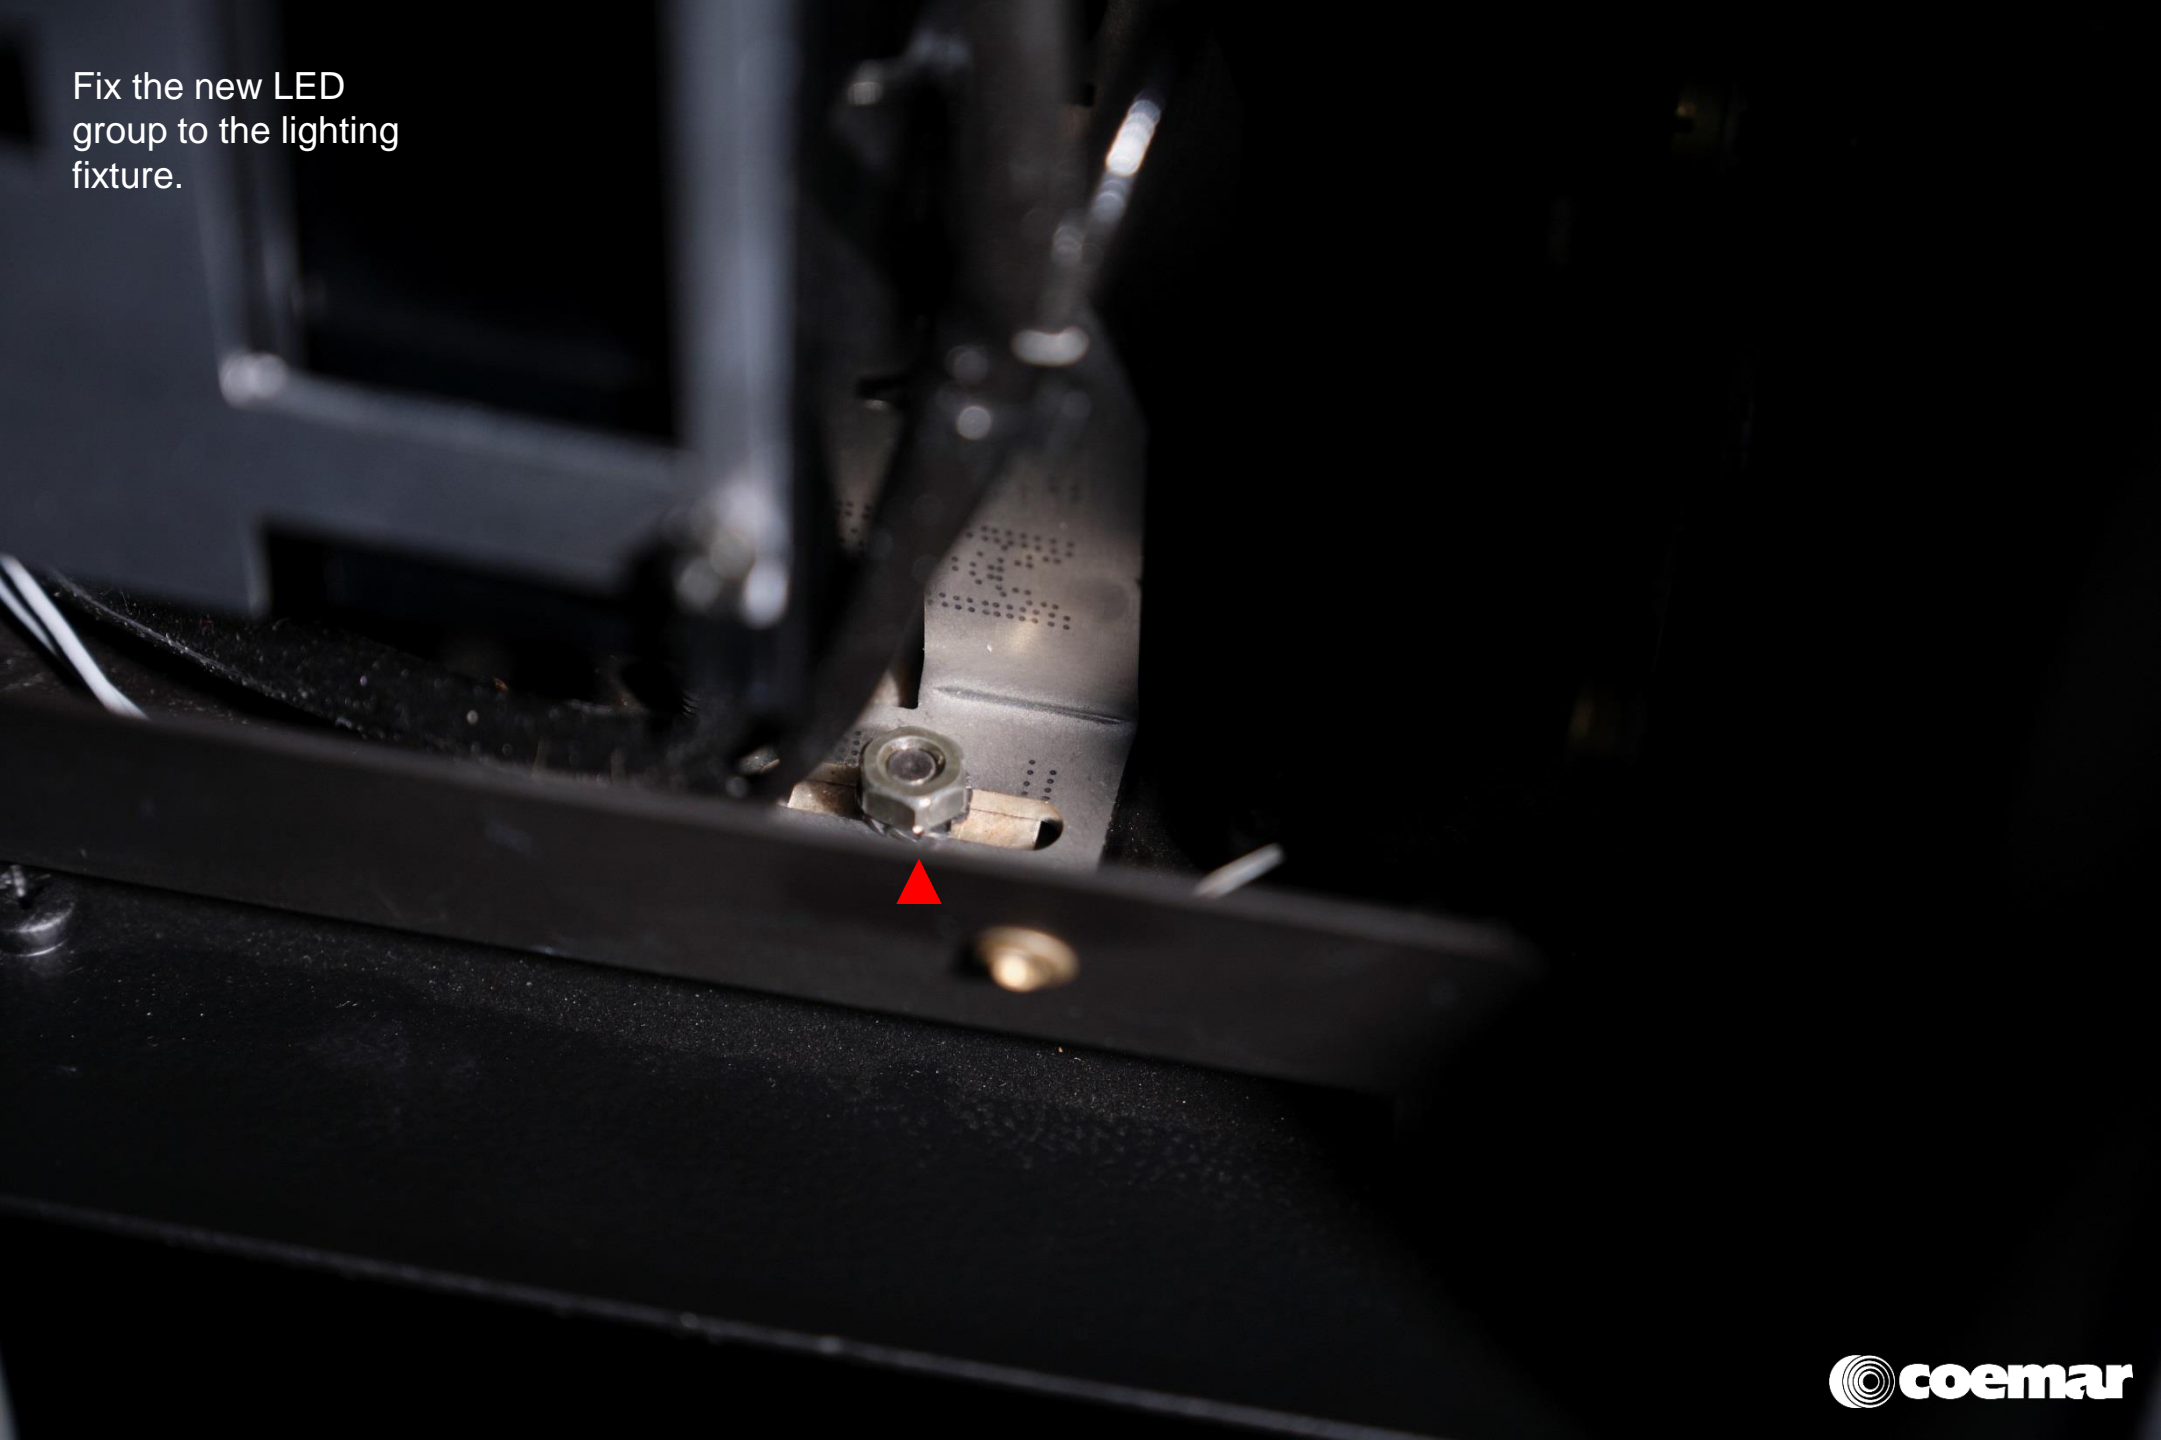

[illegible]


Ne pas exposer aux intempéries.

Attention que l'appareil soit froid avant utilisation.

Ne pas ouvrir l'intérieur d'une machine inflammable.

Intervention par technicien qualifié.

Connect the LED group to
the external power supply
box fixed to the yoke.

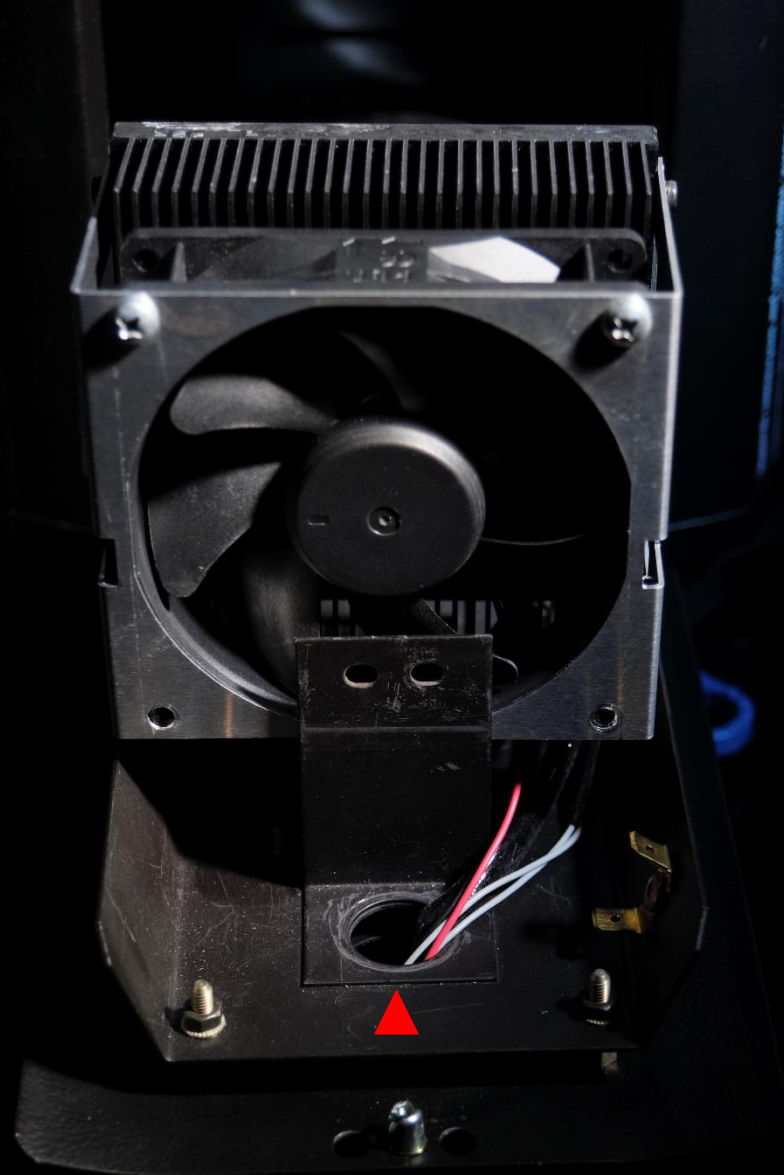

You are now ready to use
your new LED light.



