


Distance (m.)	6	12	18	24	30	36	42	48	54	60
Luminous emittance (Lux)	6250	1563	694	391	250	174	128	98	77	63
1/2 peak angle @ m.	0.42	0.84	1.26	1.68	2.10	2.51	2.93	3.35	3.77	4.19
1/10 peak angle @ m.	0.84	1.68	2.52	3.36	4.20	5.03	5.87	6.71	7.55	8.39



1/2 peak angle: 4°

1/10 peak angle: 8°

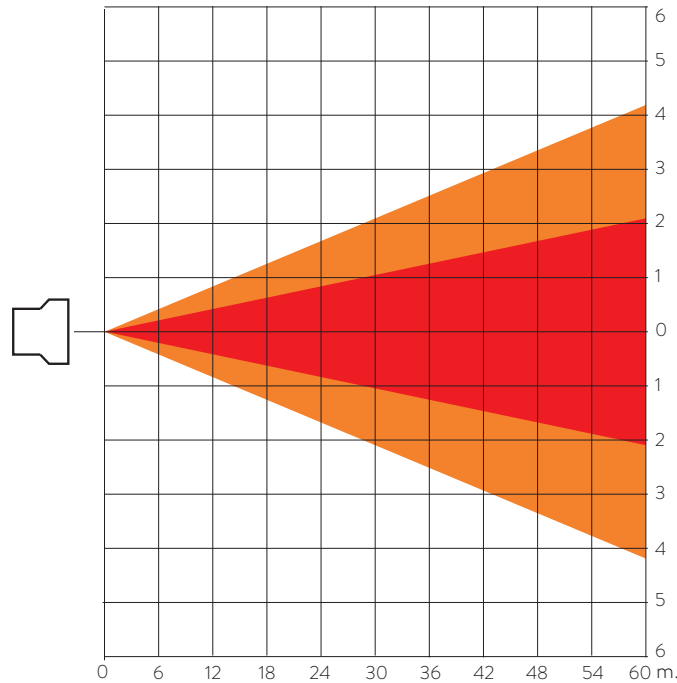

LIGHT EMOTION

Castiglione delle Stiviere (MN) - Italy

Via Carpenedolo, 90

Tel. +39 0376 1514412 - Fax. +39 0376 1514380

www.coemar.com

Duplication of this drawing, either full or in part, is strictly prohibited without prior written authorization from Coemar.

Questo disegno non può essere copiato, riprodotto, mostrato a terzi senza nostra autorizzazione.

Prodotto / Product

ParLite Led ACL Tungsten

Light source

3.200 K - CRI 80

Date

19.10.2020

Ver. N°

1.1