


i Profile FLEX

		distance (Mt)									
Light output (lux)		5	10	15	20	25	30	35	40	45	50
White	Max Zoom	14280	3570	1587	893	571	397	291	223	176	143
2000 W.	Min Zoom	130400	32600	14489	8150	5216	3622	2661	2038	1610	1304
White	Max Zoom	9080	2270	1009	588	363	252	185	142	112	91
1250 W.	Min Zoom	80400	20100	8933	5025	3216	2233	1641	1256	993	804

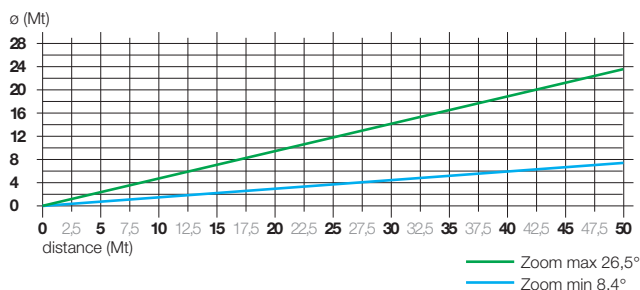

		distance (Mt)									
Light output		5	10	15	20	25	30	35	40	45	50
Zoom min (lux)		5	10	15	20	25	30	35	40	45	50
Magenta	Best color	6200	1550	689	388	248	172	127	97	77	62
	Traditional	4120	1030	458	258	165	114	84	64	51	41
Cyan	Best color	50400	12600	5600	3150	2016	1400	1029	788	622	504
	Traditional	25800	6450	2867	1613	1032	717	527	403	319	258
Yellow	Best color	52800	13200	5867	3300	2112	1467	1078	825	652	528
	Traditional	52800	13200	5867	3300	2112	1467	1078	825	652	528
Red	Best color	2640	660	293	165	106	73	54	41	33	26
	Traditional	1520	380	169	95	61	42	31	24	19	15
Green	Best color	15400	3850	1711	963	616	428	314	241	190	154
	Traditional	7480	1870	831	468	299	208	153	117	92	75

Flex line utilize only Philips MSR-2000 SA lamps

modifications		 CASTEL GOFFREDO (MN) ITALIA VIA INGHILTERRA ZONA IND. EST tel: (0376) 77521 fax: (0376) 780657 - 779889 - 780844 internet address: technical.dept@coemar.com	Description:	
			light diagram:	
			iProfile Flex	
			Drawing N°: 223	
No.	Date	Scala: 1:1	DISEGNATORE/OPERATOR: MB	DATA/DATE: 03/12/2003