



LEDko EXT FullSpectrum with gobo rotator

KEY FEATURES

- LED profile spot IP 65
- RGBLA color mixing
- CCT proportional control from 2.700 to 6.500 K (CRI > 85)
- Dual gobo rotator included
- Profile zoom from 17° to 38° or from 10° to 25°
- Electronic 16 bit dimming with 3 selectable curves (Exponential, Logarithmic and Linear)
- Fan setting with 2 different options (auto, DMX)
- Guaranteed flicker-free
- Four blade framing system available as accessory



SPECIFICATIONS

- Red, Green, Blue, Lime, Amber color mixing with hue and saturation control
- CCT: all whites from 2.700 to 6.500 K
- Dual gobo rotator included (standard gobo size B)
- IP rating: 65 (weatherproof)
- Profile zoom from 17° to 38° or from 10° to 25°
- Electronic 16 bit dimming with 3 selectable curves (exponential, logarithmic, linear)
- Pulse electronic strobe
- Flicker-free operation with LEDs frequency controlled via DMX from 600 to 19.000 Hz
- Fan setting with 2 different options (auto, DMX)
- CE approved

LIGHT SOURCE

- RGBLA LEDs module (CRI > 85)
- Average LED lifetime: a minimum of 80% of the initial luminous flux will be maintained after approx. 50.000 hours of usage (50.000 LM80)

PHYSICAL SIZE (Profile zoom 17°/38°)

- Length: 687.8 mm (28.07 in)
- Width: 266 mm (10.47 in)
- Height: 185 mm (7.28 in)
- Height with bracket: 518.5 mm (20.41 in)
- Weight: 14 Kg (30.8 lbs)

PHYSICAL SIZE (Profile zoom 10°/25°)

- Length: 807.7 mm (31.8 in)
- Width: 266 mm (10.47 in)
- Height: 185 mm (7.28 in)
- Height with bracket: 518.5 mm (20.41 in)
- Weight: 15.5 Kg (34.2 lbs)

CONTROL PROTOCOL AND PROGRAMMING

- USITT DMX512A
- DMX channels: 19 / 10 / 4 / Studio mode / RGB mode
- Setting, addressing, testing and measurements via LEDs display
- RDM (Remote Device Management)



ELECTRICAL SPECIFICATIONS AND CONNECTIONS

- AC power: 80-264 V, auto-sensing, 50/60 Hz
- Internal cable without power plug
- Max power consumption: 285 W
- Power consumption: 1.26 A at 230 V, 2.53 A at 115 V - cosφ 0.98
- DMX data in/out: 5 pin locking XLR



ACCESSORIES

- Frost holder
- Customized gobos
- Four blade framing system, this accessory can be installed instead of the dual gobo rotator

DRAWING SIZE

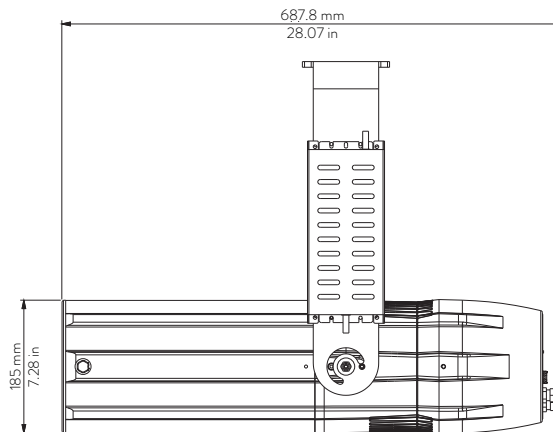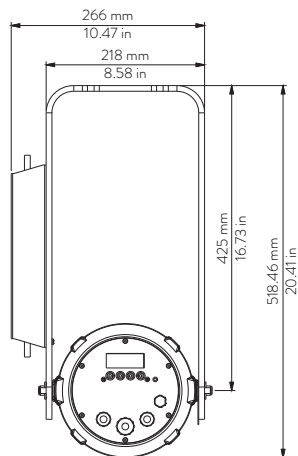

LEDko EXT with 14°-35° (T or D version) or 17°-38° Optic (FullSpectrum version)

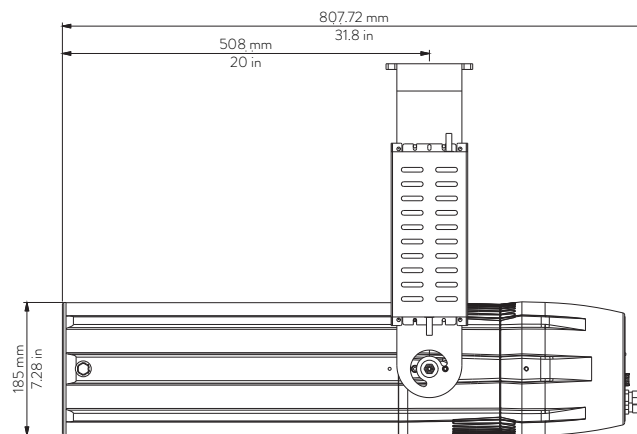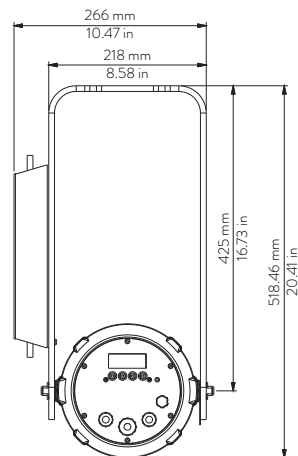

LEDko EXT with 10°-25° Optic

DMX CHARTS

19 channels	
1	master dimmer
2	red
3	green
4	blue
5	spare channel
6	lime
7	amber
8	strobe effect
9	dimmer fine
10	special function
11	red tone
12	green tone
13	blue tone
14	white tone
15	green saturation
16	saturation
17	gobo rotation speed
18	gobo 1 speed
19	gobo 2 speed

10 channels	
1	master dimmer
2	red
3	green
4	blue
5	spare channel
6	lime
7	amber
8	gobo rotation speed
9	gobo 1 speed
10	gobo 2 speed

Studio mode	
1	master dimmer
2	white tone
3	green saturation
4	saturation
5	hue
6	dimmer fine
7	special function
8	gobo rotation speed
9	gobo 1 speed
10	gobo 2 speed

RGB mode	
1	master dimmer
2	dimmer fine
3	red
4	green
5	blue
6	white tone
7	saturation
8	strobe effect
9	special function
10	gobo rotation speed
11	gobo 1 speed
12	gobo 2 speed

4 channels	
1	master dimmer (color temperature settable by display)
2	gobo rotation speed
3	gobo 1 speed
4	gobo 2 speed