



RigaLed Power 3200 K

Product code: RigaLed Power 20 - F004E002F / RigaLed Power 40 - F004E004F



KEY FEATURES

- Cosmetic design for high-end installations
- Thick aluminium, long lasting light source in long lasting body
- Variable light projection angle to adapt the application
- No fan, no maintenance, no noise

SPECIFICATIONS

- Fixed white color temperature at 3200 K
- Standard elliptical lens 13°x 40°
- Silver die-cast aluminium body
- Orientable yokes
- IP rating: 20

LIGHT SOURCE

- RigaLed Power 20 or 40 LEDs Cree
- LEDs life: 20.000 hours at 70% lumen intensity maintenance

PHYSICAL SIZE

- Length RigaLed Power 20: 500 mm (19.69 in)
- Length RigaLed Power 40: 995 mm (39.17 in)
- Width: 40 mm (1.56 in)
- Height: 72 mm (2.81 in)
- Weight RigaLed Power 20: 0.9 Kg (1.98 lbs)
- Weight RigaLed Power 40: 1.7 Kg (3.74 lbs)

CONTROL PROTOCOL AND PROGRAMMING

- With RegoBox or Concept Design
- Remote Device Management (RDM)


ELECTRICAL SPECIFICATIONS AND CONNECTIONS

- DC constant current power supply: 350 mA
- Power consumption RigaLed Power 20: 21.6 W
- Power consumption RigaLed Power 40: 43.2 W
- RJ45 connector

ACCESSORIES

- 12° lens kit
- 30° lens kit
- 50° lens kit

DRAWING SIZE - RigaLed Power 20

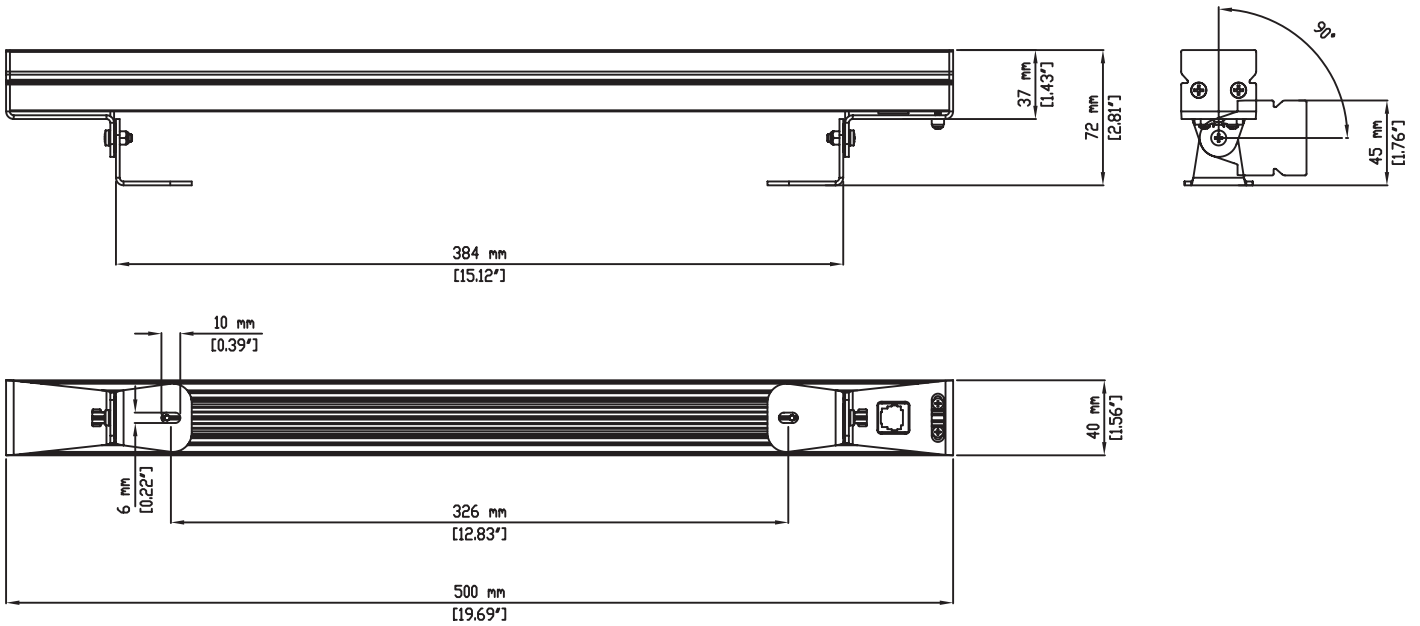

DRAWING SIZE - RigaLed Power 40

