


Distance (m.)	1	2	3	4	5	6	7	8	9	10
Luminous emittance (Lux)	2537	634	282	159	101	70	52	40	31	25
1/2 peak angle \varnothing (m.)	1.27	2.55	3.82	5.10	6.37	7.64	8.92	10.19	11.47	12.74
1/10 peak angle \varnothing (m.)	2.91	5.82	8.73	11.64	14.55	17.46	20.37	23.28	26.19	29.10



1/2 peak angle: 65°

1/10 peak angle: 111°

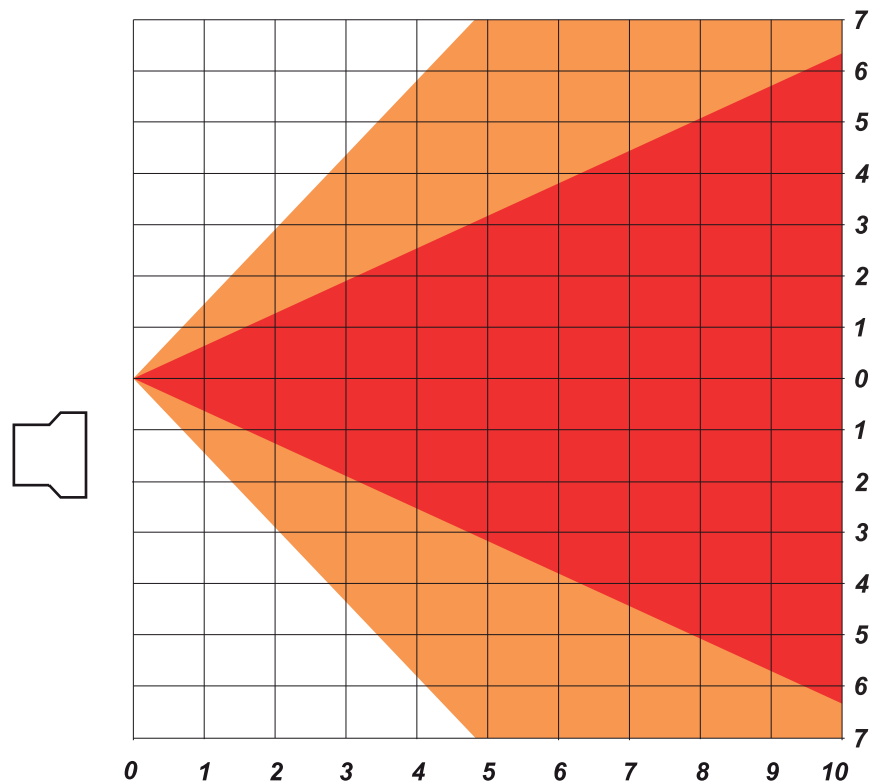

Via Carpenedolo, 90 - 46043 - Castiglione delle Stiviere (Mantova) Italy
 Ph. +39 0376 1514412 - Fax. +39 0376 1514380
 info@coemar.com

Duplication of this drawing, either full or in part, is strictly prohibited without prior written authorization from coemar.
 Questo disegno non può essere copiato, riprodotto, mostrato a terzi senza nostra autorizzazione

Prodotto/Product:
 SoftLite LED 3200 K

Date : 26/05/2016

Ver. N° 1.0