


Narrow


Distance (m.)	5	10	15	20	25	30	35	40	45	50
Luminous emittance (Lux)	133920	33480	14880	8370	5357	3720	2733	2093	1653	1339
Ø m.	0,70	1,40	2,10	2,80	3,50	4,20	4,89	5,59	6,29	6,99

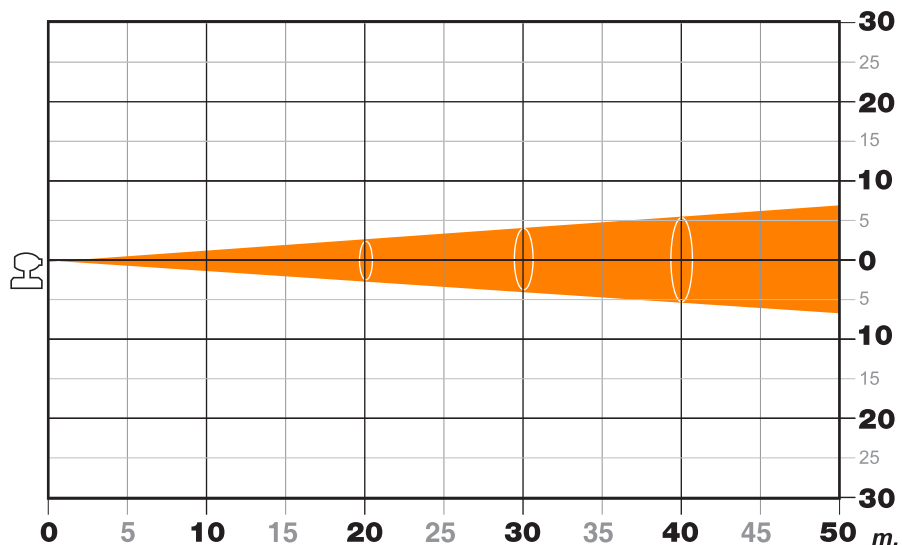

Angle: 8° *

Wide

Distance (m.)	2,5	5	7,5	10	12,5	15	17,5	20	22,5	25
Luminous emittance(Lux)	18400	4600	2044	1150	736	511	376	288	227	184
Ø m.	2,28	4,56	6,84	9,11	11,39	13,67	15,95	18,23	20,51	22,79

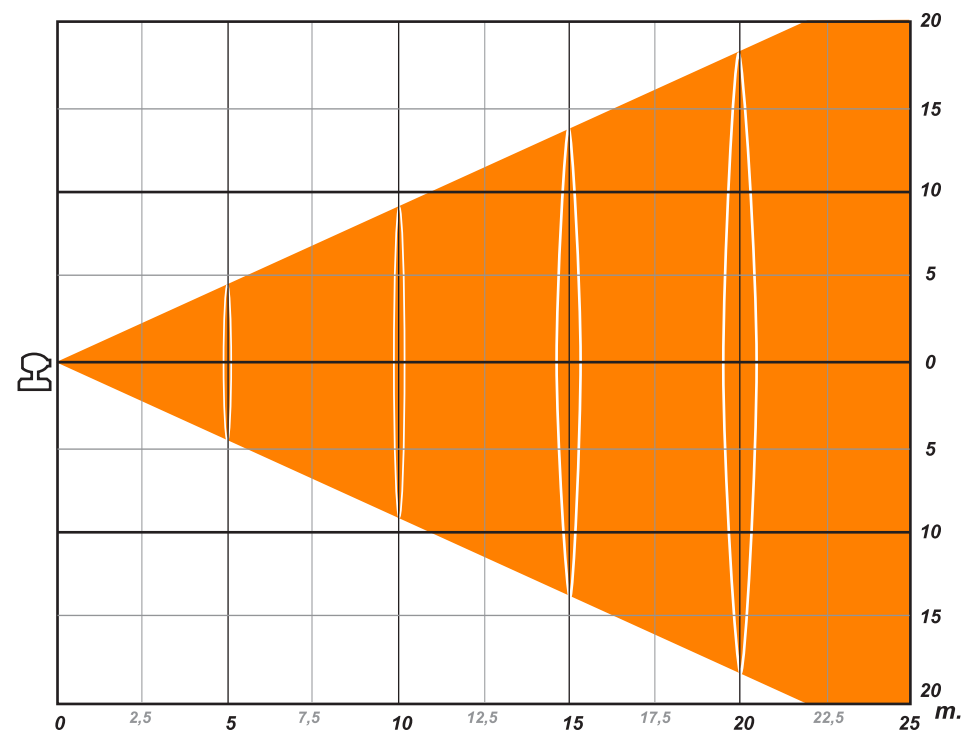

Angle: 49° *

* Measured at open beam.
Different beam angles
will be measured with gobos,
iris and defocused beam.



via Inghilterra 2/A - 46042 Castel Goffredo (Mantova) Italy
ph. +39 0376 77521 - fax +39 0376 780657
info@coemar.com

Duplication of this drawing, either full or in part, is strictly
prohibited without prior written authorization from coemar.
Questo disegno non può essere copiato, riprodotto,
mostrato a terzi senza nostra autorizzazione

Prodotto/Product:
Infinity Spot XL

Lampada/Lamp Philips MSR GOLD 1500 fast fit

Date : 22/07/09

Ver. N° 1.0