


Distance (m.)	3	6	9	12	15	18	21	24	27	30
Luminous emittance (Lux)	25000	6250	2778	1563	1000	694	510	391	309	250
1/2 peak angle ϕ m.	0.21	0.42	0.63	0.84	1.05	1.26	1.47	1.68	1.89	2.10
1/10 peak angle ϕ m.	0.42	0.84	1.26	1.68	2.10	2.52	2.94	3.36	3.78	4.20

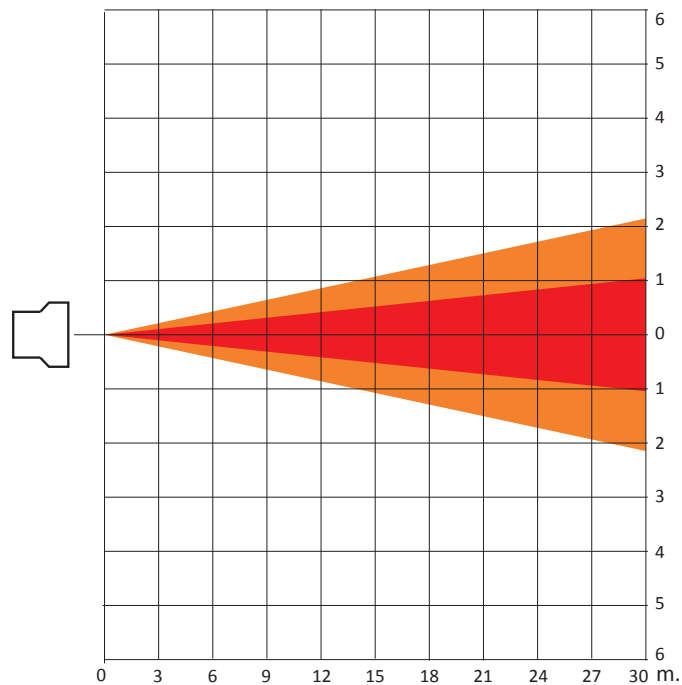

1/2 peak angle: 4°

1/10 peak angle: 8°

coemar
 Castiglione delle Stiviere (MN) - Italia
 Via Carpenedolo, 90
 Tel. 0376/1514412 Fax. 0376/1514380
 www.coemar.com

**Duplication of this drawing, either full or in part, is strictly prohibited without prior written authorization from coemar.
 Questo disegno non può essere copiato, riprodotto, mostrato a terzi senza nostra autorizzazione**

Prodotto/Product:
ParLite ACL

Light source

Tungsten

Date

18.05.2018

Ver. N°

1.0