


Par Lite Led Strobe

Distance (m.)	1	2	3	4	5	6	7	8	9	10
Luminous intensity (Lux)	1278	320	142	80	51	36	26	20	16	13
1/2 peak angle θ (m)	1,27	2,25	3,82	5,10	6,37	7,64	8,92	10,19	11,47	12,74
1/10 peak angle θ (m)	2,68	5,71	8,57	11,43	14,28	17,14	19,99	22,85	25,7	28,56

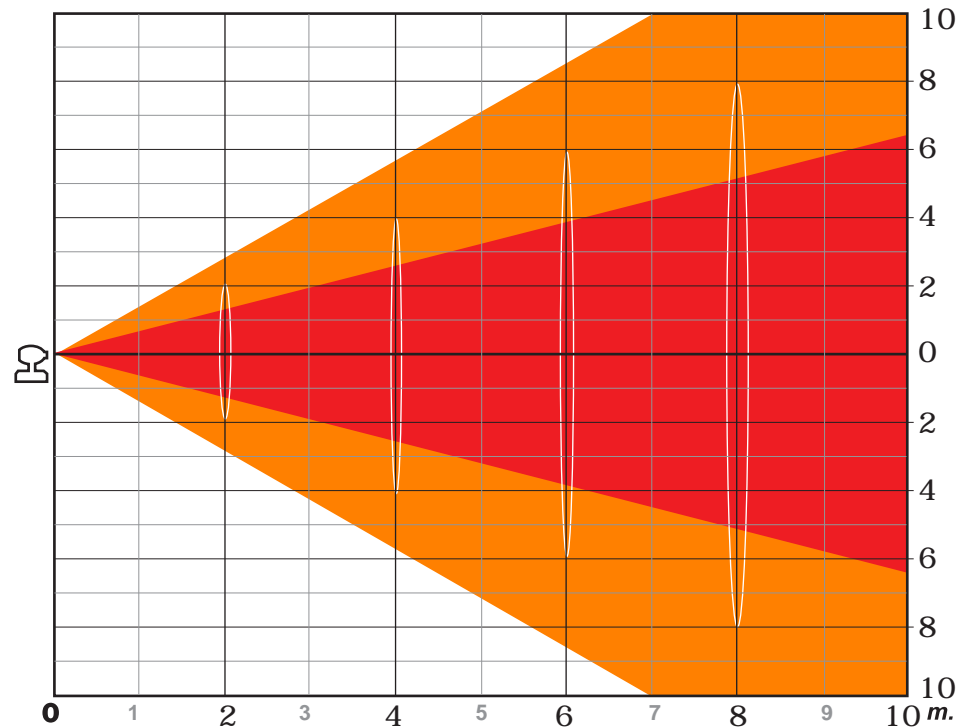

1/2 peak angle: 65°

1/10 peak angle: 170°



via Inghilterra 2/A - 46042 Castel Goffredo (Mantova) Italy
 ph. +39 0376 1514397-fax +39 0376 1514380
 info@coemar.com

Duplication of this drawing, either full or in part, is strictly prohibited without prior written authorization from coemar.
 Questo disegno non può essere copiato, riprodotto, mostrato a terzi senza nostra autorizzazione

Prodotto/Product:

Par Lite Led Strobe

Led 5630

Date : 12/06/2014

Ver. N° 1.0

