

ParLite LED ACL T

Product code:
F071E000R

Last update:
14/02/2024



ParLite LED ACL T with frontal support accessories holder

Introducing










● ParLite led available both in indoor **IP20** and in **IP65** outdoor version with a ultra narrow beam (3° lenses) , **fanless** (for silent operation) is suitable for entertainment lighting (theaters, television studios, events) and suitable for architectural illumination (shopping center, conference room, buildings, monuments, etc).

Long-lasting **aluminum compact body**, high quality LEDs and lenses guarantee long life and high lighting performance with low power consumption. The wide range of color temperatures or colors, colors rendering **(CRI) 80+ or 90+**, different fixing options and the numerous accessories available, make this projector suitable for any customer need.






ParLite Led is available in two different mounting options to fit any installation:

- **ParLite LED Portable:** double yoke for easy ground standing or truss hanging; 1.8m power cable with Bare Ends and DMX in/thru chassis-mount XLR5 connectors.
- **ParLite LED Track Mount:** eutrac 3-circuit + data and a single cable between fixture and track adapter for power and DMX.

Key Features

	● 12 LEDs Cree Tungsten
	● CRI> 80 or CRI> 90
	● CCT Fixed white 3.200 K
	● IP20 or 65
	● Fanless (for silent operation)
	● Ultra narrow beam (3° lenses)
	● Compact lighting fixture with aluminum body
	● Custom color on request (optional)
	● Manual (standard) or Pole Operated Pan-Tilt (Optional) ● Double yoke for easy ground standing or truss hanging ● Portable or Track mount version

General	
● LED Source	12 LEDs Cree Tungsten
● CCT Range	● ● ● ● ● Fixed white 3.200 K
● Color Rendering Index	CRI> 80 or CRI> 90
● Dimming	Smooth 100% to 0%, 5 Selectable Curves - Exponential, Logarithmic, Linear, Halo and Standard
● Strobe	Electronic strobe, synchronized, random, pulse effect
● Lens	3° beam angle
● Camera flicker control/Hz range	Flicker-free operation with LEDs frequency controlled via DMX from 600 to 20.000 Hz
● Calibrated Cob	Yes
● L80 Rating (hours to 80% output)	50.000 Hours
Electrical	
● Voltage Input	100-250 V, 50/60 Hz, auto-sensing
● Power Consumption	45 W maximum - 0.22 A at 230V, 0.44 A at 115V - cosφ 0.9
● Power Connection	2 m (6.6 ft) integral cable without power plug
● Data Connection	In and Out DMX 5 pin locking XLR connectors
Thermal	
● Ambient Operating Temperature	-40°C - +40°C (-40°F - 104°F)
● Cooling	Convection cooled, no fans, ideal for broadcast and theatre installation
Control	
● Protocols	DMX-512, RDM (Remote Device Management), Wireless (optional By LumenRadio)
● RDM configuraton	Yes
● DMX Channels	5 / 1
● Display	Setting, addressing, testing and measurements via LEDs display
● Firmware upgrade	Through DMX with RDM Upgrade USB interface (code AC10011A001)
Physical	
● Mounting Options	Track mount, Double yoke for easy ground standing or truss hanging, PO Yoke (optional)
● Materials	Thick aluminum
● Weight	3.5 Kg / 7.72 lbs
● Length	211.4 mm / 8.32 in
● Height	267 mm / 10.51 in
● Width	182.8 mm / 7.20 in
● IP Rating	IP20 or 65 (weatherproof)
● Color options	Black or Silver (standard), custom color on request (optional)
General accessories	
BC10007A001	Support accessories holder black
BC10007A002	Support accessories holder silver
PCO9169	Frame For Internal Frost Filter
PCO9169/1	Frame For External Frost Filter (only IP20 version)
PCO9164/1	4 Leaf Barndoor (only IP20 version)
BC10007A007	Egg Crate Louvers (only IP20 version)
BC10007A009	PO Yoke (only IP20 version)
BC10007A012	Top hat (only IP20 version)
BC10007A011	Half top hat (only IP20 version)





BC10007A001 BC10007A002	Support accessories holder black Support accessories holder silver	
PCO9169	Frame For Internal Frost Filter	
PCO9169/1	Frame For External Frost Filter (only IP20 version)	
PCO9164/1	4 Leaf Barndoor (only IP20 version)	
BC10007A007	Egg Crate Louvers (only IP20 version)	

BC10007A009	PO Yoke (only IP20 version)	A black metal yoke with a blue connector on one end and a silver pin on the other.
BC10007A012	Top hat (only IP20 version)	A black, cylindrical, flared top hat accessory.
BC10007A011	Half top hat (only IP20 version)	A black, cylindrical, flared half top hat accessory.


DMX Charts

5 Channels	1 Channel
01 → Master Dimmer	01 → Master Dimmer
02 → Spare Channel	
03 → Dimmer Fine	
04 → Strobe Effect	
05 → Special Functions	


ParLite LED ACL Standard Version

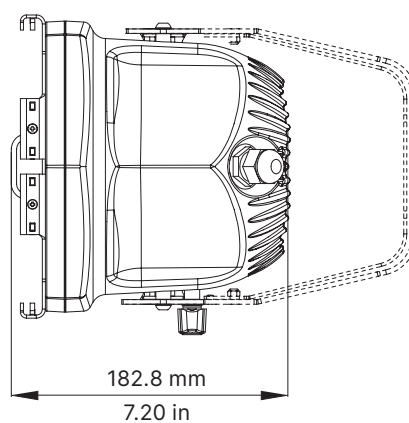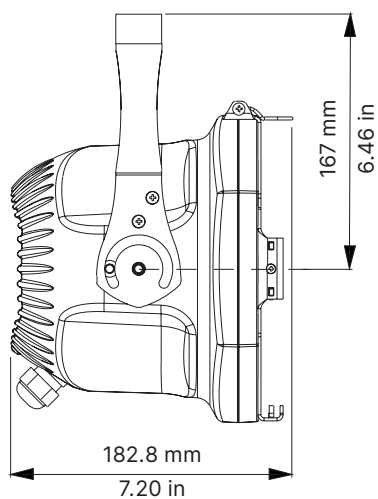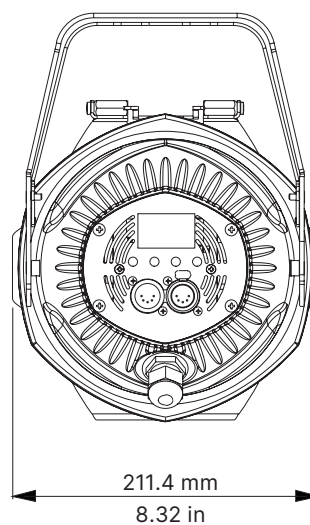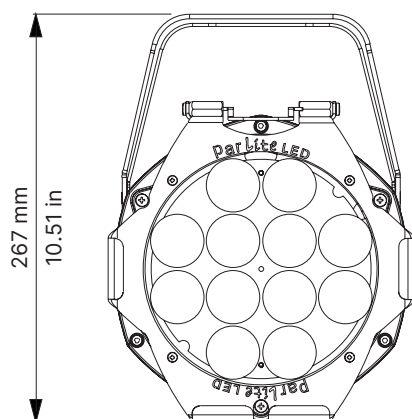

ParLite LED ACL Track Mount

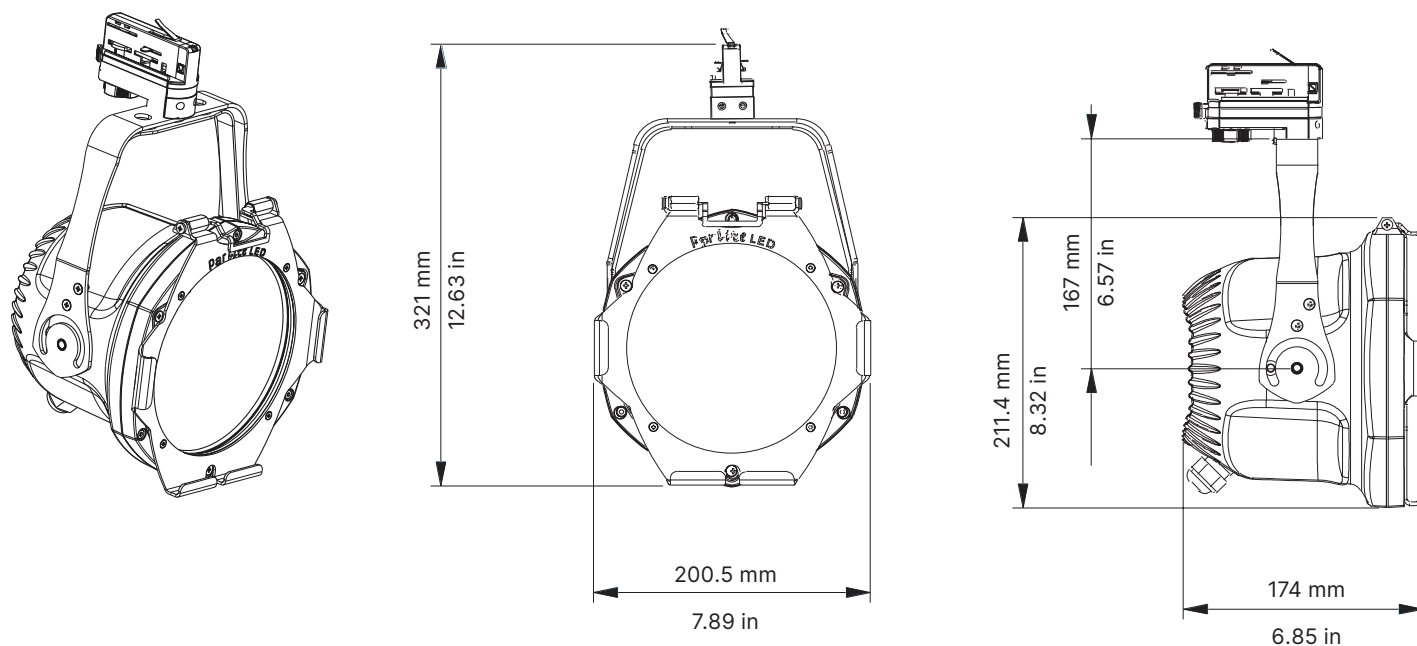


ParLite LED ACL Track Mount with 4-LEAF barndoor

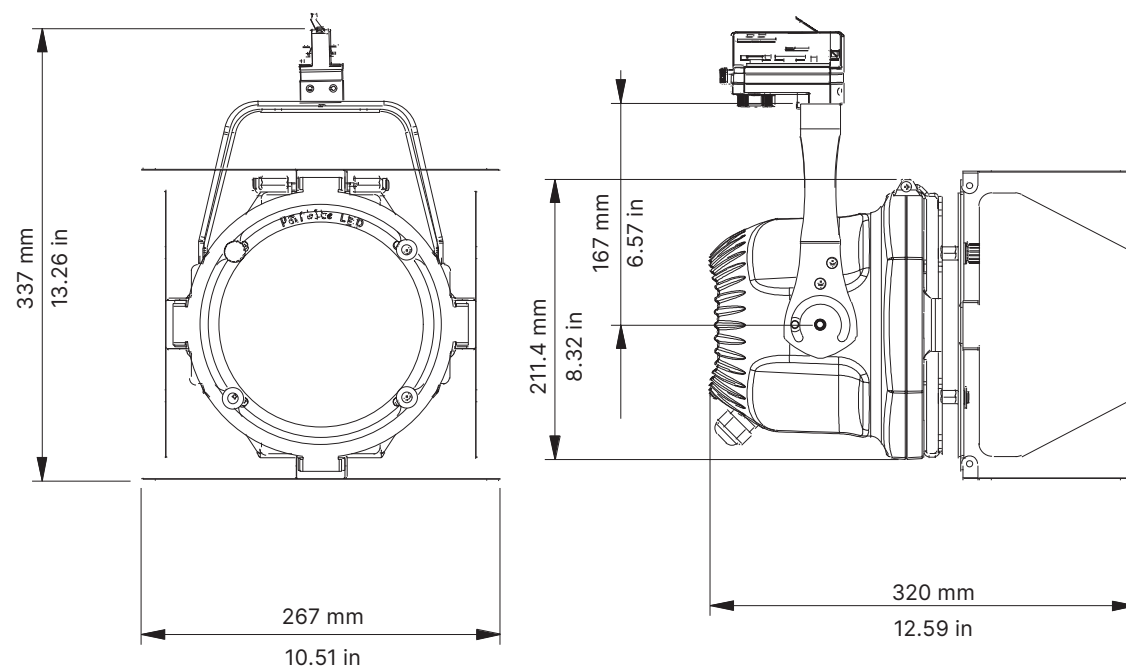

ParLite LED ACL Tungsten

Optic: 3° Lens

Distance(m)	5	10	15	20	25	30	35	40	45	50	
lux	3.200K	10.440	2.610	1.160	653	418	290	213	163	129	104
1/2 P.A. Ø (m)	0,26	0,52	0,79	1,05	1,31	1,57	1,83	2,09	2,36	2,62	
1/10 P.A. Ø (m)	0,59	1,17	1,76	2,34	2,93	3,51	4,10	4,68	5,27	5,85	
lux	3.200K	CRI 80									

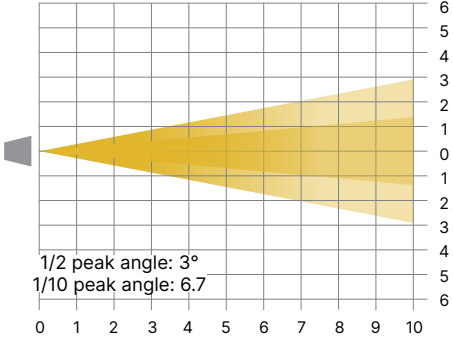

● Coemar Lighting S.r.l.

Via Carpenedolo, 90
46043, Castiglione delle Stiviere (MN) – Italy

P. +39 0376 1514412
M1. info@coemar.com
M2. service@coemar.com
W. coemar.com

P.iva – C.f. 02415330204

