



ParLite LED Strobe D

Product code:
PC10016A196

Last update:
28/03/2023



ParLite LED Strobe D

Introducing

● The perfect lightweight strobe ParLite Led with an aluminum body for a long lasting light source and with 7 LED rings individually controlled in which you can use strobe and wash mode. It can achieve a 120° beam angle. Perfect for broadcast segment thanks to the low noise fan. Cool design for hi-end installation thanks to its lightweight of 4.5 Kg.

Key Features



● 308 Seoul LEDs Daylight



● CCT Fixed White 5.600 K



● IP20 or 65



● 120° beam angle



● Internal/External gel frame (standard size)



● Thick aluminium, long lasting light source in long lasting body



● Custom color on request (optional)



● 7 Led rings individually controlled

General	
● LED Source	308 Seoul LEDs Daylight - 7 LED rings individually controlled
● CCT Range	●●●●● Fixed White 5.600 K
● Dimming	Electronic dimmer (2 curves selectable)
● Strobe	Synchronized, random or pulse electronic strobe
● Modes	Strobe and Wash modes (automatic LED intensity adjustment)
● Available Optics	120° beam angle
● Camera flicker control/Hz range	Guaranteed flicker-free operation with LEDs frequency controlled via DMX from 600 to 5.000 Hz
● Calibrated Cob	Yes
● L80 Rating (hours to 80% output)	50.000 Hours
Electrical	
● Voltage Input	90-250 V, 50-60 Hz, auto-sensing
● Power Consumption	0.7 A at 230 V, 1.5 A at 115 V
● Power Connection	2m (6.6 ft) integral cable without power plug
● Data Connection	In and Out DMX 5 pin locking XLR connectors
Thermal	
● Ambient Operating Temperature	-40°C - +40°C (-40°F - 104°F)
● Cooling	Convection cooled, no fans, ideal for broadcast and theatre installation
Control	
● Control Variants	USITT DMX512A, RDM (Remote Device Management), Wireless (optional By LumenRadio)
● RDM	DMX Setup, Fixture Status, RDM Commands
● DMX Channels	13 / 6 / 3
● Display	Setting, addressing, testing and measurements via LEDs display
Physical	
● Yoke	Manual (standard) or Pole Operated Pan-Tilt (optional)
● Materials	Thick aluminium, long lasting light source in long lasting body
● Framing System	Internal/External gel frame (standard size)
● Weight	4.5 Kg / 9.92 lbs
● Length	211 mm / 8.31 in
● Height	267 mm / 10.51 in
● Width	182 mm / 7.16 in
● IP Rating	IP20 or 65 (weatherproof)
● Color options	Black (standard), custom color on request (optional)
General Accessories	
BC10007A001	Support accessories holder black
BC10007A002	Support accessories holder silver
PCO9164	4 leaf barndoor
PCO9169	Frame for internal frost filter
PCO9169/1	Frame for external frost filter

13 Channels

- 01 → Master Dimmer
- 02 → Ring 1
- 03 → Ring 2
- 04 → Ring 3
- 05 → Ring 4
- 06 → Ring 5
- 07 → Ring 6
- 08 → Ring 7
- 09 → Frequency
- 10 → Duration
- 11 → Strobe Effect
- 12 → Games
- 13 → Games Speed


6 Channels

- 01 → Master Dimmer
- 02 → Frequency
- 03 → Duration
- 04 → Strobe Effect
- 05 → Games
- 06 → Game Speed

3 Channels

- 01 → Master Dimmer
- 02 → Frequency
- 03 → Duration

Drawing Size

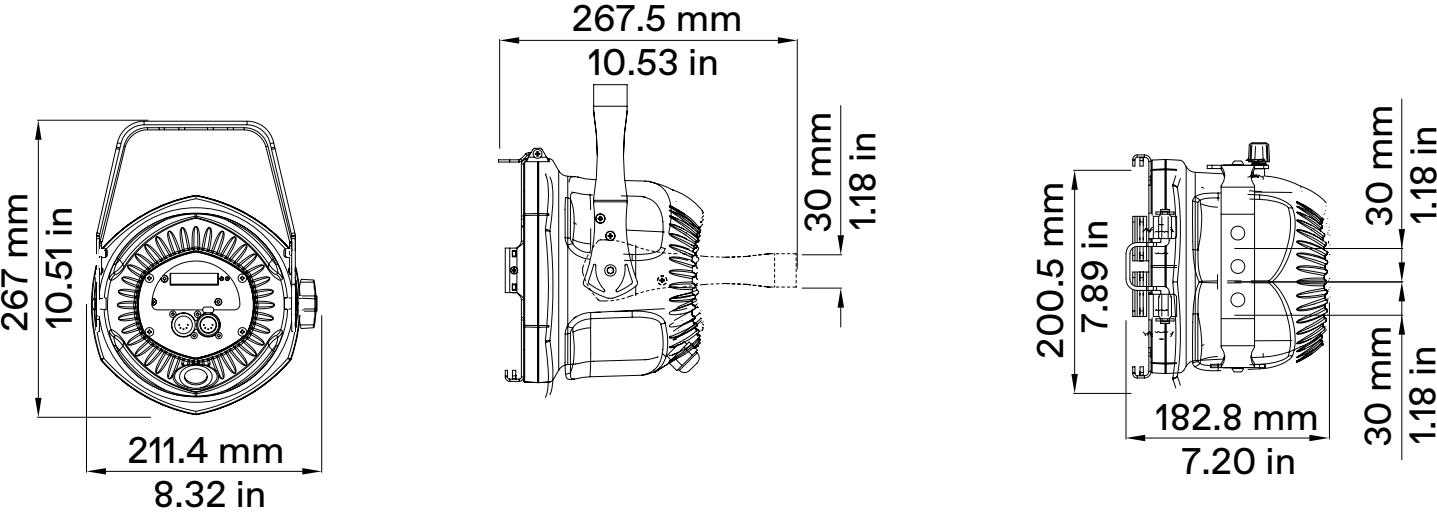

● Coemar Lighting S.r.l.

Via Carpenedolo, 90
46043, Castiglione delle Stiviere (MN) – Italy

P. +39 0376 1514412

M1. info@coemar.com

M2. service@coemar.com

W. coemar.com

P.iva – C.f. 02415330204

