


Distance (m.)	1	2	3	4	5	6	7	8	9	10
Luminous emittance (Lux)	16500	4125	1833	1031	660	458	337	258	204	165
1/2 peak angle Ø (m.)	0.06	0.13	0.20	0.27	0.34	0.41	0.48	0.55	0.62	0.69
1/10 peak angle Ø (m.)	0.08	0.17	0.26	0.34	0.43	0.52	0.61	0.69	0.78	0.87

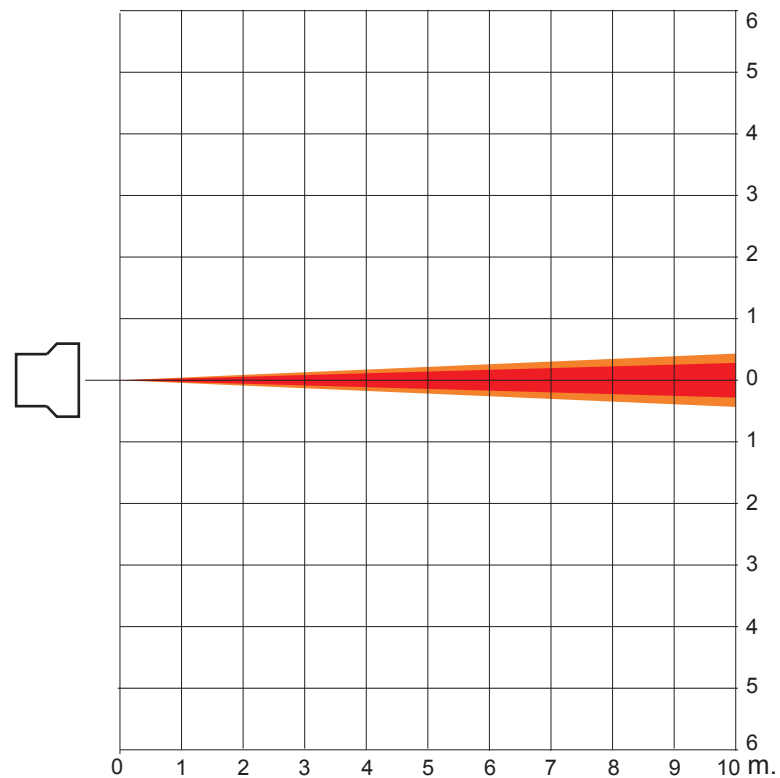

**1/2 peak angle: 4°**

**1/10 peak angle: 5°**

**coemar**  
 Castiglione delle Stiviere (MN) - Italia  
 Via Carpenedolo, 90  
 Tel. 0376/1514412 Fax. 0376/1514380  
 www.coemar.com

Duplication of this drawing, either full or in part, is strictly prohibited without prior written authorization from coemar.  
 Questo disegno non può essere copiato, riprodotto, mostrato a terzi senza nostra autorizzazione

Prodotto/Product:  
 PinSpot

Light source 5000K

Date 01.12.2017

Ver. N° 1.0