


100/115/208/230/240 v  
50/60 Hz  
(selectable)  
(selezionabile)

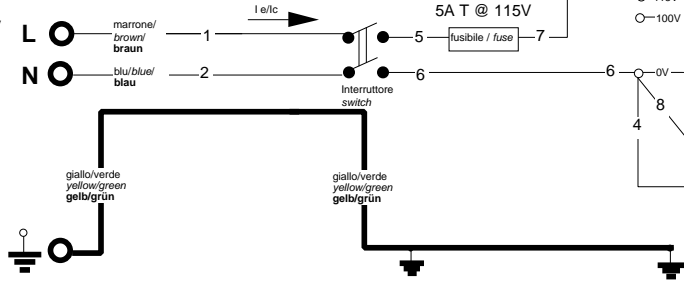

150W CDM-SA/T		
Ve (v)	Ie (A)	Ic (A)
240	1,1	1,4
230	1,2	1,5
208	1,3	1,6
115	2,2	3
100	2,6	3,6

150W CDM-SA/T	
Lamp Current	I <sub>l</sub> = 1,8 A
Lamp Voltage	V <sub>l</sub> = 96 V
Starting Voltage	V <sub>s</sub> = 3,5/5 KV
Phase angle	Cos φ = 0,9

Vedi tabella cavi per sezioni e modelli

		<b>coemar</b>		<small>CASTEL GOFFREDO (MN) ITALIA VIA INGHILTERRA ZONA IND. EST tel: (0376) 77521 fax: (0376) 780657 www.coemar.com</small>		<small>SCHEMA ELETTRICO / WIRING DIAGRAM FOR I Spot 150 Proiettore/fixture</small>	
						SCHEMA No: 200	
DISEGNATORE:		Descrizione		No. Data		DISEGNATORE: <i>Fabio Allegri</i> DATA: 16/05/2001	
				MODIFICHE		SOTTOSHEMA No: 1	