

Mini ReLite LED T/D

Last update:
19/04/2023



Mini ReLite LED T/D

Introducing

● If you want to switch your **TV studio or theatre from halogen to LED**, the ReLite Series is the perfect retrofit solution for you. Easy and quick upgrade, excellent white light quality, huge power savings with almost no heat generation and long life LED lamps are just some of the advantages offered by our ReLite Series. The Mini ReLite is a LED based lamp designed to retrofit 300 / 500 / 650 W traditional incandescent fixtures.

Key Features



- LED retrofit lamp
- Tungsten or Daylight COB LED



- CRI 90 or CRI 97



- CCT Fixed white 3.200 K or 5.600 K



- Linear dimming from 1% to 100%
- Full-range dimming on your existing AC dimmers



- Thermal protection



- Guaranteed flicker free



- Available Pin Connectors: GX9.5 – GY9.5 – G22



- European Conformity certification

General

● LED Source	Tungsten or Daylight COB LED
● CCT Range	● ● ● ● ● Fixed white 3.200 K or 5.600 K
● Color Rendition Average	CRI 90 or CRI 97
● Dimming	Linear dimming from 1% to 100%: the stability of the fixture is guaranteed starting from 30/35 % of the dimmer channel (depending on the installation conditions) Dimmable from traditional existing TRIAC AC or IGBT dimmers
● Camera flicker control/Hz range	Flicker-free operation (dimming with constant current)
● L80 Rating (hours to 80% output)	50.000 Hours
● Compatibility	Fast retrofitting on products like Arri, De Sisti, ADB and more

Electrical

● Voltage Input	90-240 V, 50/60 Hz, auto-sensing
● Power Consumption	70 W Maximum - 0.31 A at 230 V, 0.65 at 110 V – cosφ 0.98


Thermal

● Thermal protection	Yes
● Ambient Operating Temperature	0°C - +40°C (32°F - 104°F)

Physical

● Pin Connection	GX9.5 – GY9.5 – G22
● Materials	Aluminium and technopolymers
● Weight	0.3 Kg / 0.66 lbs
● Length	73.7 mm / 2.90 in
● Height	77 mm / 3.03 in - With connectors: 96 mm / 3.78 in
● Width	76.5 mm / 3.01 in
● IP Rating	IP20
● Color options	Black (standard)

Mini ReLite LED with GY9.5

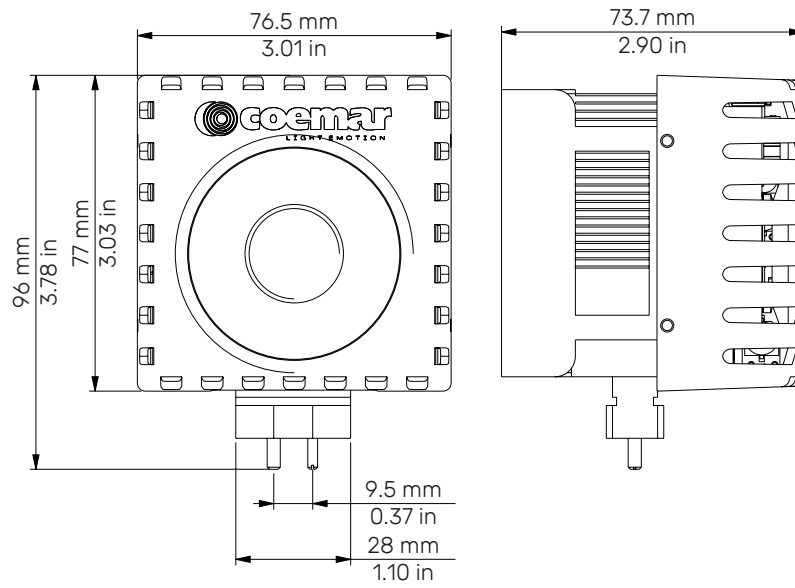

Ordering informations

Product	Code
Mini ReLite T Studio with G22	F040A040A
Mini ReLite T Studio with GY9.5	F040A070A
Mini ReLite D Studio with G22	F040B040A
Mini ReLite D Studio with GY9.5	F040B070A
Mini ReLite D Studio with GX9.5	F040B050A
Mini ReLite T with G22	F040C040A
Mini ReLite T with GX9.5	F040C050A
Mini ReLite T with GY9.5	F040C070A
Mini ReLite D with G22	F040D040A
Mini ReLite D with GX9.5	F040D050A
Mini ReLite D with GY9.5	F040D070A

● Coemar Lighting S.r.l.

Via Carpenedolo, 90
46043, Castiglione delle Stiviere (MN) – Italy

P. +39 0376 1514412
M1. info@coemar.com
M2. service@coemar.com
W. coemar.com

P.iva – C.f. 02415330204

