

RELITE LED HD DAYLIGHT CRI 97

(INSTALLED ON ARRI 2000W)

TM30 TEST REPORT


TM30 TEST REPORT FLOOD ANGLE

Information


User :	Measure Time :09:24:47	
Model NO.: MK350S PREMIUM	Light Source :Relite Led HD	





Spectrum

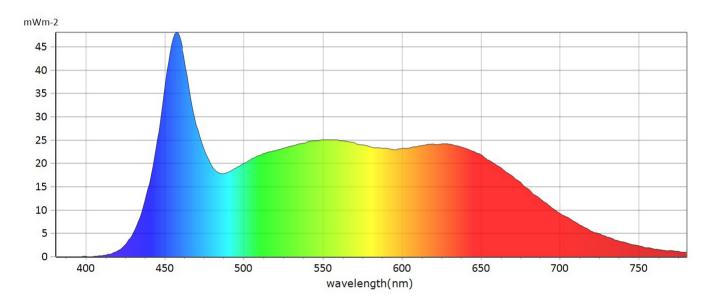

■ General Color Rendition







TM30 TEST REPORT FLOOD ANGLE

Information

User :	Measure Time :09:24:47
Model NO. : MK350S PREMIUM	Light Source :Relite Led HD


Rf 91,2


Fidelity index Rf

Rg 99,8

Gammut index Rg


Color Rendition by Hue





		Graphic shifts (%)	
Hue Bin	Rf	Chroma	Hue
1	91,6	-0,9%	1,6%
2	94,4	0,2%	1,7%
3	93,7	-0,1%	0,5%
4	91,5	-2,2%	-0,6%
5	89,7	-4,9%	-1,2%
6	95,4	-1,9%	0,0%
7	91,9	-3,9%	2,3%
8	87,3	-2,7%	5,7%
9	85,9	-1,9%	11,5%
10	82,2	0,9%	10,3%
11	83,2	4,2%	8,5%
12	95,0	2,7%	1,3%
13	93,3	3,8%	-0,6%
14	94,3	0,9%	-1,0%
15	83,8	8,6%	-7,7%
16	94,9	-1,1%	1,2%

■ Color Fidelity by Sample

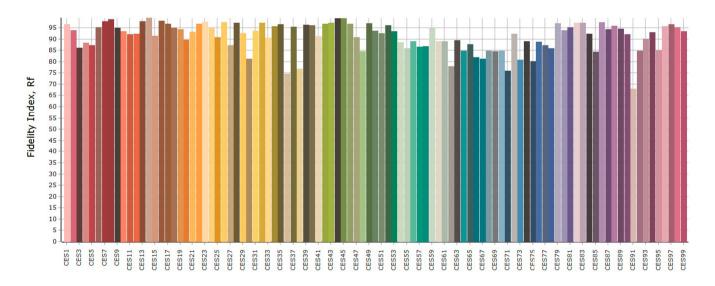


TM30 TEST REPORT MEDIUM ANGLE

Information


User:	Measure Time :09:25:29	
Model NO.: MK350S PREMIUM	Light Source :Relite Led HD	
	——————————————————————————————————————	





Spectrum

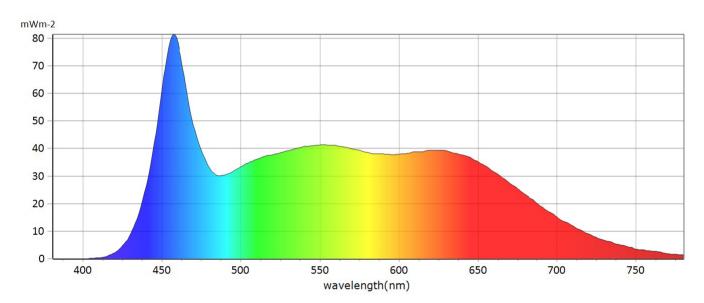

■ General Color Rendition







TM30 TEST REPORT MEDIUM ANGLE

Information

User:	Measure Time :09:25:29	
Model NO. : MK350S PREMIUM	Light Source :Relite Led HD	


Rf 91,0


Fidelity index Rf

Rg 99,6

Gammut index Rg


Color Rendition by Hue





		Graphic shifts (%	
Hue Bin	Rf	Chroma	Hue
1	91,2	-0,8%	1,8%
2	94,2	0,3%	1,7%
3	93,7	0,0%	0,2%
4	91,3	-2,3%	-1,0%
5	88,6	-5,1%	-1,1%
6	95,2	-2,5%	-0,1%
7	91,4	-4,2%	2,5%
8	86,7	-2,7%	6,1%
9	85,4	-1,8%	11,7%
10	81,8	1,0%	10,5%
11	83,1	4,3%	8,5%
12	95,1	2,7%	1,1%
13	93,0	3,7%	-0,8%
14	94,3	0,7%	-1,0%
15	83,5	8,8%	-7,8%
16	94,6	-1,1%	1,5%

■ Color Fidelity by Sample

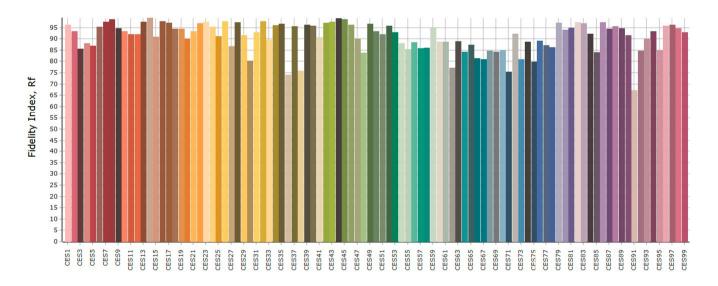


TM30 TEST REPORT SPOT ANGLE

Information


Measure Time :09:22:36
Light Source :Relite Led HD





Spectrum

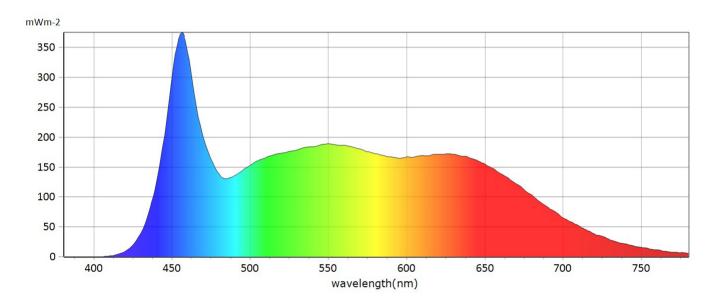

■ General Color Rendition







TM30 TEST REPORT SPOT ANGLE

Information

Measure Time :09:22:36	
Light Source :Relite Led HD	


Rf 91,2


Fidelity index Rf

Rg 99,8

Gammut index Rg

Color Rendition by Hue





		Graphic shifts (9	
Hue Bin Rf	Chroma	Hue	
1	91,9	-1,0%	1,3%
2	94,9	-0,1%	1,5%
3	93,5	-0,3%	0,8%
4	91,3	-2,2%	-0,3%
5	88,7	-4,5%	-0,4%
6	94,5	-2,7%	0,3%
7	94,7	-2,9%	0,8%
8	88,1	-3,0%	5,2%
9	86,1	-2,5%	10,9%
10	81,7	0,4%	10,6%
11	81,9	3,9%	9,5%
12	94,3	2,6%	2,2%
13	93,3	4,2%	0,0%
14	94,1	1,3%	-1,0%
15	83,2	9,5%	-8,2%
16	95,5	-0,9%	0,6%

Color Fidelity by Sample

