


## Mini LEDko Fresnel Fixed White, CRI 97, TLCI 98

Optic: Fresnel Zoom 10° - 100°


### Zoom: Spot

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emittance (lux)	<b>3.000K</b>	14.052	3.513	1.561	878	562	390	287	220	173	141
	<b>5.600K</b>	16.300	4.075	1.811	1019	652	453	333	255	201	163
<b>1/2 P.A. ø (m)</b>	0.16	0.31	0.47	0.63	0.79	0.94	1.10	1.26	1.42	1.57	
<b>1/10 P.A. ø (m)</b>	0.32	0.63	0.95	1.27	1.58	1.90	2.22	2.53	2.85	3.17	

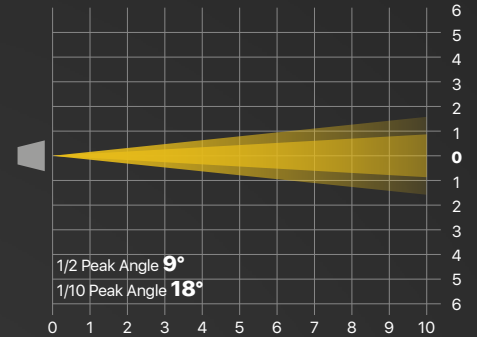


### Zoom: Medium

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emittance (lux)	<b>3.000K</b>	2.760	690	307	173	110	77	56	43	34	28
	<b>5.600K</b>	3.200	800	356	200	128	89	65	50	40	32
<b>1/2 P.A. ø (m)</b>	0.57	1.15	1.72	2.29	2.87	3.44	4.01	4.59	5.16	5.73	
<b>1/10 P.A. ø (m)</b>	0.79	1.58	2.36	3.15	3.94	4.76	5.51	6.30	7.09	7.88	

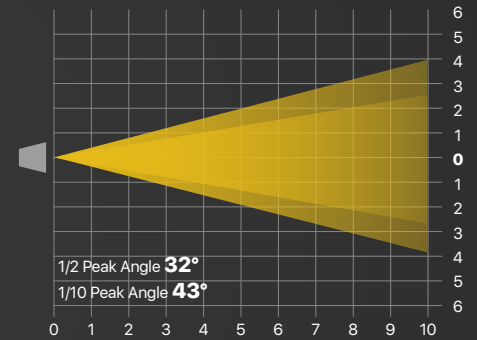

### Zoom: Flood

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emittance (lux)	<b>3.000K</b>	772	193	86	48	31	21	16	12	10	8
	<b>5.600K</b>	860	215	96	54	34	24	18	13	11	9
<b>1/2 P.A. ø (m)</b>	1.23	2.45	3.68	4.90	6.13	7.35	8.58	9.80	11.03	12.26	
<b>1/10 P.A. ø (m)</b>	2.38	4.77	7.15	9.53	11.92	14.30	16.68	19.07	21.45	23.84	

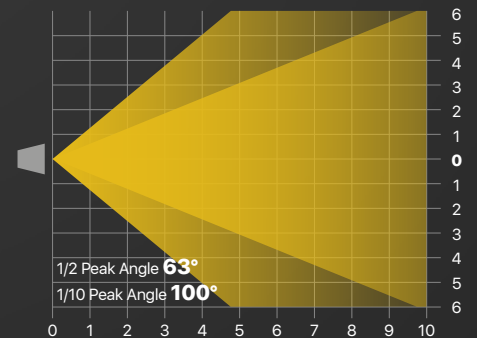


PHOTOMETRICAL DATA

Mini LEDko Fresnel VariWhite, CRI 95, TLCI 96

Optic: Fresnel Zoom 10° - 100°


Zoom: Spot

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emitance (lux)	<b>3.200K</b>	6.960	1.740	773	435	278	193	142	109	86	70
	<b>5.000K</b>	8.444	2.111	938	528	338	235	172	132	104	84
<b>1/2 P.A. ø (m)</b>	0.16	0.31	0.47	0.63	0.79	0.94	1.10	1.26	1.42	1.57	
<b>1/10 P.A. ø (m)</b>	0.32	0.63	0.95	1.27	1.58	1.90	2.22	2.53	2.85	3.17	

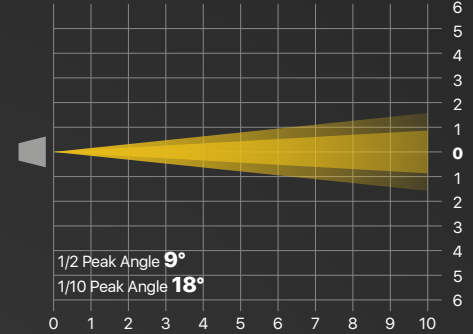

Zoom: Medium

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emitance (lux)	<b>3.200K</b>	1.408	352	156	88	56	39	29	22	17	14
	<b>5.000K</b>	1.572	393	175	98	63	44	32	25	19	16
<b>1/2 P.A. ø (m)</b>	0.83	1.66	2.49	3.31	4.14	4.97	5.80	6.63	7.46	8.28	
<b>1/10 P.A. ø (m)</b>	1.11	2.22	3.33	4.43	5.54	6.65	7.76	8.87	9.98	11.09	

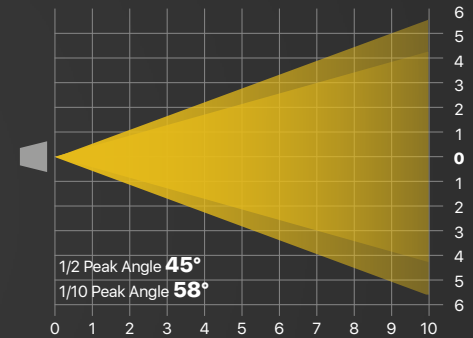

Zoom: Flood

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emitance (lux)	<b>3.200K</b>	564	141	63	35	23	16	12	9	7	6
	<b>5.000K</b>	604	151	67	38	24	17	12	9	7	6
<b>1/2 P.A. ø (m)</b>	1.23	2.45	3.68	4.90	6.13	7.35	8.58	9.80	11.03	12.26	
<b>1/10 P.A. ø (m)</b>	2.38	4.77	7.15	9.53	11.92	14.30	16.68	19.07	21.45	23.84	

