

# Mini Ledko

FRESNEL



## Mini Ledko

We took our flagship product and made it smaller. Much smaller. We are proud to introduce you to the new Coemar product family, Mini LEDko.

Thanks to Mini LEDko we can expand our offer and make available all the quality we offer with LEDko, in a much smaller body.

High power is not always necessary and this is why Mini LEDko was born. Anyone who needs a profiler with an incredible light emitted/power ratio must have our brand new Mini LEDko. We have thought of everything, from optics to mounting options, to communication protocols, to ensure that anyone can find the perfect product for their needs.

## CONFIGURATION

Mini LEDko are available in three different mounting options to fit any installation:

1. PORTABLE
2. CANOPY
3. TRACK

## MAIN FEATURES



25W White COB LED ( T/D version)  
35W COB LED ( VW version)



High CRI >95



CCT available: 2.700 K, 3.000 K, 4.000 K, 5.600 K  
or Tunable white from 2700K to 5000K



High lumen flux and flat field



Proportional Zoom 9°-100°



Full Body in Aluminum



RAL 9005 (black standard)




RAL custom (colour on demand)



Track / hanging / ceiling installation



European Conformity certification

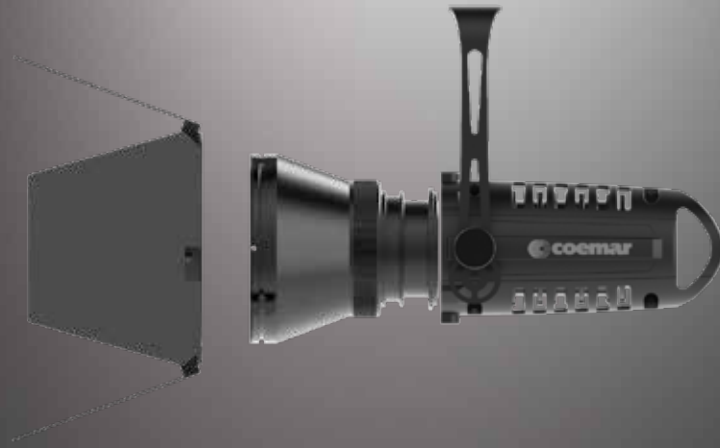

[ Fresnel ]

Family	Version	Optic	Barrel	Accessories	Mounting	Controls
Mini LEDko	Fresnel	Zoom 9°-100°	Integrated Barrel	4 Leaf Barndoor Color Frame Holder  Honeycomb 4mm    Honeycomb 6mm  	For All Versions:  C-Clamp Track Canopy	For All Versions:  DMX512 DALI On - Off On Board Potentiometer Bluetooth App

## TECHNICAL DATA

Version: **Mini LEDko Profile Fixed White**

### General

<b>LED Source</b>	25W White COB LED ( T/D version), 35W COB LED ( VW version)
<b>CCT Range</b>	3.000K, 5.600K (On request available 2.700K, 3.500K, 4.000K, 5.000K, 6.500K) 2.700K to 5.000K ( VariWhite Version)
<b>Color Rendition Average</b>	CRI >95 TLCI >95
<b>Proportional Zoom</b>	9°-100°
<b>L80 Rating</b> (hours to 80% output)	50.000 Hours

### Electrical

<b>Voltage Input</b>	220-240V, 50/60 Hz (on request available other voltage range)
<b>Power Consumption</b>	20 W typical - 0.07 A at 230 V, 0.15 A at 115 V - cosφ: 0.9
<b>Power Connection</b>	Integrated cable without power plug

### Thermal

<b>Ambient Operating Temperature</b>	0°C - +40°C (32°F - 104°F)
<b>Cooling</b>	Passive cooling and fan-free

### Control


<b>Control Variants</b>	On/Off, On board potentiometer, Dali, Bluetooth App , Dmx ( soon available), Wireless (optional)
<b>RDM</b>	DMX Setup, Fixture Status, RDM Commands (only DMX version)
<b>Accessories</b>	4 Leaf Barndoor, Honey-Comb, Color Frame Holder

### Physical


<b>Mounting Options</b>	Track, Portable C-Clamp, Canopy
<b>Materials</b>	Die-cast aluminium construction (EN AB-46100 grade)
<b>Fine Texture</b>	High temperature powder-coated paint
<b>Aluminium Yoke</b>	With 11mm diameter mounting hole
<b>Tool-free</b>	Tilt and beam adjustment
<b>High-impact Resistant</b>	Thermally insulated knobs and shutter handles
<b>Weight</b>	1.5 Kg / 3.3 lbs
<b>Lenght</b>	Body: 135 mm / 5.3 in
<b>IP Rating</b>	IP20

## DRAWING SIZE

### Track

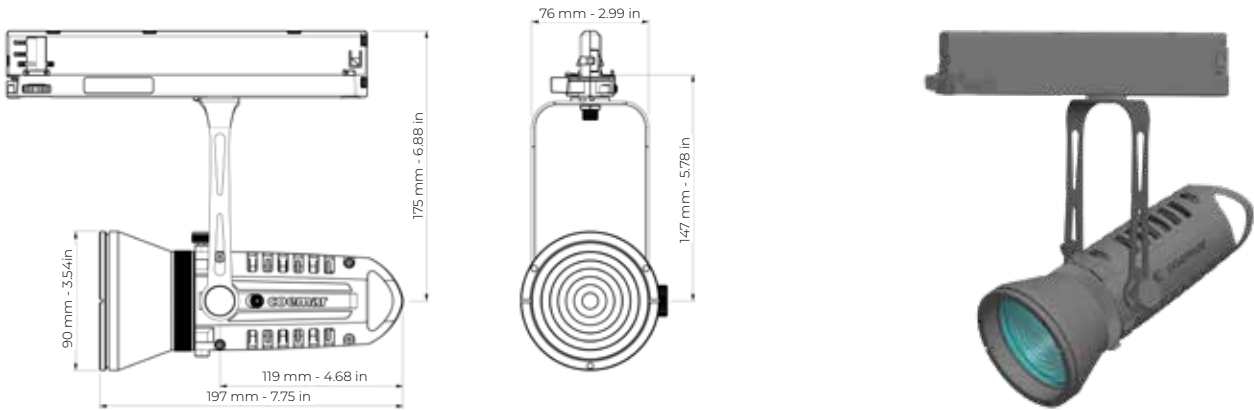

### Canopy

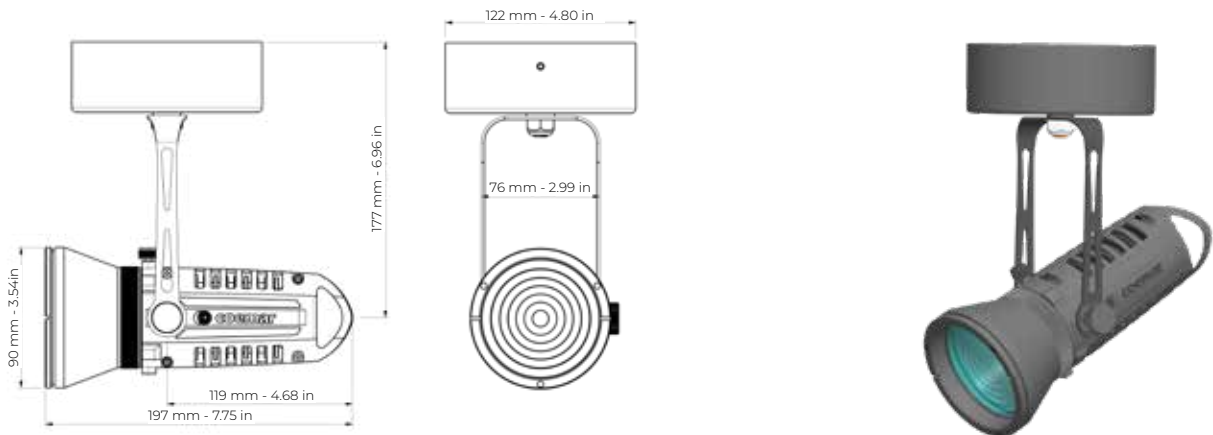

### Portable

