

LEDko VariWhite HD +

Product code:
F112G000A

Last update:
18/05/2023



LEDko VariWhite HD +
with Profile Zoom 28°-40° Optic

LEDko VariWhite HD + with Profile Zoom 28°-40° Optic

Introducing

● Designed with HD electronic and a new OLED display, this spot profile projector is the evolution of the VariWhite Series 2 LEDko and the normal HD. The HD + electronic with advanced LED controller enables a smooth dimming and it offers and higher luminous efficiency, with a color rendering index of the white range greater than 95. Very quick setup of the functions thanks to the potentiometer knob

Key Features



● VariWhiteCOB LED



● CRI >95 (CRI > 95.9 @ 3.200 K - CRI > 96.5 @ 5.600 K)
TLCI ≥ 97.7



● CCT 2.700 K → 6.500 K



● High lumen flux and flat field



● Swappable lens tubes between 5° - 90°



● Four blade framing system, each shutter blade is adjustable for radial position and angle



● Flame-retardant technopolymer reinforced with fiberglass



● Custom color on request (optional)



● Manual (standard) or Pole Operated Pan-Tilt (Optional)

General	
● LED Source	VariWhite COB LED
● CCT Range	2.700 K → 6.500 K
● Color Rendition Average	CRI >95 (CRI > 95.9 @ 3.200 K - CRI > 96.5 @ 5.600 K) TLCI ≥ 97.7
● Dimming	8 or 16 bit, 5 selectable curves: Exponential, Logarithmic, Linear, Linear, Halo and Standard
● Dimming Smooth Selection	Fast, Slow and Very Slow
● Strobe	Electronic strobe, synchronized, random, pulse effect
● Available Optics	Swappable lens tubes between 5°-90°
● Camera flicker control/Hz range	Yes: 20.000 Hz
● Calibrated Cob	Yes
● L80 Rating (hours to 80% output)	50.000 Hours
● Pattern Projection	Yes
● Pattern Size	A or B
Electrical	
● Voltage Input	80-264 V, 50-60 Hz - Auto-sensing
● Power Consumption	220 W Maximum - 0.97 A at 230 V, 1.95 A at 115 V - cosφ: 0.98
● Power Connection	In and Out PowerCON TRUE1 Top connectors, 1.5 m (4.9 ft) PowerCon cable without power plugIn and Out
● Data Connection	In and Out DMX 5 pin locking XLR connectors
Thermal	
● Ambient Operating Temperature	0°C - +40°C (32°F - 104°F)
● Fan (controllable)	Yes, 4 different settings: Silent, Studio, Auto, DMX Regulated
Control	
● Protocols	DMX-512, RDM (Remote Device Management), Wireless (optional by LumenRadio)
● RDM configuration	Yes
● DMX Channels	5 / 2 / 1
● Display	Graphic OLED with on-board selector for quick setting
● Software Upload	Through DMX with RDM Upgrade USB interface (code: AC10011A001)
Physical	
● Yoke	Manual (standard) or Pole Operate Pan-Tilt (optional)
● Materials	Flame-retardant technopolymer reinforced with fiberglass
● Framing System	Four stainless steel shutter blades in a two-plane assembly, 0.40mm (AISI 316)
● Weight	Body: 6 Kg / 13.23 lbs - With 28°-40° Optic: 8.5 Kg / 18.74 lbs
● Length	Body: 362 mm / 14.25 in - With 28°-40° Optic: 601 mm / 23.66 in
● Height	189 mm / 7.44 in - With bracket: 372 mm / 14.64 in
● Width	355 mm / 13.97 in
● IP Rating	IP20 (available IP65 LEDko Ext Series)
● Color options	Black (standard), custom color on request (optional)
Included accessories	
GKIT17 (USA) / GKIT16 (EU)	1.5 m power cable with PowerCON TRUE1 Top and bare ends
BC10011A106	Metal Gobo Holder

Optics

BC10011A017	Profile Zoom 15°-35°
BC10011A019	Profile Zoom 25°-50°
BC10011A003	Profile Zoom 28°-40°
BC10011A002	Soft Profile Fresnel Zoom 14°-40°
BC10011A001	Soft Profile PC Zoom 11°-38°
BC10011A000	Front Barrel with Burnished Blades
BC10011A041	Lens Tube Profile 5°
BC10011A042	Lens Tube Profile 10°
BC10011A023	Lens Tube Profile 14°
BC10011A012	Lens Tube Profile 19°
BC10011A013	Lens Tube Profile 26°
BC10011A015	Lens Tube Profile 36°
BC10011A016	Lens Tube Profile 50°
BC10011A024	Lens Tube Profile 70°
BC10011A025	Lens Tube Profile 90°

General accessories

BC10034A003	4-Leaf Barndoor for Zoom Fresnel optic
BC10011A006	Magnetic Gobo Holder
BC10011A030	Gobo Holder for Glass Gobo
BC10011A010	Iris
BC10011A049	Gobo Holder for Iris Slot
BC10011A047	Hook Clamp, 48-51 mm (Max Load 20 Kg)
BC10011A045	Light Clamp Silver, 48-51 mm (Max 75 Kg)
BC10011A046	Light Clamp Black, 48-51 mm (Max 75 Kg)
BC10011A043	Clamp Silver Flat 13-30 mm/ø15-50 mm (Max 20 Kg)
BC10011A044	Clamp Black Flat 13-30 mm/ø15-50 mm (Max 20 Kg)
BC10011A100	Wireless Kit (LumenRadio)
BC10011A150	Pole Operated Yoke

Accessories for Profile Zoom 15°-35° and 25°-50°
--

BC10011A028	Donut (190.5 mm)
BC10011A027	Half Top Hat (190.5 mm)
BC10011A029	Top Hat (190.5 mm)
BC10011A040	Color Frame Holder (190.5 mm)

Accessories for Soft Profile Zoom (Fresnel, PC) and Profile Zoom 28°-40°
--

BC10011A036	Donut (185 mm)
BC10011A035	Half Top Hat (185 mm)
BC10011A037	Top Hat (185 mm)
ACO4204	Color Frame Holder (185 mm)

Accessories for Lens Tube

BC10011A032	Donut (159 mm)
BC10011A031	Half Top Hat (159 mm)
BC10011A033	Top Hat (159 mm)
BC10011A021	Color Frame Holder (159 mm)



LEDko VariWhite HD + Rear Panel with the new OLED Display



LEDko VariWhite HD + with Pole Operated Yoke

LEDko VariWhite HD + Pole Operated Yoke/Rear Panel

DMX Charts

5 Channels




01 → Master Dimmer
02 → Dimmer Fine
03 → White Tone
04 → Strobe Effect
05 → Special Functions

2 Channels






01 → Master Dimmer
02 → White Tone

1 Channel

01 → Master Dimmer

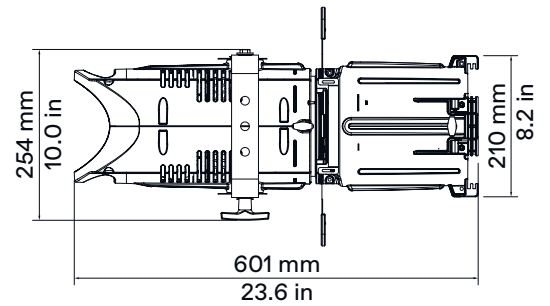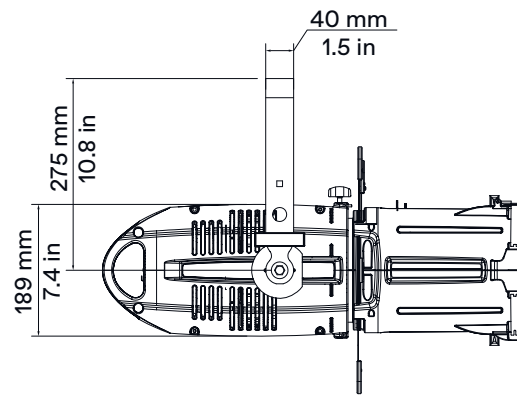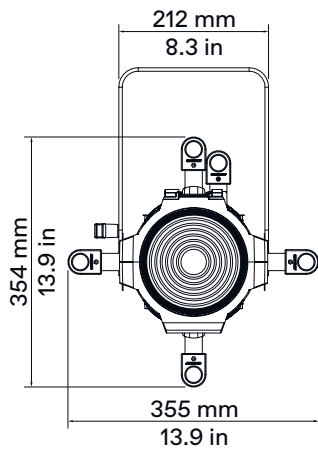



* with Profile Zoom 28°/40° optic

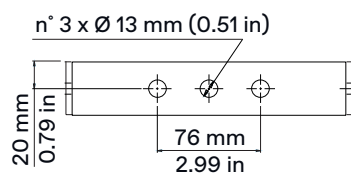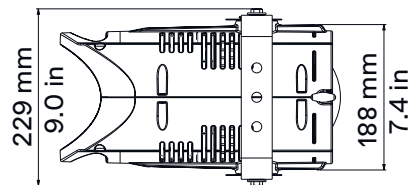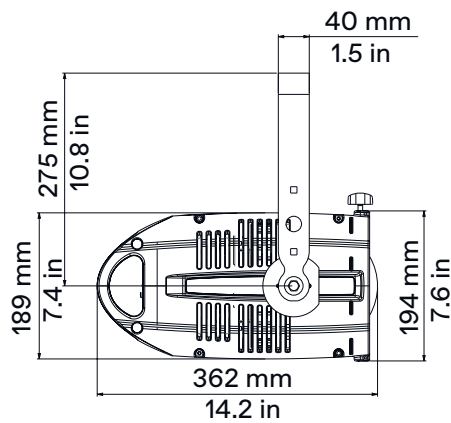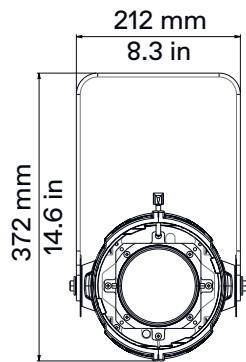



*Standard gobo holder


*Yoke

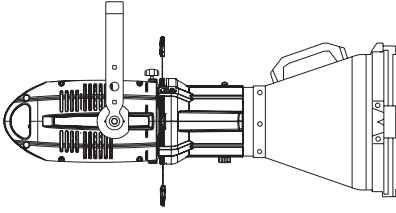
Product	Optics	Length	Weight
	Lens Tube Profile 10°	900 mm (35.4 in)	9 Kg (19.8 lbs)

Product	Optics	Length	Weight
	Lens Tube Profile 14°	750 mm (35.4 in)	9 Kg (19.8 lbs)
	Lens Tube Profile 70°	750 mm (35.4 in)	8.68 Kg (19.14 lbs)

Product	Optics	Length	Weight
	Lens Tube Profile 19°	670 mm (26.3 in)	9.15 Kg (20.17 lbs)
	Lens Tube Profile 26°	670 mm (26.3 in)	9.05 Kg (19.95 lbs)
	Lens Tube Profile 36°	670 mm (26.3 in)	9.35 Kg (20.60 lbs)
	Lens Tube Profile 50°	670 mm (26.3 in)	9.05 Kg (19.95 lbs)

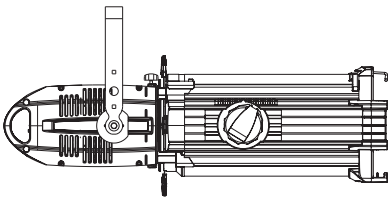Product	Optics	Length	Weight
	Profile Zoom 15°-35°	886 mm (34.9 in)	13.05 Kg (28.77 lbs)

Product	Optics	Length	Weight
	Profile Zoom 25°-50°	783 mm (30.8 in)	11.2 Kg (24.69 lbs)

Product	Optics	Length	Weight
	Profile Zoom 28°-40°	601 mm (23.7 in)	8.3 Kg (18.3 lbs)
	Soft Profile Fresnel Zoom 14°-40°	601 mm (23.7 in)	7.75 Kg (17.09 lbs)
	Soft Profile PC Zoom 11°-38°	601 mm (23.7 in)	8.25 Kg (18.19 lbs)



Museum - Gallerie d'Italia, Milan

Product	LEDko VW
CCT	2.700K → 6.500K
CRI	>95
Optical	Lens 14° and 19°
Light Designer	Giambattista Buongiorno



Broadcast - RSI Radiotelevisione Svizzera, Switzerland

Product	LEDko VW
CCT	2.700K → 6.500K
CRI	>95




Dealership - Autostadt Audi, Wolfsburg

Product	LEDko VW
CCT	2.700K → 6.500K
CRI	>95

LEDko VariWhite HD + - Lens Tube Profile


Optic: Lens Tube Profile 10°

Distance(m)	3	6	9	12	15	18	21	24	27	30	
lux	3.200K	67.816	16.954	7.535	4.239	2.713	1.884	1.384	1.060	837	678
	5.600K	80.545	20.136	8.949	5.034	3.222	2.237	1.644	1.259	994	805
Diameter Ø (m)	0,54	1,07	1,61	2,14	2,68	3,21	3,75	4,28	4,82	5,35	
lux	3.200K	CRI 96.5	TLCI 98.3								
	5.600K	CRI 96.8	TLCI 97.8								

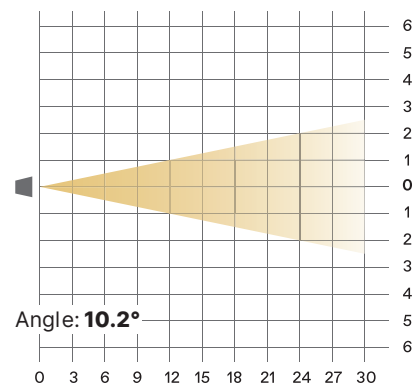


Optic: Lens Tube Profile 14°

Distance(m)	3	6	9	12	15	18	21	24	27	30	
lux	3.200K	35.362	8.840	3.929	2.210	1.414	982	722	553	437	354
	5.600K	41.236	10.309	4.582	2.577	1.649	1.145	842	644	509	412
Diameter Ø (m)	0,71	1,42	2,13	2,84	3,55	4,26	4,97	5,68	6,39	7,10	
lux	3.200K	CRI 96.6	TLCI 98.1								
	5.600K	CRI 96.8	TLCI 97.9								

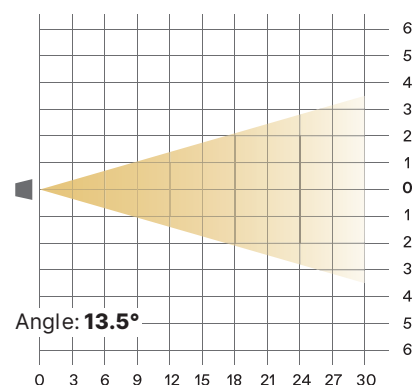


Optic: Lens Tube Profile 19°

Distance(m)		3	6	9	12	15	18	21	24	27	30
lux	3.200K	19.801	4.950	2.200	1.238	792	550	404	309	244	198
	5.600K	23.972	5.993	2.664	1.498	959	666	489	375	296	240
Diameter Ø (m)		0,96	1,92	2,88	3,84	4,81	5,77	6,73	7,69	8,65	9,61
lux	3.200K	CRI 96.5	TLCI 98.1								
	5.600K	CRI 96.6	TLCI 97.9								

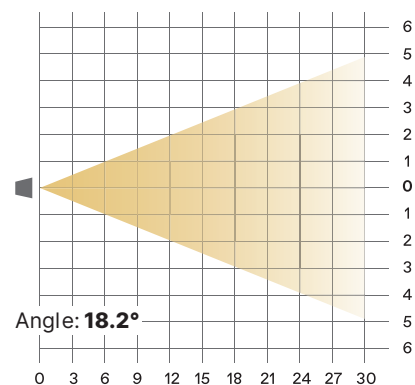

Optic: Lens Tube Profile 26°


Distance(m)	1	2	3	4	5	6	7	8	9	10	
lux	3.200K	86485	21621	9609	5405	3459	2402	1765	1351	1068	865
	5.600K	115003	28751	12778	7188	4600	3195	2347	1797	1420	1150
Diameter Ø (m)	0,45	0,91	1,36	1,82	2,27	2,73	3,18	3,63	4,09	4,54	
lux	3.200K	CRI 96.1	TLCI 98.2								
	5.600K	CRI 96.6	TLCI 97.9								

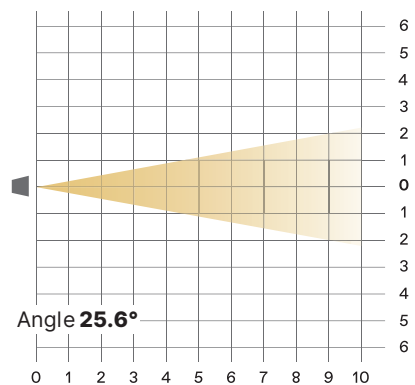

LEDko VariWhite HD + - Lens Tube Profile


Optic: Lens Tube Profile 36°

Distance(m)	1	2	3	4	5	6	7	8	9	10	
lux	3.200K	49.147	12.287	5.461	3.072	1.966	1.365	1.003	768	607	491
	5.600K	59.927	14.982	6.659	3.745	2.397	1.665	1.223	936	740	599
Diameter Ø (m)	0,61	1,22	1,83	2,44	3,05	3,66	4,27	4,88	5,49	6,10	
lux	3.200K	CRI 96.2	TLCI 98.1								
	5.600K	CRI 96.7	TLCI 97.9								

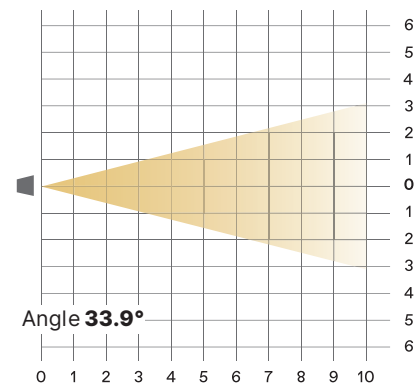


Optic: Lens Tube Profile 50°

Distance(m)		1	2	3	4	5	6	7	8	9	10
lux	3.200K	28.665	7.166	3.185	1.792	1.147	796	585	448	354	287
	5.600K	34.741	8.685	3.860	2.171	1.390	965	709	543	429	347
Diameter Ø (m)		0,96	1,92	2,87	3,83	4,79	5,75	6,71	7,67	8,62	9,58
lux	3.200K	CRI 96.4	TLCI 98.1								
	5.600K	CRI 96.7	TLCI 97.9								

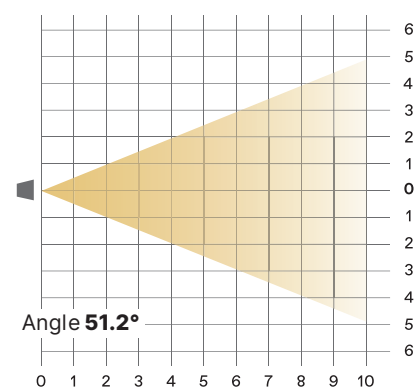


Optic: Lens Tube Profile 70°

Distance(m)		1	2	3	4	5	6	7	8	9	10
lux	3.200K	14.342	3.586	1.594	896	574	398	293	224	177	143
	5.600K	18.855	4.714	2.095	1.178	754	524	385	295	233	189
Diameter Ø (m)		1,33	2,66	3,99	5,32	6,64	7,97	9,30	10,63	11,96	13,29
lux	3.200K	CRI 96.4	TLCI 98.2								
	5.600K	CRI 96.8	TLCI 97.9								

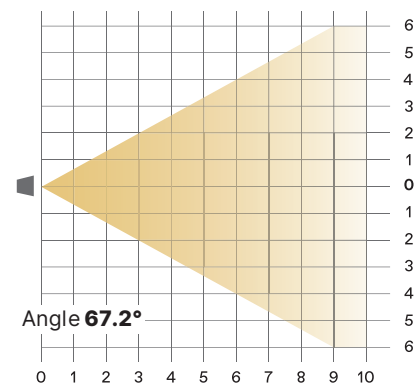


LEDko VariWhite HD + - Profile Zoom 15°-35°**Optic: Zoom Minimum**


Distance(m)	1	2	3	4	5	6	7	8	9	10	
lux	3.200K	236.229	59.057	26.248	14.764	9.449	6.562	4.821	3.691	2.916	2.362
	5.600K	287.385	71.846	31.932	17.962	11.495	7.983	5.865	4.490	3.548	2.874
Diameter Ø (m)	0,27	0,53	0,80	1,07	1,33	1,60	1,87	2,13	2,40	2,67	
lux	3.200K	CRI 96.4	TLCI 98.1								
	5.600K	CRI 96.5	TLCI 97.8								

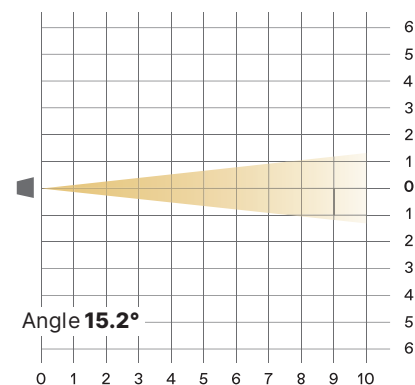**Optic: Zoom Medium**

Distance(m)		1	2	3	4	5	6	7	8	9	10
lux	3.200K	113.386	28.347	12.598	1.087	4.535	3.150	2.314	1.772	1.400	1.134
	5.600K	125.979	31.495	13.998	7.874	5.039	3.499	2.571	1.968	1.555	1.260
Diameter Ø (m)		0,40	0,81	1,21	1,61	2,02	2,42	2,82	3,23	3,63	4,03
lux	3.200K	CRI 96.4	TLCI 98.2								
	5.600K	CRI 96.8	TLCI 97.6								

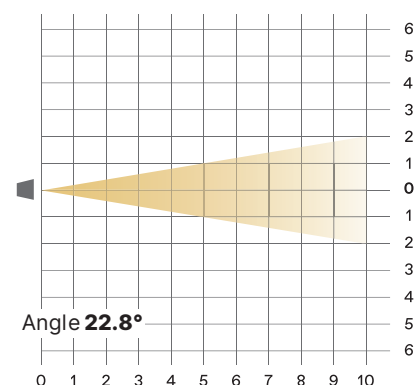
**Optic: Zoom Maximum**

Distance(m)	1	2	3	4	5	6	7	8	9	10	
lux	3.200K	72.177	18.044	8.020	4.511	2.887	2.005	1.473	1.128	891	722
	5.600K	87.514	21.879	9.724	5.470	3.501	2.431	1.786	1.367	1.080	875
Diameter Ø (m)	0,54	1,08	1,61	2,15	2,69	3,23	3,76	4,30	4,84	5,38	
lux	3.200K	CRI 96.3	TLCI 98.1								
	5.600K	CRI 96.7	TLCI 97.8								

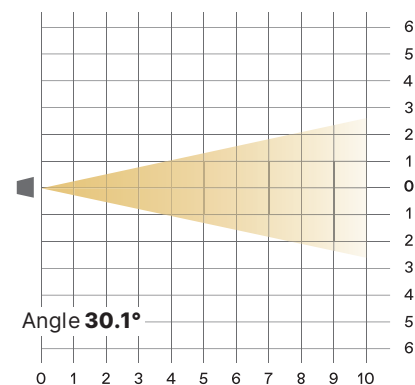


LEDko VariWhite HD + - Profile Zoom 25°-50°**Optic: Zoom Minimum**


Distance(m)	1	2	3	4	5	6	7	8	9	10	
lux	3.200K	69.188	17.297	7.688	4.324	2.768	1.922	1.412	1.081	854	692
	5.600K	81.683	20.421	9.076	5.105	3.267	2.269	1.667	1.276	1.008	817
Diameter Ø (m)	0,49	0,98	1,47	1,96	2,46	2,95	3,44	3,93	4,42	4,91	
lux	3.200K	CRI 96.2	TLCI 98.2								
	5.600K	CRI 96.7	TLCI 97.8								

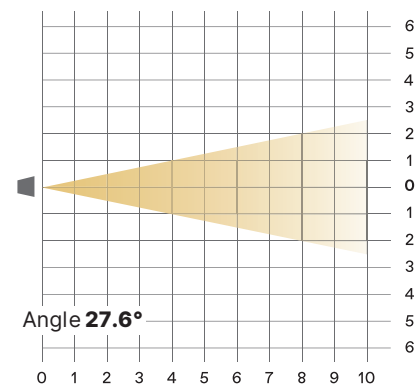**Optic: Zoom Medium**

Distance(m)		1	2	3	4	5	6	7	8	9	10
lux	3.200K	43.120	10.780	4.791	2.695	1.725	1.198	880	674	532	431
	5.600K	52.773	13.193	5.864	3.298	2.111	1.466	1.077	825	652	528
Diameter Ø (m)		0,64	1,27	1,91	2,55	3,18	3,82	4,45	5,09	5,73	6,36
lux	3.200K	CRI 95.9	TLCI 98								
	5.600K	CRI 96.7	TLCI 97.7								

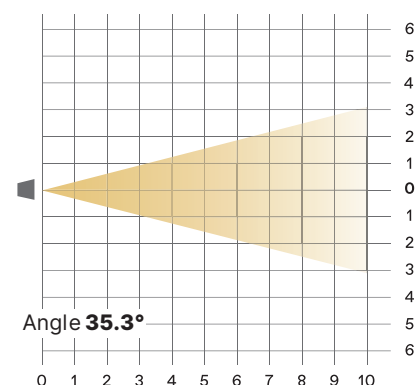
**Optic: Zoom Maximum**

Distance(m)	1	2	3	4	5	6	7	8	9	10	
lux	3.200K	31066	7767	3452	1942	1243	863	634	485	384	311
	5.600K	38955	9739	4328	2435	1558	1082	795	609	481	396
Diameter Ø (m)	0,78	1,56	2,35	3,13	3,91	4,69	5,47	6,25	7,04	7,82	
lux	3.200K	CRI 95.8	TLCI 98.1								
	5.600K	CRI 96.7	TLCI 97.7								

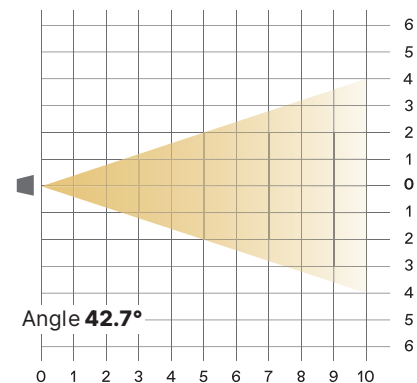


LEDko VariWhite HD + - Profile Zoom 28°-40°**Optic: Zoom Minimum**


Distance(m)		1	2	3	4	5	6	7	8	9	10
lux	3.200K	95.403	23.851	10.600	5.963	3.816	2.650	1.947	1.491	1.178	954
	5.600K	115.493	28.873	12.833	7.218	4.620	3.208	2.357	1.805	1.426	1.155
Diameter Ø (m)		0,45	0,90	1,35	1,80	2,24	2,69	3,14	3,59	4,04	4,49
lux	3.200K	CRI 96.5	TLCI 98.3								
	5.600K	CRI 96.9	TLCI 97.9								

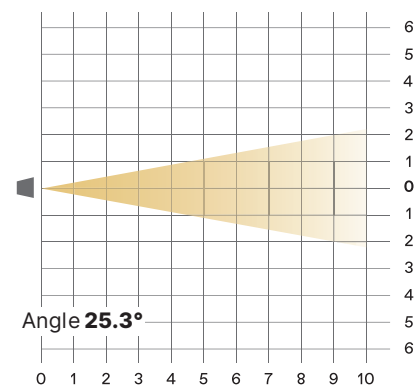**Optic: Zoom Medium**

Distance(m)	1	2	3	4	5	6	7	8	9	10	
lux	3.200K	63.161	15.790	7.018	3.948	2.526	1.754	1.289	987	780	632
	5.600K	77.028	19.257	8.559	4.814	3.081	2.140	1.572	1.204	951	770
Diameter Ø (m)	0,58	1,15	1,73	2,31	2,89	3,46	4,04	4,62	5,20	5,77	
lux	3.200K	CRI 96.4	TLCI 98.2								
	5.600K	CRI 96.8	TLCI 97.9								

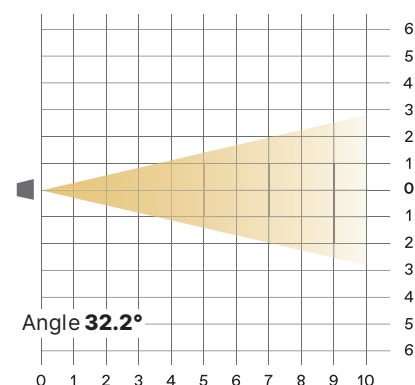
**Optic: Zoom Maximum**

Distance(m)	1	2	3	4	5	6	7	8	9	10	
lux	3.200K	42287	10572	4699	2643	1691	1175	863	661	522	423
	5.600K	50911	12728	5657	3182	2036	1414	1039	795	628	509
Diameter Ø (m)	0,71	1,41	2,12	2,83	3,53	4,24	4,94	5,65	6,36	7,04	
lux	3.200K	CRI 96.4	TLCI 98.2								
	5.600K	CRI 97	TLCI 97.9								

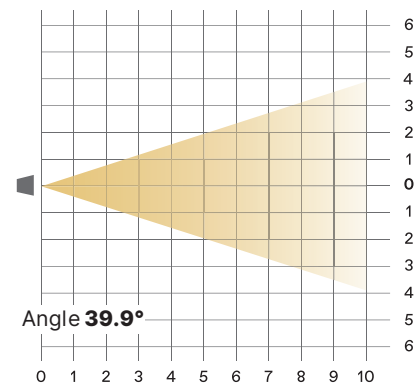


LEDko VariWhite HD + - Soft Profile Fresnel Zoom 14°-40°**Optic: Zoom Minimum**

Distance(m)	1	2	3	4	5	6	7	8	9	10	
lux	3.200K	61.593	15.398	6.844	3.850	2.464	1.711	1.257	962	760	616
	5.600K	74.284	18.571	8.254	4.643	2.971	2.063	1.516	1.161	917	743
1/2 P.A 14° Ø (m)	0,25	0,49	0,74	0,98	1,23	1,47	1,72	1,96	2,21	2,46	
1/10 P.A 27° Ø (m)	0,48	0,96	1,44	1,92	2,40	2,88	3,36	3,84	4,32	4,80	
lux	3.200K	CRI 96.4	TLCI 98.2								
	5.600K	CRI 97.1	TLCI 97.7								

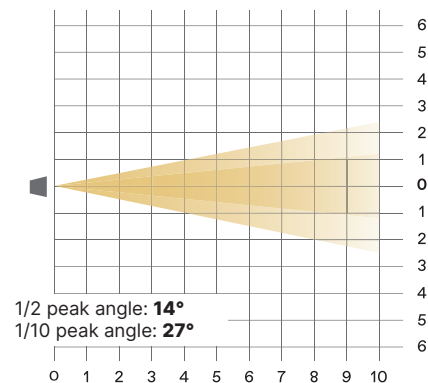
**Optic: Zoom Maximum**

Distance(m)	1	2	3	4	5	6	7	8	9	10	
lux	3.200K	39.136	9.784	4.348	2.446	1.565	1.087	799	612	483	391
	5.600K	47.687	11.922	5.299	2.980	1.907	1.325	973	745	589	477
1/2 P.A 24° Ø (m)	0,43	0,85	1,28	1,70	2,13	2,55	2,98	3,40	3,83	4,25	
1/10 P.A 40° Ø (m)	0,73	1,46	2,18	2,91	3,64	4,37	5,10	5,82	6,55	7,28	
lux	3.200K	CRI 96.5	TLCI 98.1								
	5.600K	CRI 97.2	TLCI 97.8								

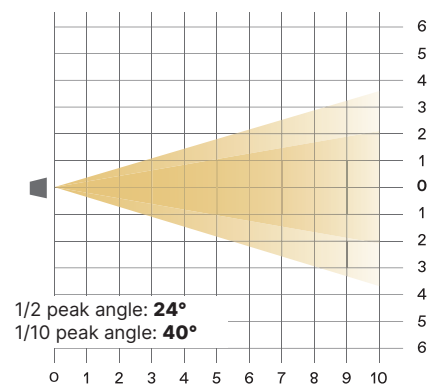


LEDko VariWhite HD + - Soft Profile PC Zoom 11°-38°**Optic: Zoom Minimum**

Distance(m)		1	2	3	4	5	6	7	8	9	10
lux	3.200K	112.651	28.163	12.517	7.041	4.506	3.129	2.299	1.760	1.391	1.127
	5.600K	136.269	34.067	15.141	8.517	5.451	3.785	2.781	2.129	1.682	1.363
1/2 P.A 11° Ø (m)		0,19	0,39	0,58	0,77	0,96	1,16	1,35	1,54	1,73	1,93
1/10 P.A 21° Ø (m)		0,37	0,74	1,11	1,48	1,85	2,22	2,59	2,97	3,34	3,71
lux	3.200K	CRI 96.7	TLCI 98.5								
	5.600K	CRI 97	TLCI 97.7								

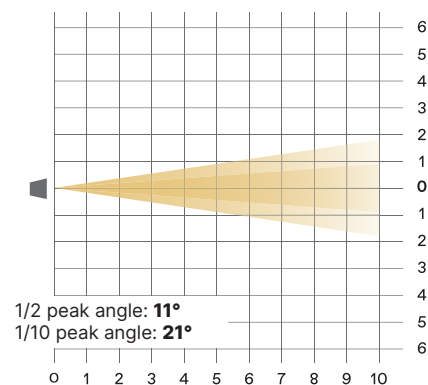**Optic: Zoom Maximum**

Distance(m)	1	2	3	4	5	6	7	8	9	10	
lux	3.200K	55027	13757	6114	3439	2201	1529	1123	860	679	550
	5.600K	68208	17052	7579	4263	2728	1895	1392	1066	842	682
1/2 P.A 22° Ø (m)	0,39	0,78	1,17	1,56	1,94	2,33	2,72	3,11	3,50	3,89	
1/10 P.A 38° Ø (m)	0,69	1,38	2,07	2,75	3,44	4,13	4,82	5,51	6,20	6,89	
lux	3.200K	CRI 97.1	TLCI 98.5								
	5.600K	CRI 96.6	TLCI 97.9								

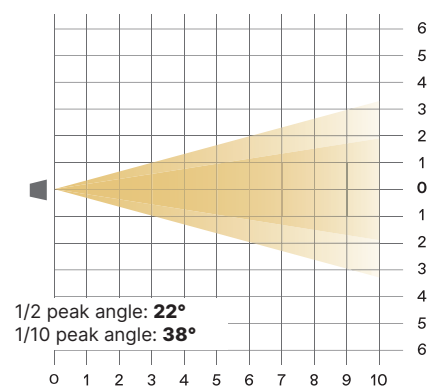

● Coemar Lighting S.r.l.

Via Carpenedolo, 90
46043, Castiglione delle Stiviere (MN) – Italy

P. +39 0376 1514412
M1. info@coemar.com
M2. service@coemar.com
W. coemar.com

P.iva – C.f. 02415330204

