


PHOTOMETRICAL DATA

Mini LEDko Profile Fixed White (High CRI)


Optic: Lens Tube Profile 19°

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emitance (lux)	3.000K	9.531	2.383	1059	596	381	265	195	149	118	95
	5.600K	10.503	2.626	1.167	656	420	292	214	164	130	105
Diameter ø (m)	0,30	0,60	0,90	1,20	1,49	1,79	2,09	2,39	2,69	2,99	
3.200K	CRI 96	TLCI 99									
5.000K	CRI 98	TLCI 99									

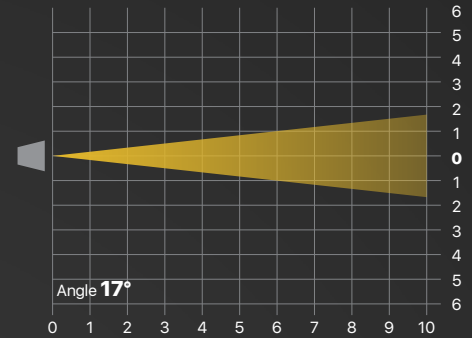


Optic: Lens Tube Profile 26°

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emitance (lux)	3.000K	4.815	1.204	535	301	193	134	98	75	59	48
	5.600K	5.688	1.422	632	356	228	158	116	89	70	57
Diameter ø (m)	0,41	0,81	1,22	1,63	2,03	2,44	2,85	3,26	3,66	4,07	
3.200K	CRI 96	TLCI 98									
5.000K	CRI 98	TLCI 99									

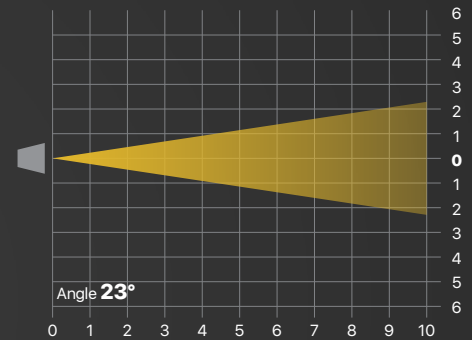


Optic: Lens Tube Profile 36°

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emitance (lux)	3.000K	3.069	767	341	192	123	85	63	48	38	31
	5.600K	3.690	923	410	231	148	103	75	58	46	37
Diameter ø (m)	0,54	1,07	1,61	2,14	2,68	3,22	3,75	4,29	4,82	5,36	
3.200K	CRI 97	TLCI 98									
5.000K	CRI 97	TLCI 99									

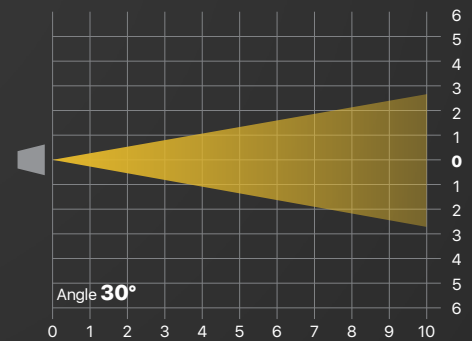

Optic: Lens Tube Profile 50°

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emitance (lux)	3.000K	1.512	378	168	95	60	42	31	24	19	15
	5.600K	1.683	421	187	105	67	47	34	26	21	17
Diameter ø (m)	0,91	1,82	2,73	3,65	4,56	5,47	6,38	7,29	8,20	9,11	
3.200K	CRI 96	TLCI 99									
5.000K	CRI 97	TLCI 99									

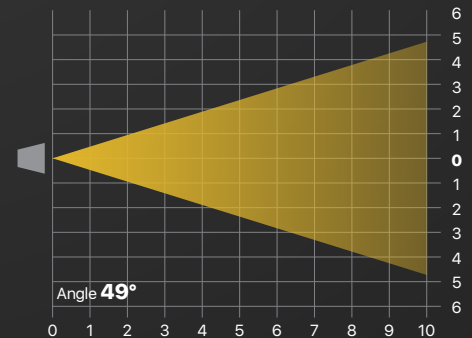


PHOTOMETRICAL DATA

Mini LEDko Profile Fixed White (High CRI)


Optic: Zoom Profile 15°-35° - Narrow Zoom

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emitance (lux)	3.000K	12.834	3.209	1.426	802	513	357	262	201	158	128
	5.600K	14.733	3.683	1.637	921	589	409	301	230	182	147
Diameter ø (m)	0.25	0.49	0.74	0.98	1.23	1.47	1.72	1.96	2.21	2.46	
3.200K	CRI 96	TLCI 99									
5.000K	CRI 97	TLCI 99									

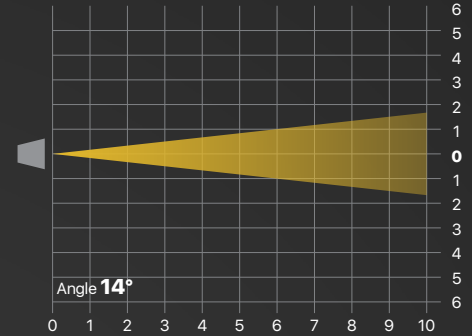


Optic: Zoom Profile 15°-35° - Medium Zoom

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emitance (lux)	3.000K	4.788	1.197	532	299	192	133	98	75	59	48
	5.600K	6.012	1.503	668	376	240	167	123	94	74	60
Diameter ø (m)	0.44	0.89	1.33	1.77	2.22	2.66	3.10	3.55	3.99	4.43	
3.200K	CRI 97	TLCI 98									
5.000K	CRI 99	TLCI 99									

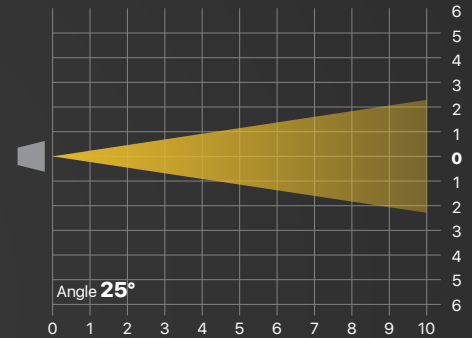

Optic: Zoom Profile 15°-35° - Wide Zoom

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emitance (lux)	3.000K	2.574	644	286	161	103	72	53	40	32	26
	5.600K	3.258	815	362	204	130	91	66	51	40	33
Diameter ø (m)	0.63	1.26	1.89	2.52	3.15	3.78	4.41	5.04	5.68	6.31	
3.200K	CRI 97	TLCI 99									
5.000K	CRI 98	TLCI 99									

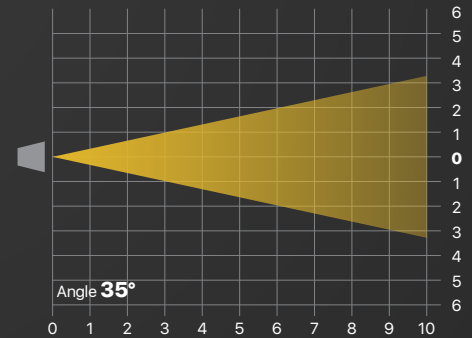


PHOTOMETRICAL DATA

Mini LEDko Profile Fixed White CRI 80


Optic: Lens Tube Profile 19°

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emitance (lux)	4.000K	12.656	3.164	1.406	791	506	352	258	198	156	127
	5.600K	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
Diameter ø (m)	0,30	0,60	0,90	1,20	1,49	1,79	2,09	2,39	2,69	2,99	
4.000K	CRI 80	TLCI 64									

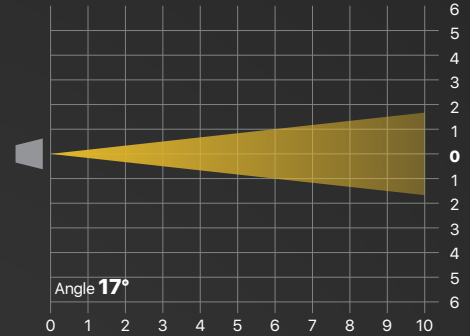


Optic: Lens Tube Profile 26°

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emitance (lux)	4.000K	7.218	1.805	802	451	289	201	147	113	89	72
	5.600K	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
Diameter ø (m)	0,41	0,81	1,22	1,63	2,03	2,44	2,85	3,26	3,66	4,07	
4.000K	CRI 80	TLCI 64									

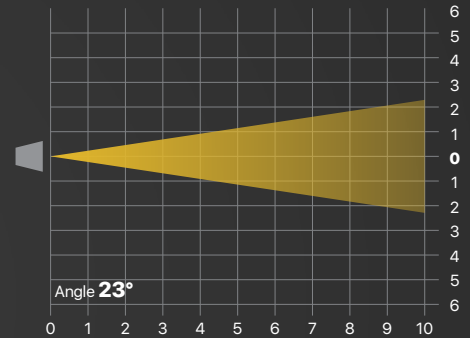

Optic: Lens Tube Profile 36°

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emitance (lux)	4.000K	4.435	1.109	493	277	177	123	91	69	55	44
	5.600K	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
Diameter ø (m)	0,54	1,07	1,61	2,14	2,68	3,22	3,75	4,29	4,82	5,36	
4.000K	CRI 80	TLCI 64									

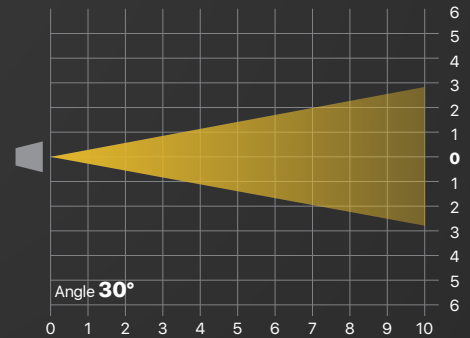

Optic: Lens Tube Profile 50°

Distance (m)	1	2	3	4	5	6	7	8	9	10	
Luminous Emitance (lux)	4.000K	2.187	547	243	137	87	61	45	34	27	22
	5.600K	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.	n.a.
Diameter ø (m)	0,91	1,82	2,73	3,65	4,56	5,47	6,38	7,29	8,20	9,11	
4.000K	CRI 80	TLCI 64									

