

# Risalto LED M VariWhite +

Product code: F134G000M (Fresnel) F134G000N (PC)

Last update: 05/06/2023






Risalto LED M VariWhite +

## Introducing

• Designed with + electronic and a new OLED display, this Fresnel or PC projector is the evolution of the Risalto Led VW. The + electronic with advanced LED controller enables a smooth dimming and it offers and higher luminous efficiency, with a color rendering index of the white range greater than 95 Very quick setup of the functions thanks to the potentiometer knob

## Key Features







• High CRI> 95



CCT Continuously Variable 2.800 K → 6.500 K



High lumen flux and flat field



- Fresnel or PC lenses (diameter 150 mm / 5.9 in)
- Zoom range from 11° to 82° (with Fresnel lens)
- Zoom range from 11° to 66° (with PC lens)



• Steel and die cast aluminium with High-quality epoxy powder coating protects against corrosion



Custom color on request (optional)



Manual (standard) or Pole Operated Pan-Tilt (optional)



European Conformity certification



#### General

LED Source	VariWhite LEDs Module		
• CCT Range	Ontinuously Variable 2.800 K → 6.500 K		
Color Rendition Average	CRI> 95		
Dimming	8 or 16 bit, 5 selectable curves: Exponential, Logarithmic, Linear, Halo and Standard		
Dimming Smooth Selection	Fast, Slow and Very Slow		
• Strobe	Electronic strobe, synchronized, random, pulse effect		
● Lens	Glass Fresnel or PC lenses (diameter 150 mm / 5.9 in)		
Optical	Zoom range from 11° to 82° (with Fresnel lens)		
•	Zoom range from 11° to 66° (with PC lens)		
Camera flicker control/Hz range	Flicker-free operation with LEDs frequency controlled via DMX from 600 to 20.000 Hz		
Calibrated Cob	Yes		
L80 Rating	50.000 Hours		
(hours to 80% output)			

# Electrical

Voltage Input	90-264 V, 50/60 Hz, auto-sensing
<ul> <li>Power Consumption</li> </ul>	200 W Maximum - 0.92 A at 230 V, 1.83 A at 115 V - cosφ 0.95
<ul><li>Power Connection</li></ul>	In and Out PowerCON TRUE1 Top connectors, 1.5 m (4.9 ft) PowerCon cable without power plug
Data Connection	In and Out DMX 5 pin locking XLR connectors

#### Thermal

<ul> <li>Ambient Operating Temperature</li> </ul>	0°C - +40°C (32°F - 104°F)
• Fan (controllable)	Yes, 4 different settings: Silent, Studio, Auto, DMX Regulated

# Control

<ul><li>Protocols</li></ul>	DMX-512, RDM (Remote Device Management), Wireless (optional By LumenRadio)
<ul> <li>RDM configuration</li> </ul>	Yes
<ul><li>DMX Channels</li></ul>	5/2/1
<ul><li>Display</li></ul>	Graphic OLED with on-board selector for quick setting
Software Upload	Through DMX with RDM Upgrade USB interface (code AC10011A001)

# Physical

● Yoke	Manual (standard) or Pole Operated Pan-Tilt (optional)	
<ul><li>Materials</li></ul>	Steel and die cast aluminium with High-quality epoxy powder coating protects against corrosio	
Weight	8.5 Kg / 18.74 lbs	
Length	413 mm / 16.26 in	
• Height	218 mm/ 8.58 in - With bracket: 348 mm / 13.70 in	
• Width	281 mm / 11.06 in	
IP Rating	IP20	
Color options	Black (standard), custom color on request (optional)	

# General accessories

BC10034A003	4-Leaf Barndoor (included)
GKIT17 (USA) / GKIT16 (EU)	1.5 m (4.9 ft) power cable with PowerCON TRUE1 Top and bare ends (included)
BC10034A006	Color frame holder (optional)



3






PC lens

Risalto Led + Rear Panel / PC lens

DMX Charts


5 Channels	2 Channel	1 Channel
01 → Master Dimmer	01 → Master Dimmer	01 → Master Dimmer
02 → Dimmer Fine	02 → White Tone	
03 → White Tone		
04 → Strobe		
05 → Special Functions		



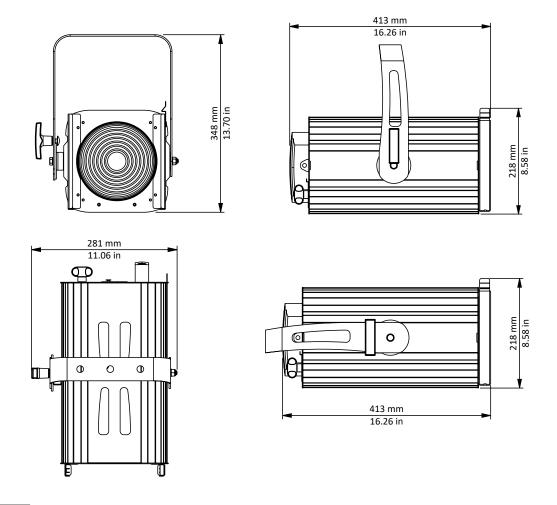

Drawing Size

# 4-Leaf Barndoor

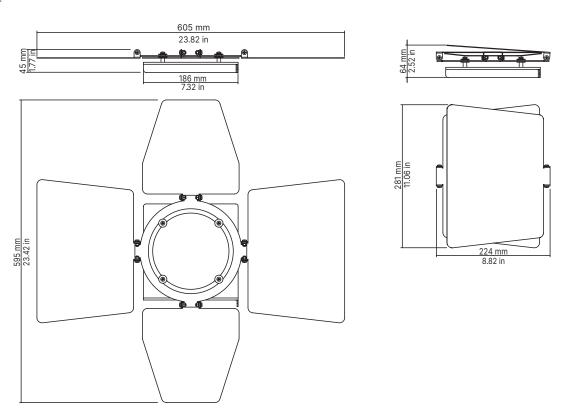



# • Coemar Lighting S.r.l.

Via Carpenedolo, 90 46043, Castiglione delle Stiviere (MN) – Italy

P. +39 0376 1514412 M1. info@coemar.com M2. service@coemar.com W. coemar.com

P.iva - C.f. 02415330204





