

Panorama ACL Daylight

Product code:
HC10077A000

Last update:
10/05/2023



Panorama ACL

Key Features

-  ● 78 Daylight LEDs
-  ● CRI > 80 or CRI > 90
-  ● CCT 5.600 K
-  ● IP65
-  ● 3° lenses
-  ● Passive cooling and fan-free
-  ● Die-casting aluminium
-  ● Custom color on request (optional)
-  ● European Conformity certification

General

● LED Source	78 Daylight LEDs
● CCT Range	● ● ● ● ● 5.600 K
● Color Rendering Index	CRI> 80 or CRI> 90
● Lumen	24322
● Dimming	0% to 100%
● Dimming Smooth Selection	Fast, Slow and Very Slow
● Available Optics	3° lenses
● L80 Rating (hours to 80% output)	50.000 Hours

Electrical

● Voltage Input	100-277 V 50/60 Hz, auto-sensing
● Power Consumption	384 W @ Full
● Power Connection	1.5 m Integral cable Bare Ends
● Data Connection	n°2 × 0.95 (37.4 in) In/Out cables tail without connector and IP68 cable gland

Thermal

● Ambient Operating Temperature	-40°C - +40°C (-40°F - 104°F)
● Active Electronic Thermal	Active electronic thermal management
● Cooling	Passive cooling and fan-free

Control

● Protocols	DMX-512, RDM (Remote Device Management), Wireless (optional By LumenRadio)
● RDM	Yes
● DMX Channels	1 channels
● Firmware upgrade	Through DMX with RDM Upgrade USB interface (code AC10011A001)

Physical

● Yoke	Manual (standard) or Pole Operated Pan-Tilt (Optional)
● Materials	Die-casting aluminium
● Weight	26.5 kg / 22.04 lbs
● Length	488 mm / 19.21 in
● Height	450 mm / 17.71 in
● Width	416 mm / 16.37 in
● IP Rating	IP65
● Color options	Black (standard), custom color on request (optional)




5 Channels

- 01 → Master Dimmer
- 02 → Spare Channel
- 03 → Dimmer Fine
- 04 → Strobe Effect
- 05 → Special Function

1 Channel

- 01 → Master Dimmer

Drawing Size

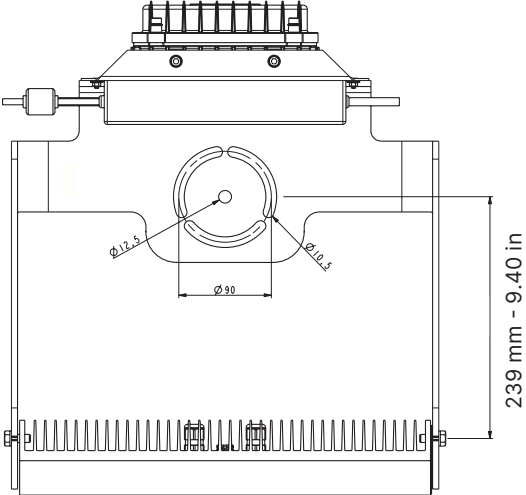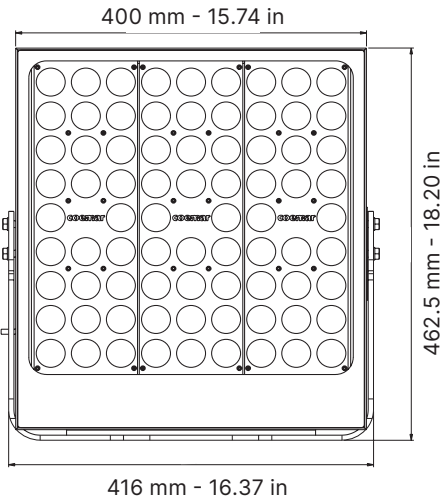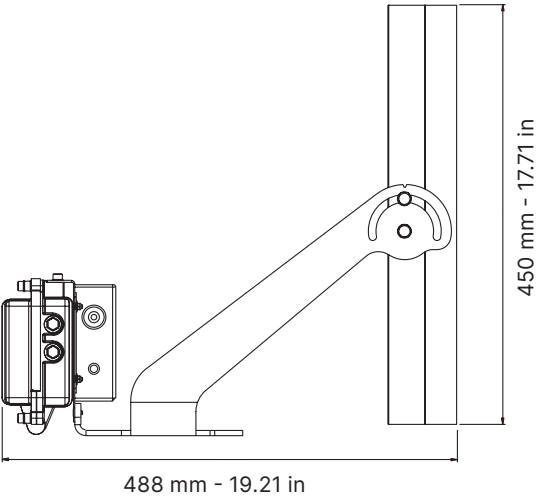



Coemar demo


Product
CCT

Panorama ACL
5.600 K

Panorama ACL

Optic: 1/2 peak angle 3.5°

Distance(m)	10	20	30	40	50	60	70	80	90	100	
lux	3.200K	28.927	7.232	3.214	1.808	1.157	804	590	452	357	289
Diameter Ø (m)	0,61	1,22	1,83	2,44	3,06	3,67	4,28	4,89	5,50	6,11	

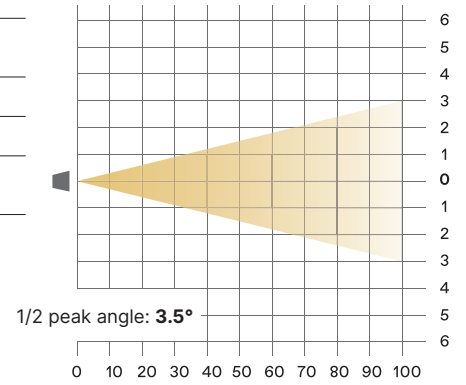

● Coemar Lighting S.r.l.

Via Carpenedolo, 90
46043, Castiglione delle Stiviere (MN) – Italy

P. +39 0376 1514412

M1. info@coemar.com

M2. service@coemar.com

W. coemar.com

P.iva – C.f. 02415330204

