




# StripLite Led RGBW

Product code: F003N024L

## KEY FEATURES

- Ideal digital substitute of the analog strip light
- Cosmetic design for high-end installations
- Thick aluminium, long lasting light source in long lasting body
- Variable light projection angle to adapt the application
- No fan, no maintenance, no noise
- Internal/External gel frame for diffusion filters

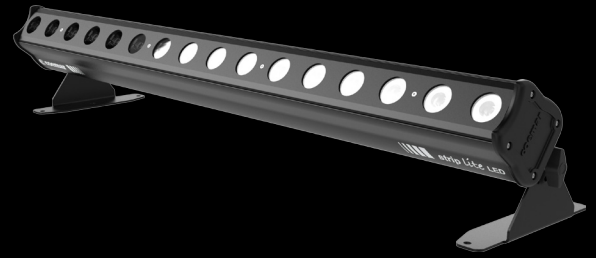

## SPECIFICATIONS

- RGBW color mixing
- Standard lens 12°/35°
- Electronic dimmer
- Synchronized, random or pulse electronic strobe
- Flicker-free operation with LEDs frequency controlled via DMX from 600 to 19.000 Hz
- IP rating: 20 or 65 (weatherproof)

## LIGHT SOURCE

- 16 RGBW high intensity LEDs
- Average LED lifetime: a minimum of 80% of the initial uminous flux will be maintained after approx. 50.000 hours of usage (50.000 LM80)

## PHYSICAL SIZE

- Length: 1010 mm (39.7 in)
- Width: 95 mm (3.7 in)
- Width with optional support: 220 mm (8.7 in)
- Height: 152 mm (5.9 in)
- Height with optional support: 207.4 mm (8.2 in)
- Weight: 7.7 Kg (17.0 lbs)
- Weight with optional support: 8.7 Kg (19.2 lbs)

## CONTROL PROTOCOL AND PROGRAMMING

- USITT DMX512A
- DMX channels: 14 / 8 / 7 / 4 / 1
- Setting, addressing, testing and measurements via LEDs display
- RDM (Remote Device Management)


## ELECTRICAL SPECIFICATIONS AND CONNECTIONS

- AC power: 90-250 V, auto-sensing, 50/60 Hz, 2 m (6.6 ft) integral cable without power plug
- In and Out PowerCon connectors
- Max power consumption: 90 W
- Power consumption: 0.43 A at 230 V, 1.11 A at 90 V -  $\cos\phi$  0,9
- DMX data in/out: 5 pin locking XLR

## ACCESSORIES

- 30° lens kit
- 50° lens kit
- 2 ground-standing feet

## DRAWING SIZE

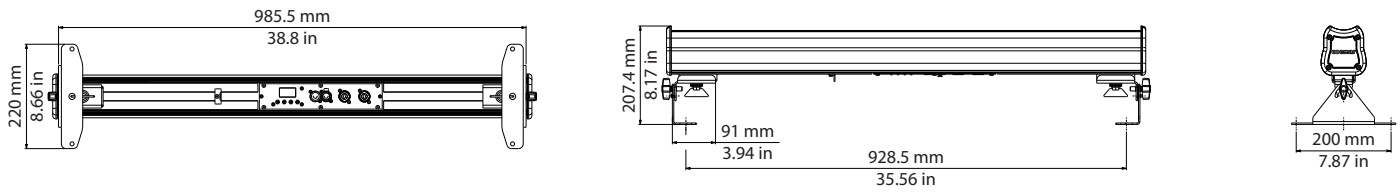

## DMX CHARTS

14 channels		8 channels		4 channels	
1	master dimmer	1	master dimmer	1	red
2	red	2	red	2	green
3	green	3	green	3	blue
4	blue	4	blue	4	white
5	white	5	white		
6	strobe effect	6	strobe effect	1 channel	
7	dimmer fine	7	dimmer fine	1	master dimmer (color temperature settable by display)
8	special function	8	special function		
9	red tone	7 channels			
10	green tone	1	master dimmer		
11	blue tone	2	color temperature		
12	white tone	3	green saturation		
13	green saturation	4	saturation		
14	saturation	5	hue		
		6	dimmer fine		
		7	special function		